







CAD FILE:

ROHS

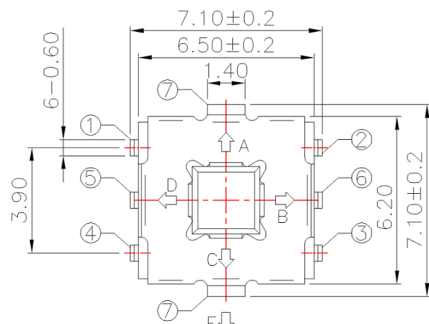

Terminal	①	②	③	④	⑤	⑥	⑦
Direction							
A	●	●			●	●	●
B		●	●		●	●	●
C			●	●	●	●	●
D	●		●	●	●	●	●
E					●	●	

Circuit Diagram

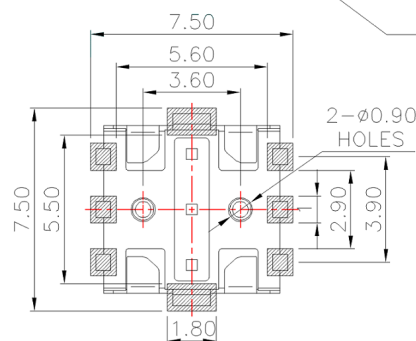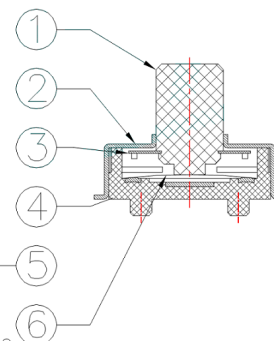

PCB Layout(Pattern side)

NOTE:

Operating Force:

lever portion 140 ± 50 gfPush portion 220 ± 80 gfTravel: 4-direction $5^\circ \pm 2^\circ$ center push 0.2 ± 0.1 mm

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Multi Function Switch			UNIT : mm	DRWG NO.: XB-TM-WX-1201S
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TM-WX-1201S			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.				