





REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名










**ELECTRICAL CHARACTERISTICS**

- 1. RATING: DC 30V 0.1A
- 2. CONTACT RESISTANCE: 100mΩ MAX
- 3. INSULATION RESISTANCE: 100MΩ MIN
- 4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

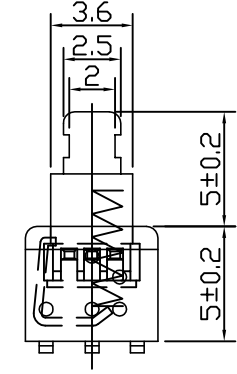

**MECHANICAL CHARACTERISTICS**

- 1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
- 2. OPERATING FORCE: 250±50gf
- 3. MECHANICAL LIFE: 20,000 cycles

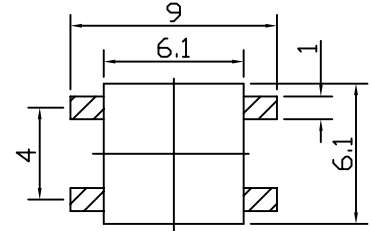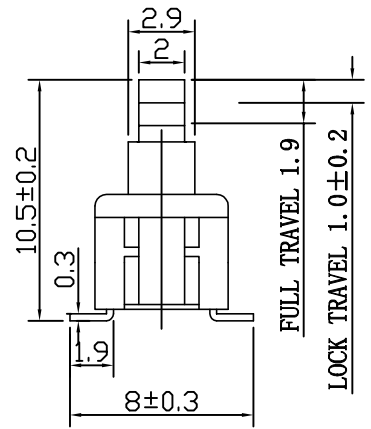

8				
7	LOCK PIN	SUS WIRE	1	NATURAL
6	TERMINAL	BRASS STRIP	4	Ag PLATED
5	CASE	PPA	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

**XB** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE 未指的公差		TITLE	
X. ± 0.15	X. ° ± 5°	名称 XB-5858-4P-LM	
.X ± 0.10	.X° ± 2°	PART NO. 零件编号	
.XX ± 0.05	.XX° ± 1°	DWG NO. 图纸编号	
.XXX ± 0.02	.XXX° ± 0.5°	XB-5858-4P-LM	
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)
		ROBIN	SCALE 比例
			1:1
			PROJ. 项目
			REV.