
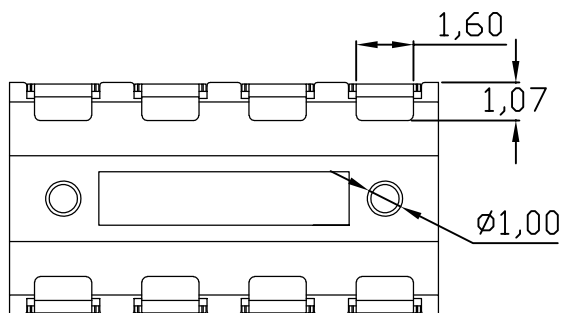
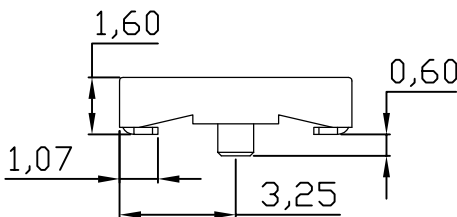
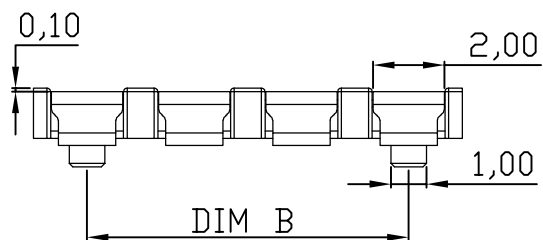
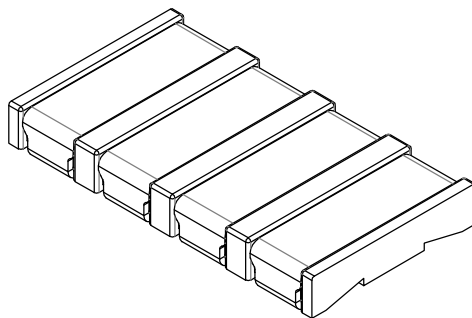


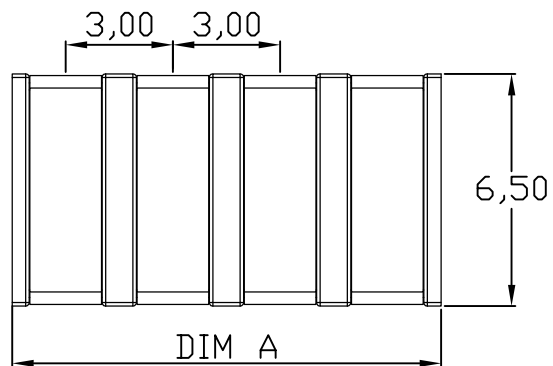

性能:

额定电流: 5.0A

额定电压: 30V

耐电压: 500V

接触电阻: 30mΩ MAX


绝缘电阻: 500MΩ

工作温度: -55℃~+125℃

使用寿命: 10000次以上

塑件(材质): LCP黑色


接触点(材质): 黄铜C2680, 接触面镀金3U"

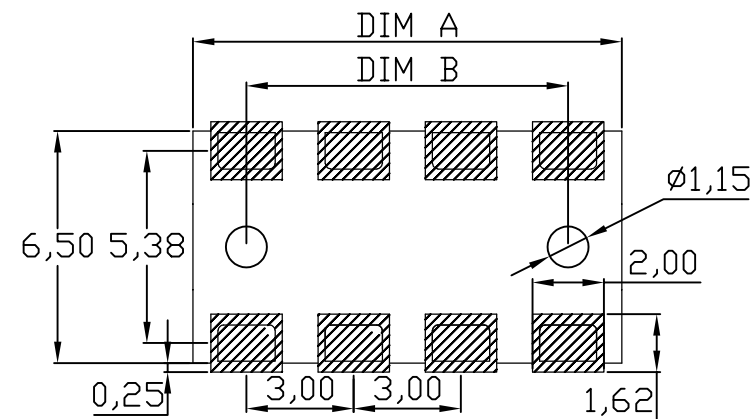

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)

规格型号	DIM A	DIM B
XB-BC-62-2PD160	6.0	3.0
XB-BC-62-3PD160	9.0	6.0
XB-BC-62-4PD160	12.0	9.0
XB-BC-62-5PD160	15.0	12.0
XB-BC-62-6PD160	18.0	15.0
XB-BC-62-7PD160	21.0	18.0
XB-BC-62-8PD160	24.0	21.0

版本REV.	更新标记REVISION	NOTE	日期DATE	未注公差 TOLERANCE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
				X. ± 0.35	
				X. X ± 0.25	
				X. XX ± 0.15	
绘制DRAWN					品名ARTICLE: 电池连接器
设计DES' D		付坚强		X. XXX ± 0.05	
		视图方法 PROJECTION			
审核CHK' D		叶泽奇			图号MODEL: XB-BC-62系列母座
批准APPV' D		彭继华		比例SCALE:	
				单位UNIT: mm	页码SHEET: 共1页 第1页