

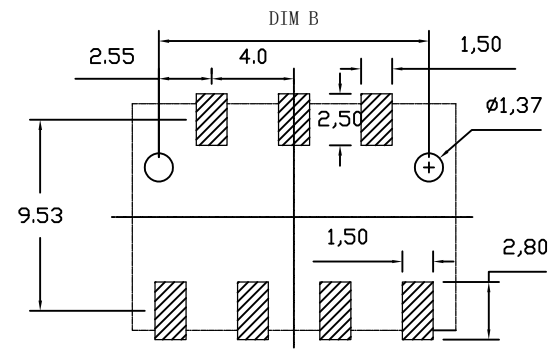
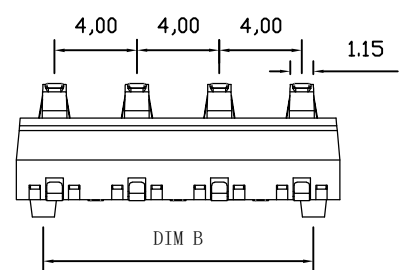
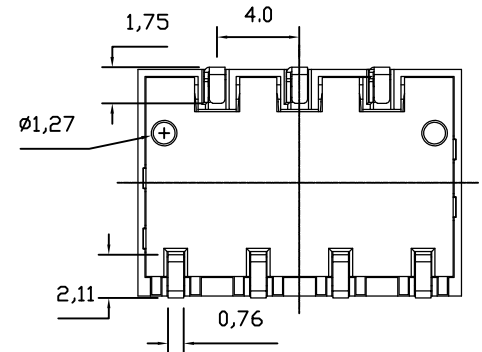
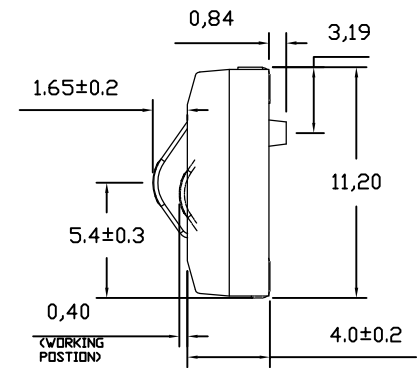


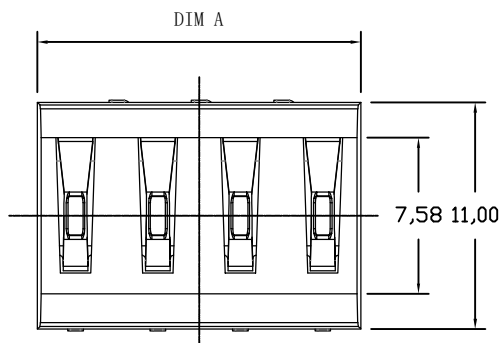


RECOMMENDED PCB LAYOUT
TOL:(±0.05)

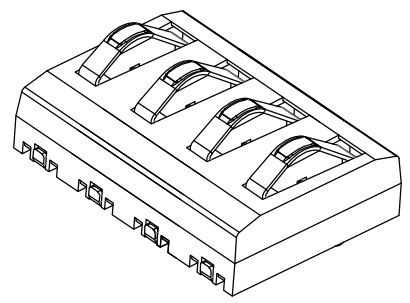

性能:

- 额定电流: 3A
- 额定电压: 30V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -55℃~+125℃
- 塑件(材质): PA9T
- 接触点(材质): 磷铜, 镀金5U
- 包装载带: PET透明

Pin数	PART NO.	DIM A	DIM B
2P	XB-BC-70-2PD400-5U	7.7	5.11
3P	XB-BC-70-3PD400-5U	11.7	9.11
4P	XB-BC-70-4PD400-5U	15.7	13.11
5P	XB-BC-70-5PD400-5U	19.7	17.11
6P	XB-BC-70-6PD400-5U	23.7	21.11

版本REV. 2017050522	日期DATE 2017.05.05	未注公差 TOLERANCE X. ±0.35 X." ±4" X. ±0.25 X.X" ±3"	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
绘制DRAWN KevinMao		X.XX ±0.15 X.XX ±2" X.XXX ±0.05 X.XXX ±1"		品名ARTICLE: 电池连接器
设计DES'D KevinMao		视图方法 PROJECTION 		图号MODEL: XB-BC-70-NPD
审核CHK'D EricPeng		比例SCALE:		A4
批准APPV'D		单位UNIT: mm	页码SHEET: 共1页 第1页	