



REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名











ELECTRICAL CHARACTERISTICS

1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 250±50gf

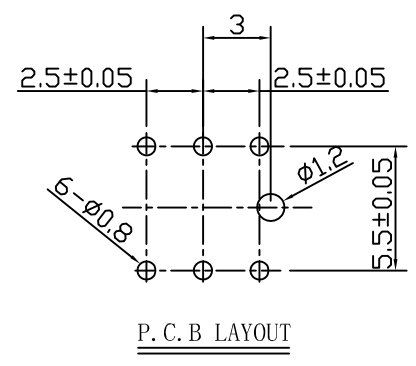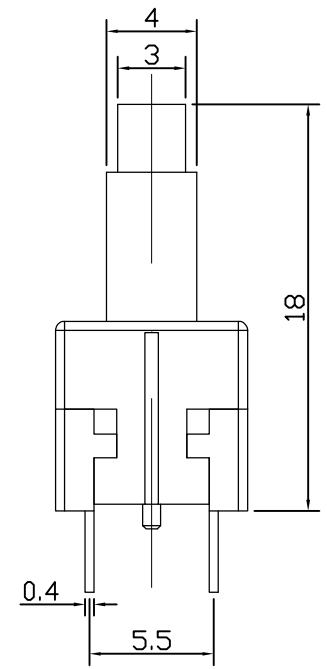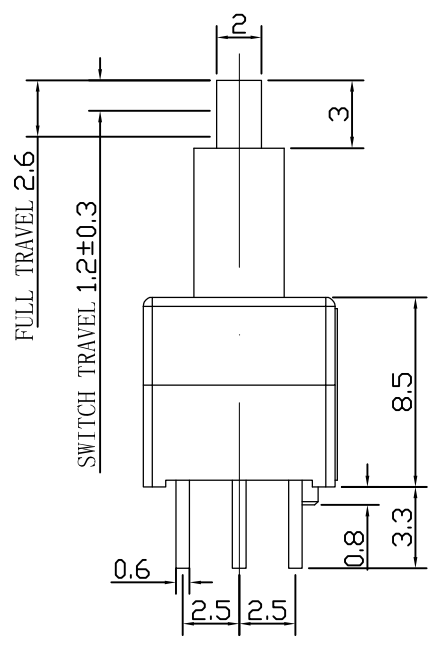

6	TERMINAL	BRASS STRIP	6	Ag PLATED
5	CASE	PA66	1	BLACK
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PA66	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

GENERAL TOLERANCE 未指的公差		TITLE 名称			
X. ± 0.5	X.° ± 5°	XB-8585-180D			
.X ± 0.3	.X° ± 2°				
.XX ± 0.2	.XX° ± 1°				
.XXX ± 0.1	.XXX° ± 0.5°				
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)	SCALE 比例	PROJ. 图例
				1:1	REV.