
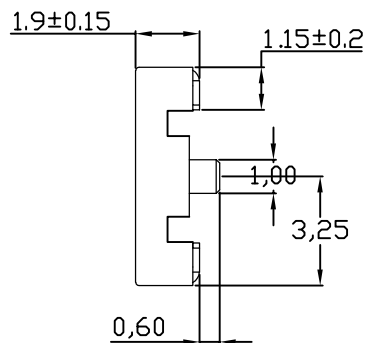
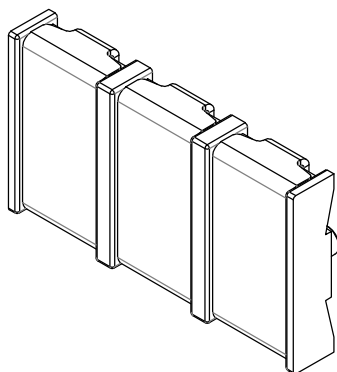
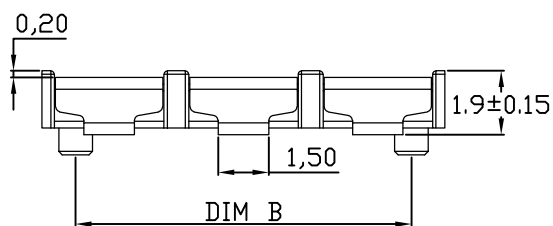


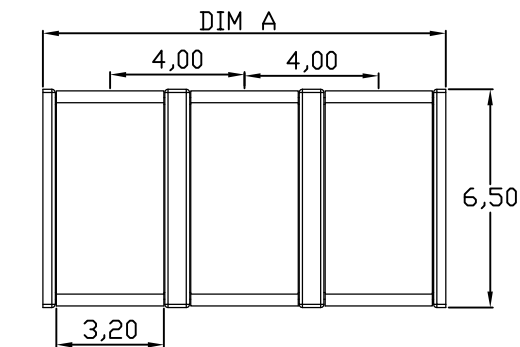

性能:

额定电流: 5.0A

额定电压: 30V

耐电压: 500V

接触电阻: 30mΩ


绝缘电阻: 500MΩ

工作温度: -55℃~+125℃

使用寿命: 10000次以上

塑件(材质): LCP黑色


接触点(材质): 黄铜C2680, 镀金

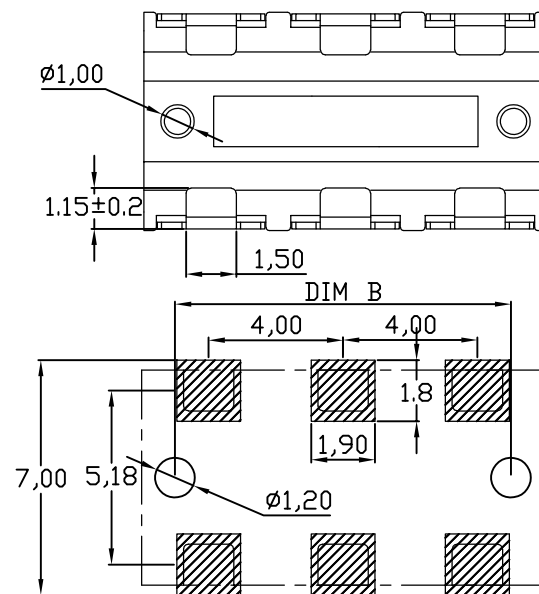

RECOMMENDED PCB LAYOUT

TOP VIEW (.XX±0.05)

规格	DIM A	DIM B
XB-BC-72-2PD190	8.0	6.0
XB-BC-72-3PD190	12.0	10.0
XB-BC-72-4PD190	16.0	14.0
XB-BC-72-5PD190	20.0	18.0
XB-BC-72-6PD190	24.0	22.0

版本REV.		更版标记REVISIONNOTE		日期DATE		未注公差 TOLERANCE		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
						X. ±0.35 X. ° ±4°			
						X.X ±0.25 X.X ° ±2°			
绘制DRAWN		彭育春		X.XX ±0.15 X.XX ±0.5°		品名ARTICLE: 电池连接器			
设计DES'D		付坚强		X.XXX ±0.05 X.XXX ±0.05°					
				视图方法 PROJECTION					
审核CHK'D		叶泽奇				图号MODEL:		XB-BC-72系列有柱 A4	
批准APPV'D		张志敬		比例SCALE:		单位UNIT: mm		页码SHEET: 共1页 第1页	