

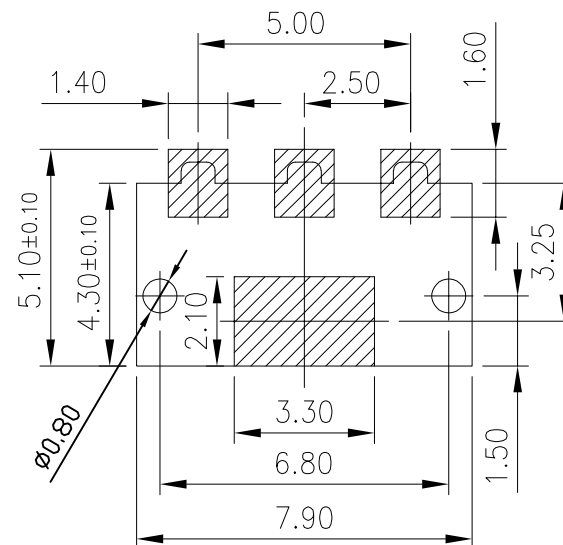
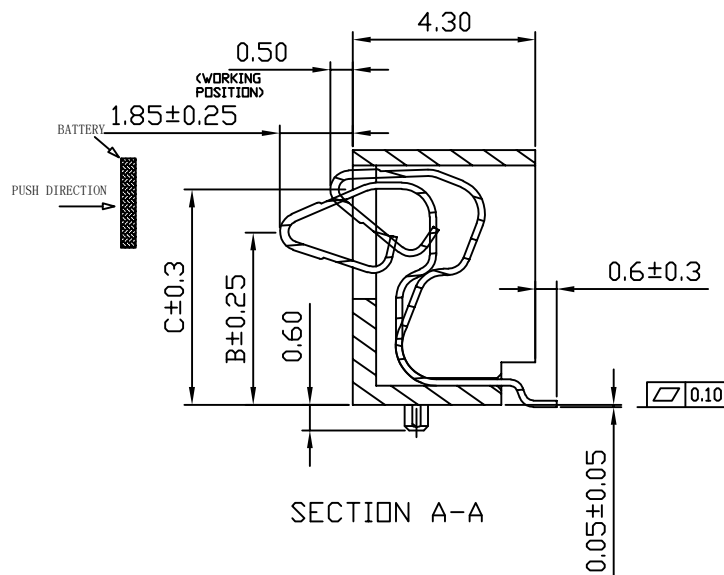


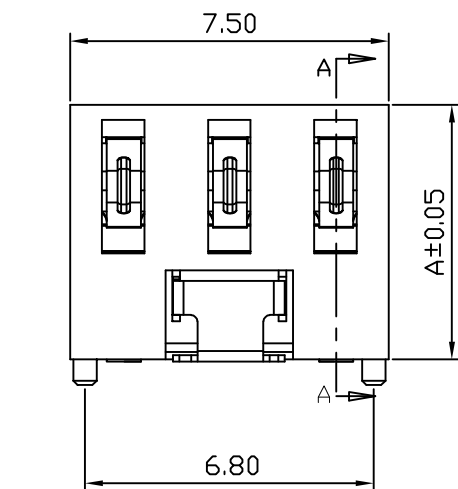

RECOMMENDED PCB LAYOUT
TOP VIEW(. XX±0.05)

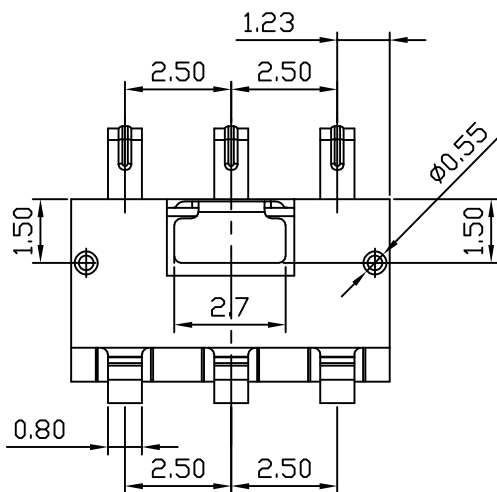

PART NO.	A	B	C
XB-BC-75-3PD540	5.4	3.8	4.6
XB-BC-75-3PD600	6.0	4.4	5.2
XB-BC-75-3PD650	6.5	4.9	5.7
XB-BC-75-3PD700	7.0	5.4	6.2
XB-BC-75-3PD750	7.5	5.9	6.7
XB-BC-75-3PD800	8.0	6.4	7.2

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V


接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金

版本REV.		更新标记REVISIONNOTE	日期DATE	未注公差 TOLERANCE		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LT		
				X. ±0.35	X. ° ±4°			
				X.X ±0.25	X.X ° ±3°			
绘制DRAWN		彭育春		X.XX ±0.15	X.XX ±2°	品名ARTTCL: 电池连接器		
设计DES'D		付坚强		X.XXX ±0.05	X.XXX ±1°			
				视图方法 PROJECTION				
审核CHK'D		叶泽奇				图号MODEL: XB-BC-75-3PD		
批准APPV'D		张志敬		比例SCALE:				
				单位UNIT: mm		页码SHEET: 共1页 第1页		