
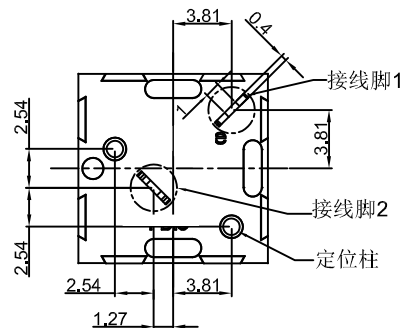




DONG GUAN XI BANG ELECTRONI CS CO., LTD.



SPECIFICATIONS:

Circuit: SPST

Current:rating: 0.5A 30VDC ;
0.25A 50VDC ;

Contact resistance: 50m Max. (Initial) ;

Insulation resistance: 100MΩ Min. ;

Insulation strength: 1000VAC for 1 minute ;

Operating force: 300±100gf ;
400±100gf ;

Total travel: 1.0±0.25mm ;

Electrical Life: 100,000 cycles Min. ;

Machine Life: 200,000 cycles Min. ;

Manual welding: 350℃ for 3 seconds;

Operating temperature: -25℃~+70℃ ;

Surroundings sumidity: 85%RH Max. ;

Function: Momentary


MATERIAL:

Frame:PA66+GF,UL rated:94V-2 Min. ;

Cap:ABS ;

Terminal:Brass,Silver plated ;

Dome: SST, Silver plated with single side.

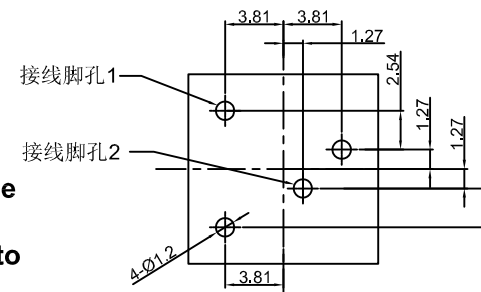

P.C.B.LAYOUT

W	White 白色
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
A	Gray 灰色
O	Orange 橘色
Cap Color(X) 上盖颜色(X)	

Note:

1.This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;

2.After the product is welded on the PCB board,it is prohibited to use any solvent to clean the PCB board,and avoid the influence of the inner product.

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT		mm.
A2	增加产品焊接说明	2016.09.22	N/A	视 角		比例尺	NONE	日 期	2016.09.22	品 名	TITLE		图 号
A1	基座材质更改为PA66+GF	2014.06.27	N/A	VIEWING ANGLE		SCALE		DATE			DRAWING NO		
A0	New Issue	2011.02.14	N/A	核 准	核 对	Sinc	绘 图	姜庆勇	TACT SWITCH		XB-TS-1202		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	Richard	CHECKED BY	DRAWN BY						