
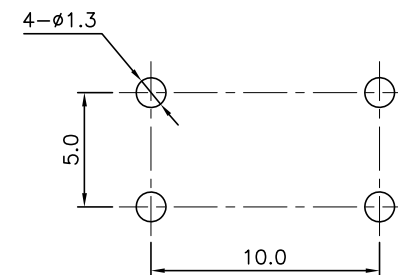
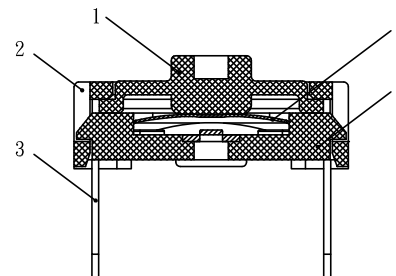
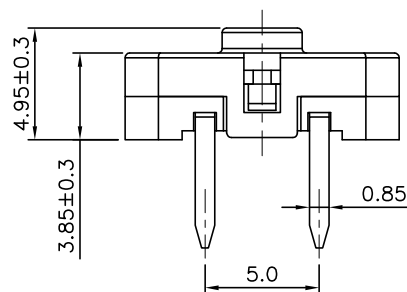
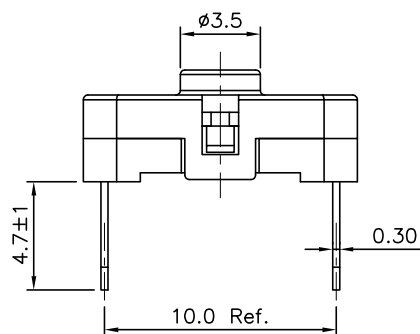
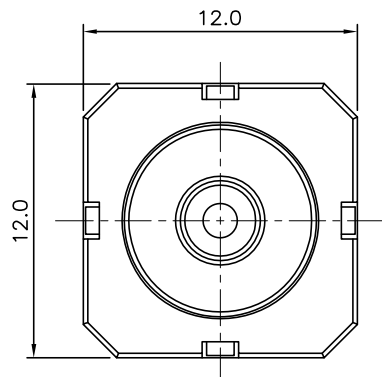




ABIDE BY ROHS

REV	DESCRIPTION	DRW	DATE
A/0	FIRST ISSUE	D X. Zhang	2016-04-27

- NOTES:
- 1.RATING: 12VDC 50mA.
 - 2.CONTACT RESISTANCE: 100mΩ Max.(Initial)
 - 3.INSULATION RESISTANCE: 100MΩ (at 500VDC)
 - 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MINUTE.
 - 5.OPERATING LIFE:1,000,000 CYCLES MIN.
 - 7.OPERATION FORCE:350±100gf.
 - 8.TRAVEL: 0.7±0.3mm.
 - 9.OPERATING TEMPERATURE: -20°C to 70°C.



P.C.B.LAYOUT

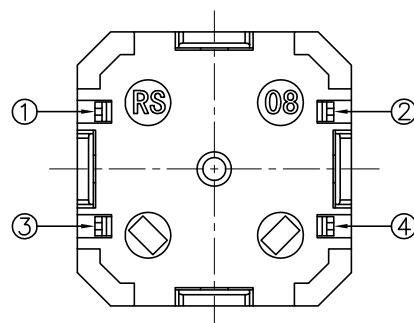

CIRCUIT

NO.	PART NAME	MATERIAL	QTY.	FINISHING
1	BUTTON	SILICONE RUBBER	1	WHITE
2	COVER	PA	1	BLACK
3	TERMINAL	H65 (C2680)	4	Ag PLATED
4	CONTACT	STAINLESS STEEL METAL	1	Ag PLATED
5	BASE	PA	1	BLACK

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE				DRAWN	DATE	TITLE	TACT SWITCH	
UNLESS OTHERWISE STATED				D X. Zhang	2016. 04. 27	MODEL	XB-TS-1211D	
X.X	±0.25	mm	±1°	CHK'D	DATE	MATL		
X.XX	±0.15	UNIT	mm	XZ. Ou	2016. 04. 27	FINISH		
REV.	A/0	SCALE	3:1	APPV'D	DATE			
SIZE	A4	SHEET	1 OF 1	SZ. Yang	2016. 04. 27			