

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0	———	NEW RELEASE	06/19'19	SKY	SKY	WZX

Specification

* Electrical Characteristics :

Current Rating:0.5A.

Withstanding Voltage:AC500V r.m.s.

Insulation Resistance:

1000Megohms Minimum at DC 500V.

Contact Resistance:100Miliohms Maximum.

*Mechanical Characteristics:

*Mating Cycles: 10000 Insertions.

Environmental :

*Operating Temperature:-40° C to +85° C.

Material:

1.Housing:HI-Temp plastic UL 94V-0 Rated.






2. Contact: Copper alloy, gold plated 3U"

3. Ground plate: Brass, tin plated 120U"


Can accord with management standards for

"environment-related substances to be controlled"

Meets RoHS and Halogen free.

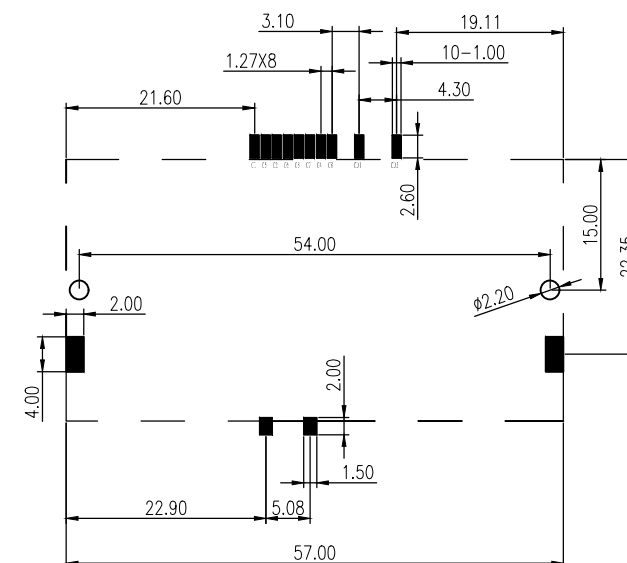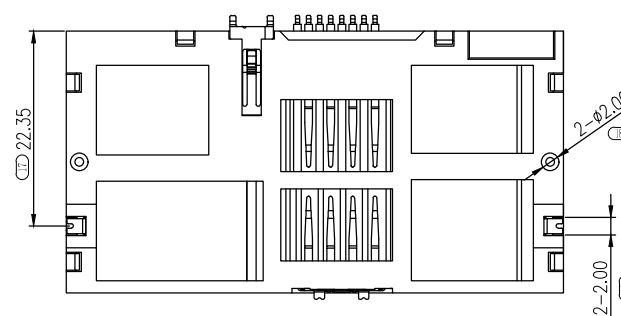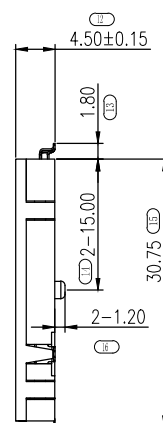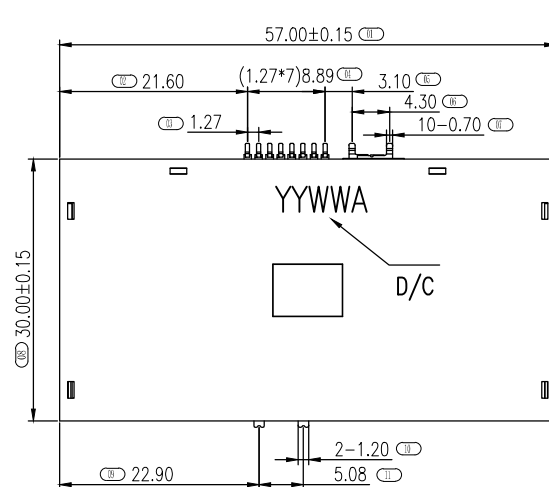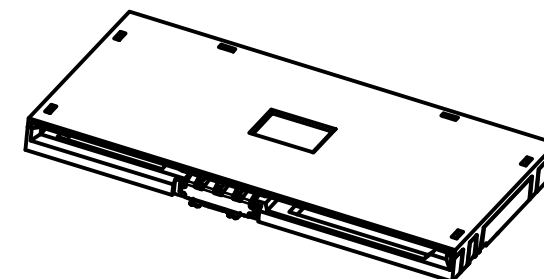

RECOMMENDED
PCB PATTERN LAYOUT
(GERNERAL TOLERANCE: ± 0.05)

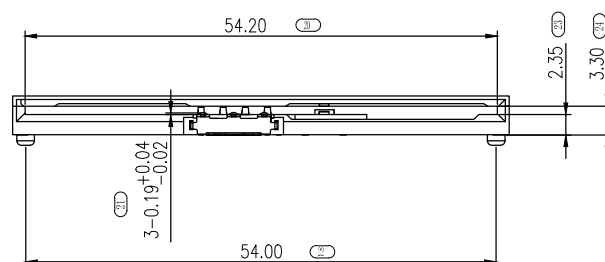

噴碼說明: Y Y M M A



每20K將尾數從A向后排，0-20K為A，20K-40K為B，以此類推，以滿足生產追溯。


— 周:01表示第一周

• • • • •

12表示第十二周


—17: 2017年

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.									
X° ± 2'	X° ± 2'	MAT'L										
.X ± 0.30	.XX ± 0.012	SEE NOTES	PART NUMBER:		TITLE:							
.XX ± 0.20	.XXX ± 0.008	FINISH	XB-102033182		Smart Card							
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	APPD:		DWG NO.:							
		QTY	CHKD:		C-102033182-00							
		SEE NOTES	DR:			<table><tr><th>SCALE</th><th>SHEET</th><th>REV.</th></tr><tr><td>1:1</td><td>1/2</td><td>AO</td></tr></table>	SCALE	SHEET	REV.	1:1	1/2	AO
SCALE	SHEET	REV.										
1:1	1/2	AO										

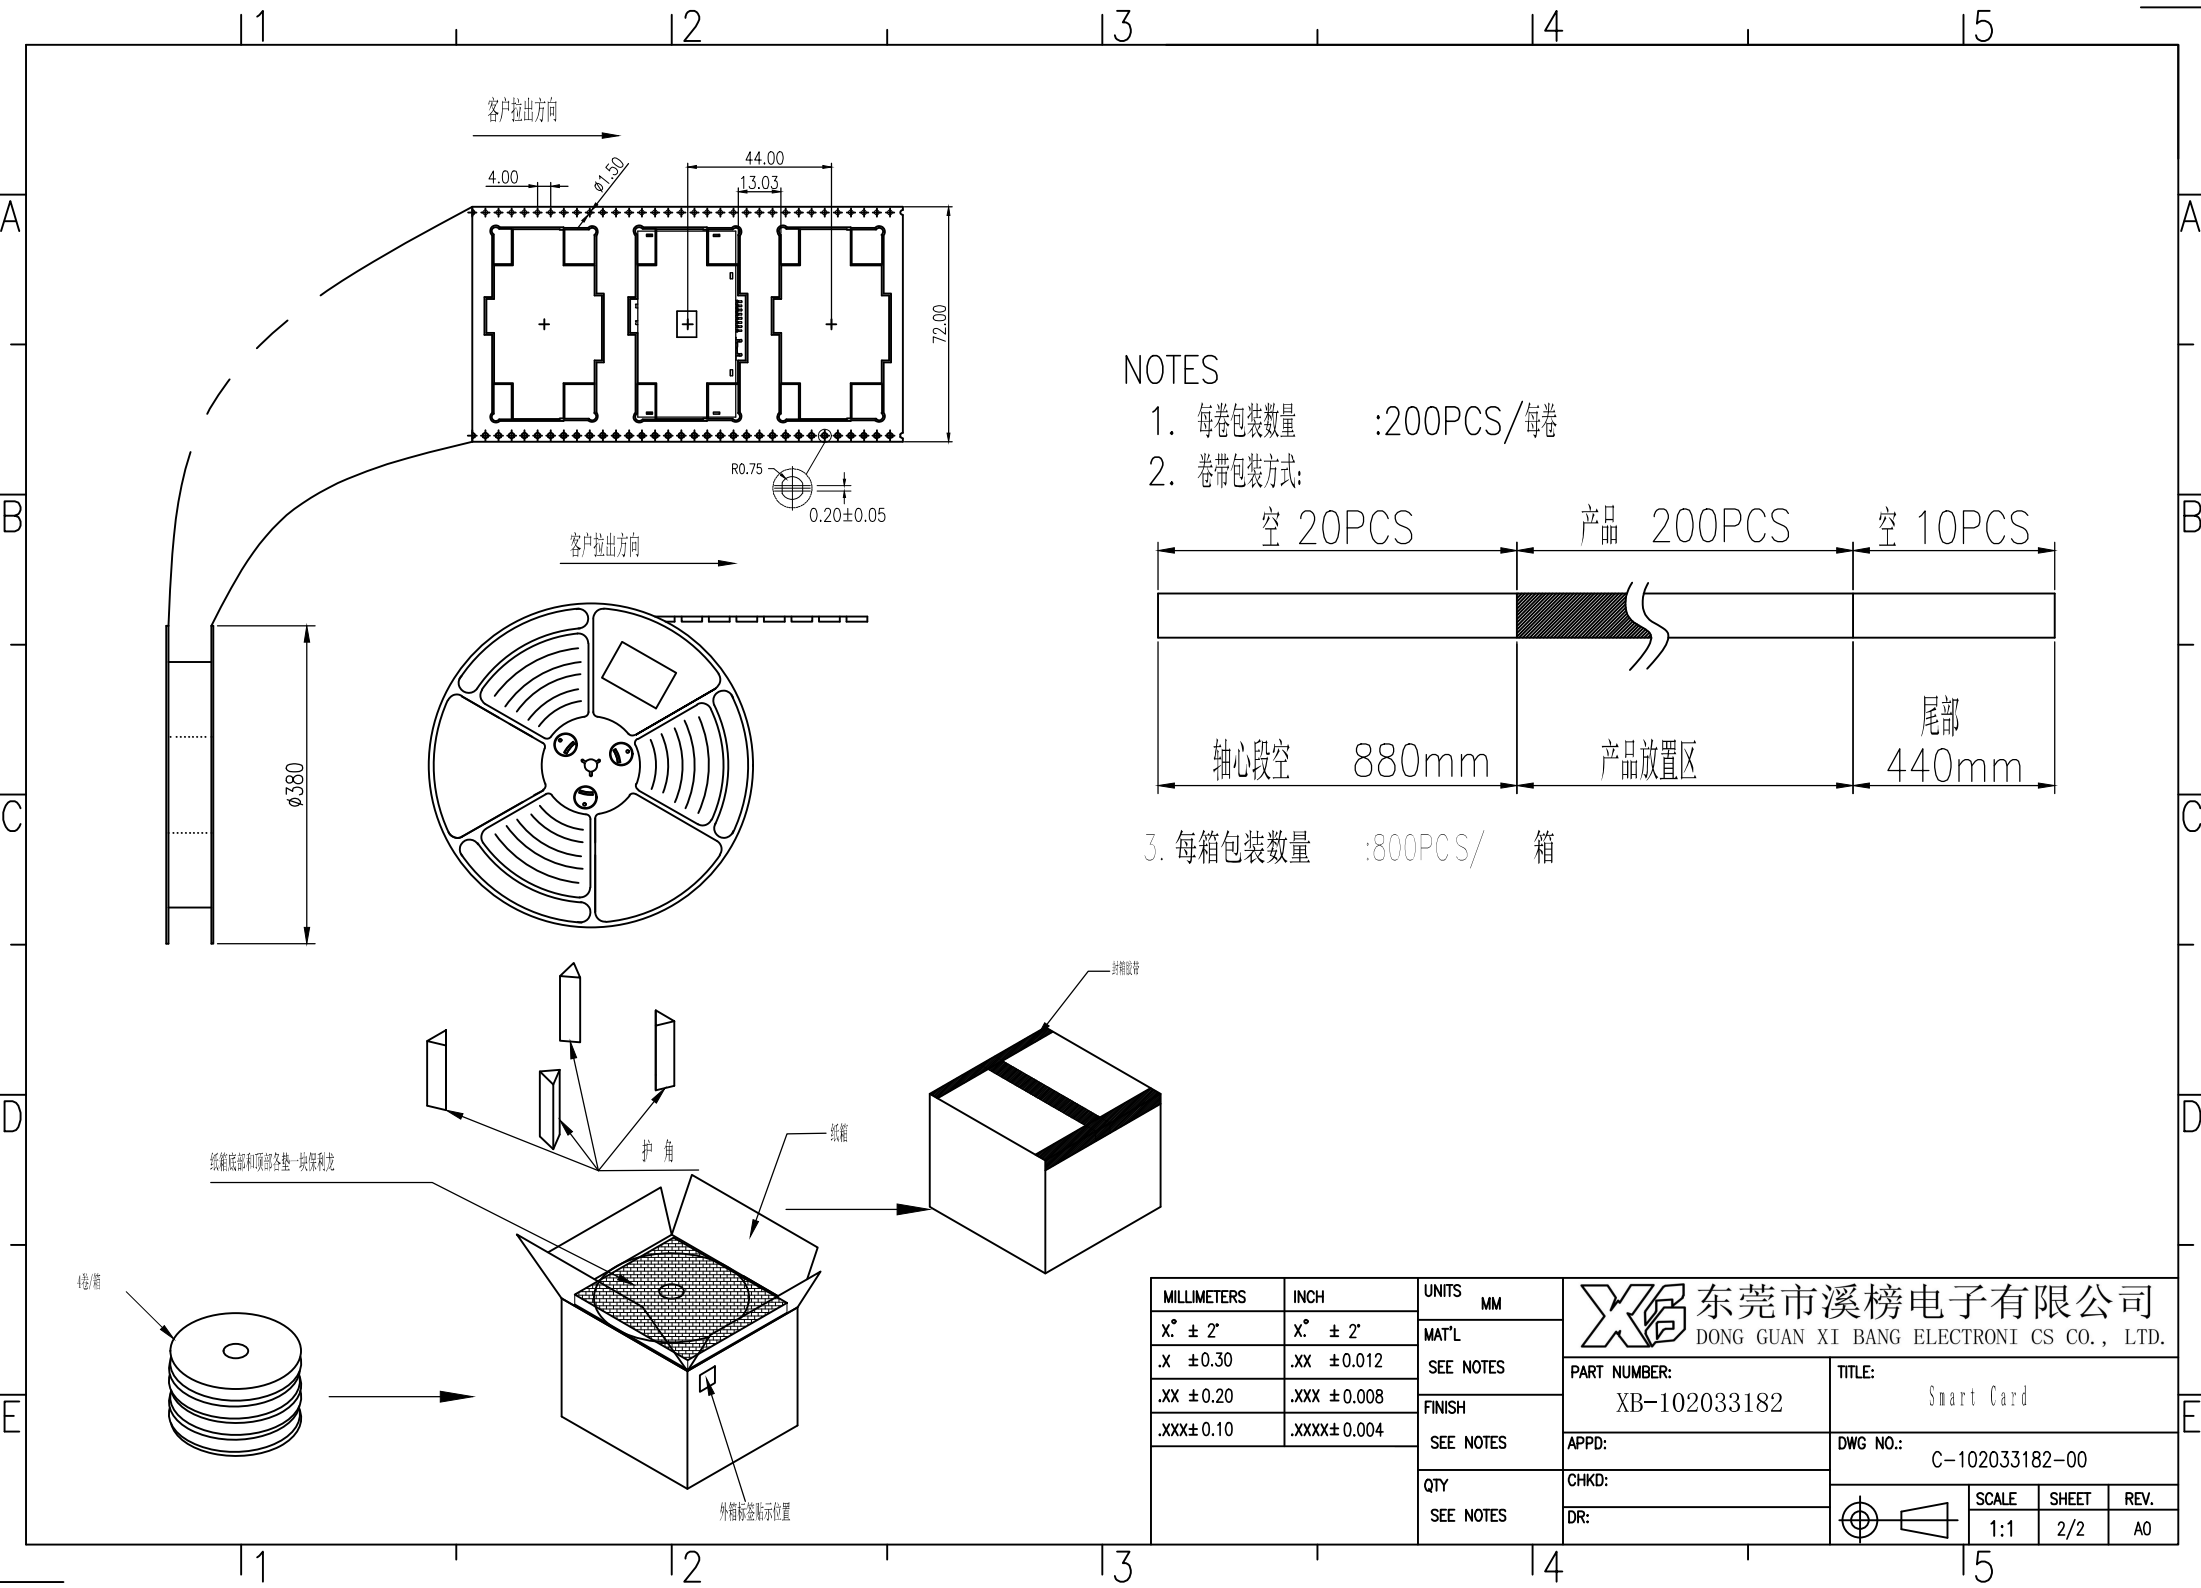

NOTES

- 每卷包装数量 : 200PCS/每卷
- 卷带包装方式:

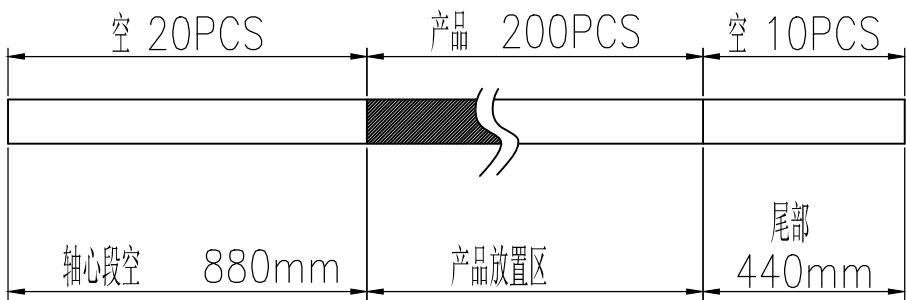

- 每箱包装数量 : 800PCS/箱

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L	SEE NOTES	PART NUMBER:	TITLE:		
.X ± 0.30	.XX ± 0.012	FINISH	SEE NOTES	XB-102033182	Smart Card		
.XX ± 0.20	.XXX ± 0.008	QTY	SEE NOTES	APPD:	DWG NO.:		
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	DR:	CHKD:	C-102033182-00		
				DR:	SCALE	SHEET	REV.
					1:1	2/2	A0