

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'16	HUANGTAO		YZZ

NOTES:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CONTACT RESISTANCE: 60 Milliohms Max
- 1-2. INSULATION RESISTANCE: 1,000 Megohms Min.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS




- 2-1. OPERATION TEMPERATURE RANGE: $-25^{\circ}\text{C}\sim+70^{\circ}\text{C}$
- 2-2. DURABILITY: 5000 CYCLES

3. MATERIAL:


- 3-1. HOUSING: LCP UL94V-0,BLACK
- 3-2. TERMINAL: PHOSPHOR BRONZE,T=0.15
- 3-3. SHELL: STAINLESS STEEL,T=0.15

4. FINISHED:

- 4-1. TERMINAL: Ni UNDERPLATED OVERALL,G/F PLATED ON CONTACT AREA AND SOLDER AREA

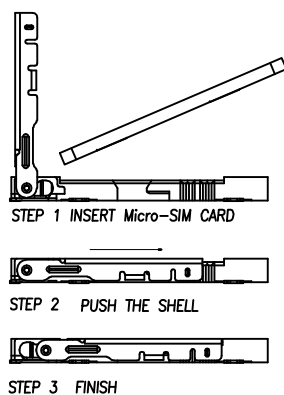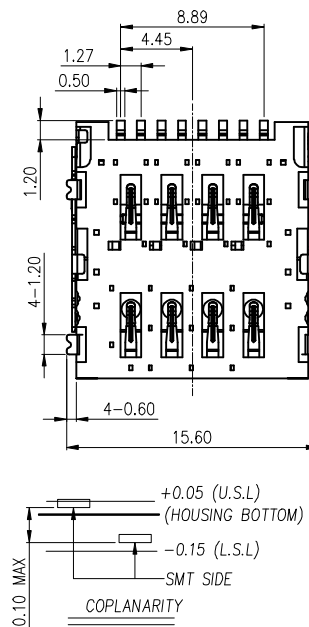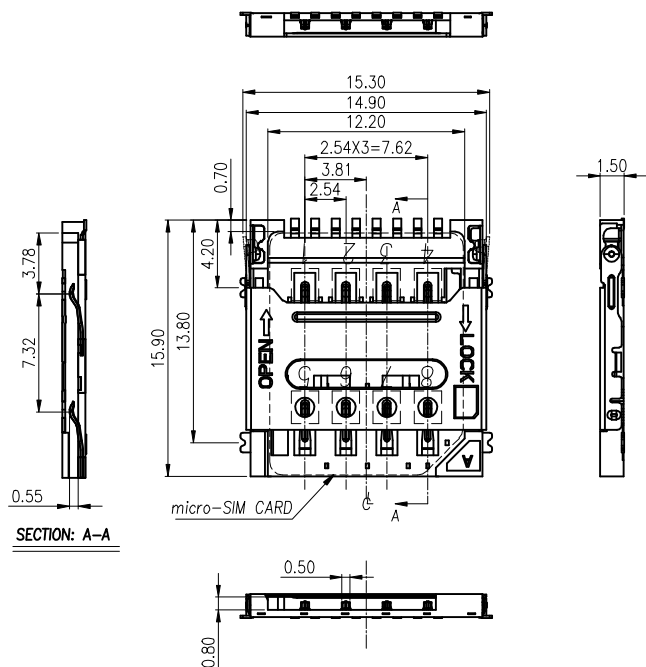


SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

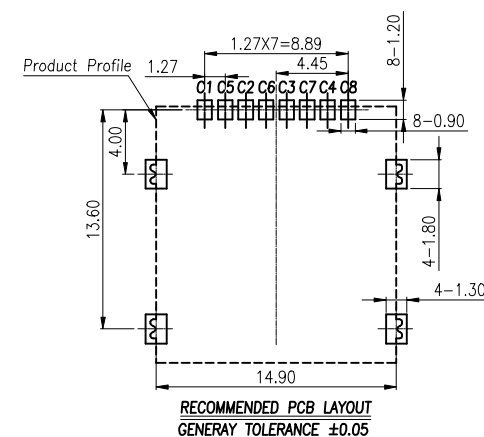

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X [°] ± 2'	X [°] ± 2'	MM	PART NUMBER:		TITLE:	
.X ± 0.38	.XX ± 0.012	MAT'L	XB-102313382		1.5H MICRO SIM 8PIN	
.XX ± 0.25	.XXX ± 0.008	SEE NOTES	APPD:		DWG NO.:	
.XXX ± 0.15	.XXXX ± 0.004	FINISH	CHKD:		C-102313382-00	
		SEE NOTES	QTY		SCALE	
		SEE NOTES	DR:		SHEET	
					REV.	
					1:1	
					1/2	
					A0	


RoHS

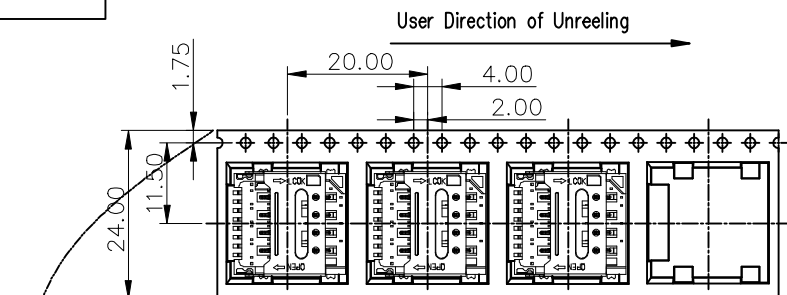



COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling

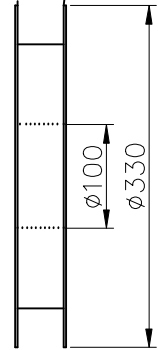


DETAIL B

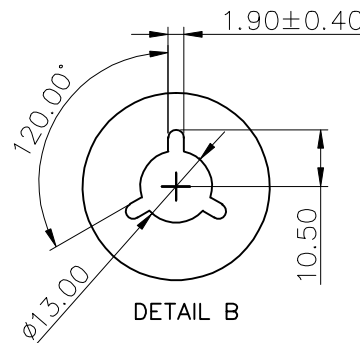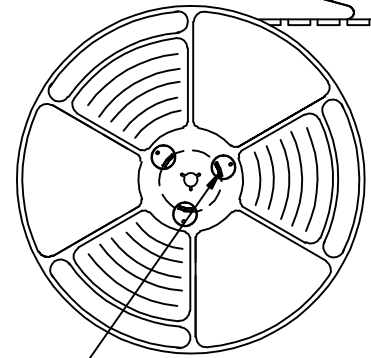

NOTES

1. NUMBER OF CONNECTORS: 1300PCS/REEL
2. LEAD TAPE LENGTH
EMPTY 10PCS MIN. PART 1300PCS 20PCS MIN. (300mm Min)
EMPTY COVER TAPE (300mm Min)
LEADER 400mm MIN. SUPPLIER TRAILER 160mm MIN.
3. QUANTITY: 13000 PCS/CARTON

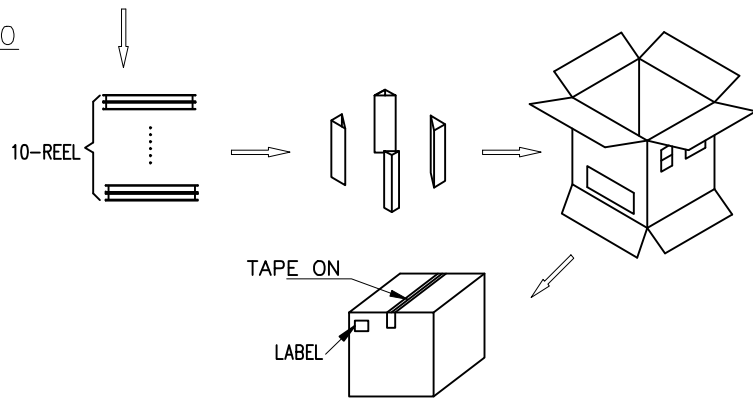

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
X" ± 2"	X" ± 2"	MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.30	.XX ± 0.012	MAT'L	PART NUMBER: XB-102313382			
.XX ± 0.20	.XXX ± 0.008	SEE NOTES	TITLE: 1.5H MICRO SIM 封装 8PIN			
.XXX ± 0.10	.XXXX ± 0.004	FINISH	APPD: DWG NO.: C-102313382-00			
SEE NOTES			CHKD: SCALE 1:1			
QTY			SHEET 2/2			
SEE NOTES			REV. A0			
			DR:			