





RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
X0		NEW RELEASE	05/18'18	TEDDY	TEDDY	HAIYONG
X1	ECN1809020	Remove the convex hull according to the object	09/17'18	TEDDY	TEDDY	HAIYONG

DATE CODE AREA

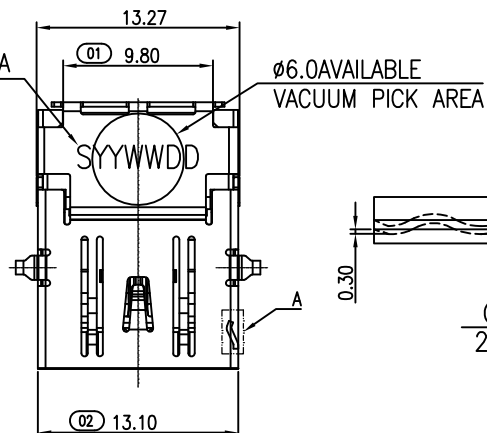

NOTES:

1. MATERIAL:

1.1 Housing:High Temperature Thermoplastic
UL94V-0; Color BLUE.

1.2 Terminal:Copper Alloy.

1.3 Shell:Stainless Steel.

2. SPECIALITY:

2.1 Rated current:1A

2.2 Rated voltage:30V

2.3 Contact Resistance:30mΩ MAX

2.4 Insulation Resistance:100MΩ MIN 500V DC

2.5 Dielectric withstanding voltage: 100V AC.

2.6 Solder ability:255±5℃, 5±0.5s.




2.7 Durability:5000 Cycles Min.

2.8 INITIAL:10N-22.06N

2.9 AFTER:8N-22.06N

3.0 Operating condition:Temperature-40℃~+85℃;
Humidity 80% R.H MAX

3. PLEASE CONTACT JITS SALES REPRESENTATIVE TO
VERIFY PRODUCT DETAILS & AVAILABILITY

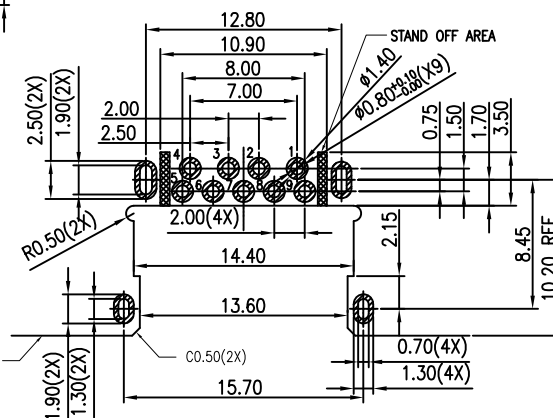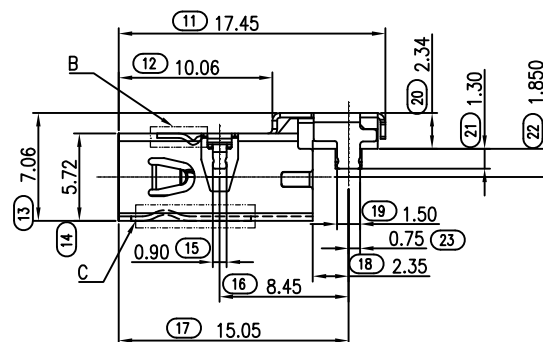

RECOMMENDED PCB LAYOUT (TOP VIEW)

GENERAL TOLERANCE ±0.05

PAD AREA

9	STDA_SSTX-	USB3.0
8	STDA_SSTX-	
7	GND	
6	STDA_SSRX-	USB2.0
5	STDA_SSRX-	
4	GND	
3	D+	
2	D-	
1	VBUS	
PIN NO	SIGNAL NAME	REMARK

3	Housing	1PC	High Temperature Thermoplastic	UL94V-0; Color blue(PANTONE300C)
2	Shell	1PC	Stainless Steel	Slider plating Ni:30u"min
1	Termiral	1PC	Copper Alloy.	Contact Au:1u"min plating ;slider MATTE TIN 100~160u",Ni:50u"min
NO	Description	Dosage	Material	Color/plating

MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.30	.XX ± 0.012	SEE NOTES	
.XX ± 0.20	.XXX ± 0.008	FINISH	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBilai Metal Plastic Technology Co.,Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBilai Metal Plastic Technology Co.,Ltd.			
QTY			
SEE NOTES			

XGB 东莞市溪榜电子有限公司		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER:		TITLE:	
104010092		USB 3.0 SINKING 1.85 DIP 客户图	
APPD:		DWG NO.:	
XB-104010092			
CHKD:			
DR:			
		SCALE	SHEET
		1:1	1/2
		REV.	X0

RoHS

A

B

C

D

E


A

B

C


D

E


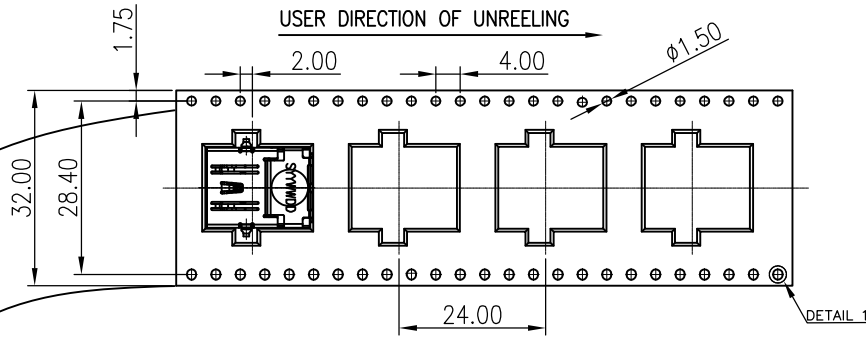


NOTES


1. NUMBER OF CONNECTORS: 370PCS/REEL
2. LEAD TAPE LENGTH

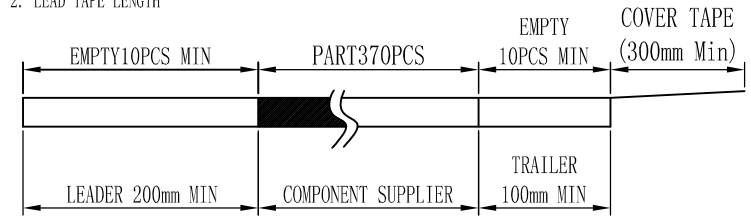



3. QUANTITY: 3330PCS/CARTON

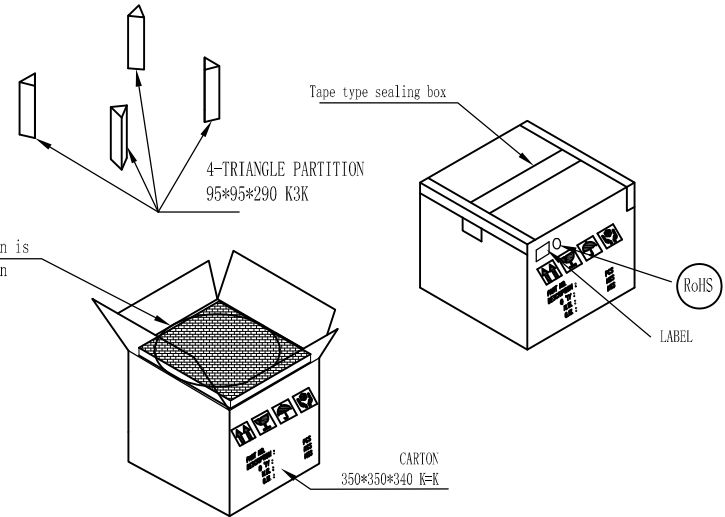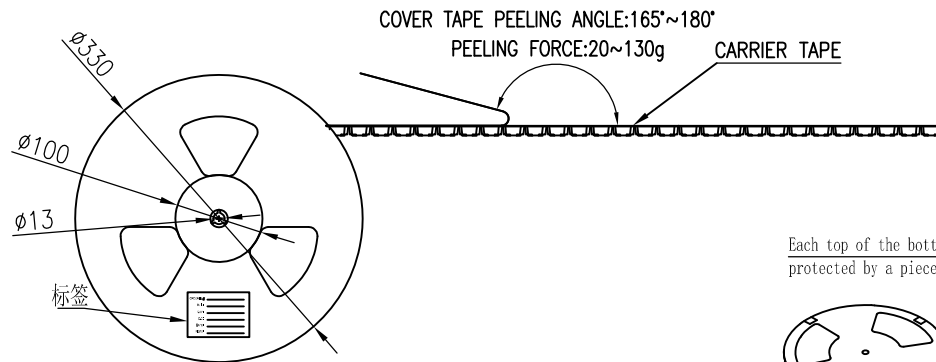


Each top of the bottom of the carton is protected by a piece of pearl cotton



9 rolls per carton

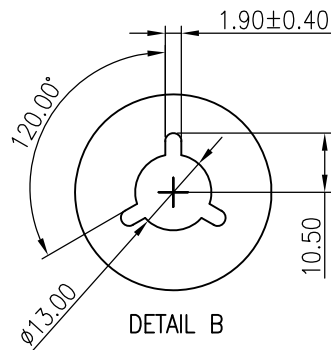

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司					
		MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.					
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER:		TITLE:			
.X ± 0.30	.XX ± 0.012	SEE NOTES	104010092		USB 3.0 SINKING 1.85 DIP客户图			
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD:		DWG NO.:			
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	CHKD:		XB-104010092			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Dongguan JinBilai Metal Plastic Technology Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Dongguan JinBilai Metal Plastic Technology Co.,Ltd		QTY	DR:			SCALE	SHEET	REV.
		SEE NOTES				1:1	2/2	X0