
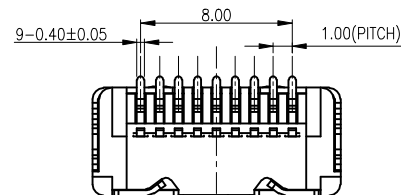
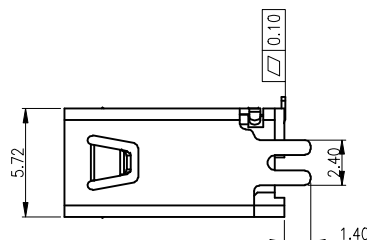
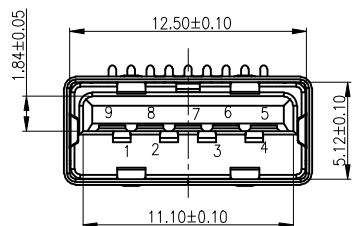


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'16	HUANGTAO		HAIYONG




SPECIFICATIONS:

- 1.CURRENT RATING:1.0A AT 30V AC.
- 2.WITHSTANDING VOLTAGE:100V AC FOR ONE MINUTE.
- 3.INSULATION RESISTANCE:100MΩ MIN.
- 4.CONTACT RESISTANCE:30MΩ MAX.
- 5.MATING FORCE:3.57KGF MAX.
- 6.UNMATING FORCE:1.02KGF MIN.
- 7.OPERATING TEMPERATURE:-25°C~+85°C.

PART No.:

104010251
USB SERIES
PLATING: 01:G/F+MATTE TIN
PAKING: 1: TRAY
SERIAL NO.

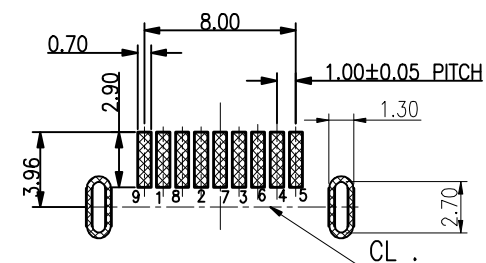

P.C.B LAYOUT T=1.20mm TOL:±0.05


4	5P端子	C5191	——	CONTACT AREA:G/F,SOLDER AREA:80u" MATTE TIN,UNDERPLATED:30u" Ni
3	4P端子	C5191	——	CONTACT AREA:G/F,SOLDER AREA:80u" MATTE TIN,UNDERPLATED:30u" Ni
2	主体	LCP	BLUE	UL 94V-0
1	外壳	SUS304	——	Ni 50u" MIN. SALT SPRAY:48H
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
X' ± 2'	X' ± 2'	MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.30	.XX ± 0.012	MAT'L				
.XX ± 0.20	.XXX ± 0.008	SEE NOTES				
.XXX ± 0.10	.XXXX ± 0.004	FINISH				
		SEE NOTES				
		QTY				
		SEE NOTES				
			PART NUMBER:		TITLE:	
			XB-104010251		USB3.0 11.6P立式SMT(无背边)	
			APPD:		DWG NO.:	
			CHKD:		C-104010251-00	
			DR:			
					SCALE	SHEET
					1:1	1/2
					REV.	A0

RoHS


一:

- 1) 将成品一一放入包装盘内, 依同一方向放入.
- 2) 包装时, 依图所示.
- 3) 一个吸塑盘放置100个成品.
- 4) 依次往上叠放15盘, 产品方向保持一致, 上盖放一个托盘, 用PE膜将托盘两边缠绕(PE膜距托盘边约50mm) 再在托盘中间缠绕成#字形为一扎, (缠绕3~5圈. 用力要适当)



USB A母直立式产品

装盘

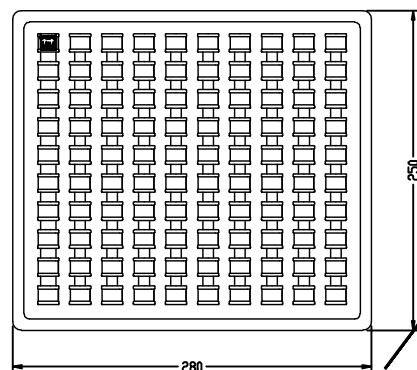


产品	立式 SMT	3000
透明胶	W-47	若干
PE膜	W-66	若干
托盘	280*250*10.5	32
纸箱	300*280*280	1
品名	规格(mm)	用量(PCS)

二:


- 1) 将2扎托盘放入纸箱中.
- 2) 每箱装3000PCS成品

保鲜膜



1扎叠16个托盘, 1500PCS成品

2扎叠装入纸箱



纸箱

三:

- 1) 用透明胶将纸箱封实.
- 2) 将标签(按要求打印好的)贴在纸箱侧麦上方.

标签粘贴处

ITEM NO:
Q'TY: PCS
N.W: KGS
G.W: KGS
MEAS: 30X26X26CM

C/NO:
MADE IN CHINA

- 1) 装不满一个外箱的, 用填充物填满未装空间或将纸箱割小至刚好装下.
- 2) 在搬运过程中要轻拿轻放.
- 3) 在运输中不可堆放过多, 不可有重压现象.

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
X" ± 2"	X" ± 2"	MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.30	.XX ± 0.012	MAT'L	PART NUMBER: XB-104010251			
.XX ± 0.20	.XXX ± 0.008	SEE NOTES	TITLE: USB3.0AF 11.6H立式SMT(无脊边)			
.XXX ± 0.10	.XXXX ± 0.004	FINISH	APPD: DWG NO.: C-104010251-00			
		SEE NOTES	CHKD: SCALE SHEET REV.			
		QTY	1:1 2/2 A0			
		SEE NOTES	DR: 1:1 2/2 A0			