
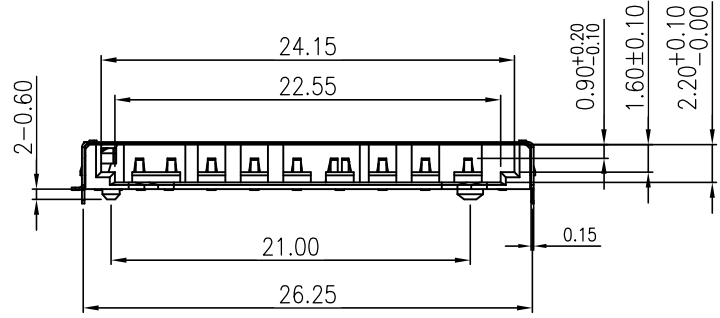
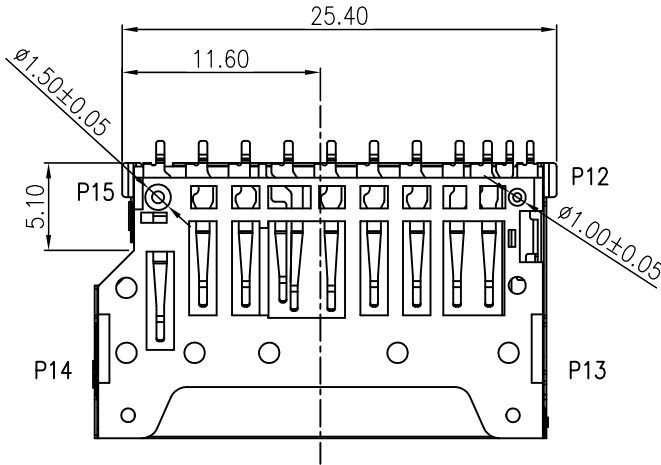
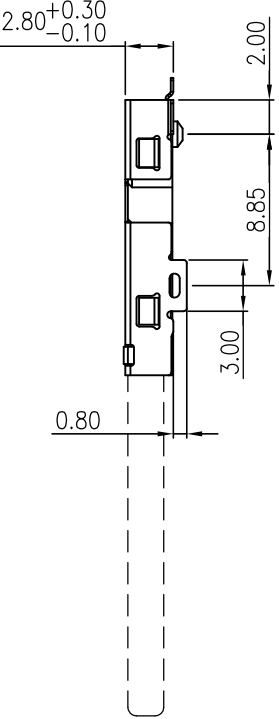



RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		正式发行	2018.10.31	HFL	WZX	YONG

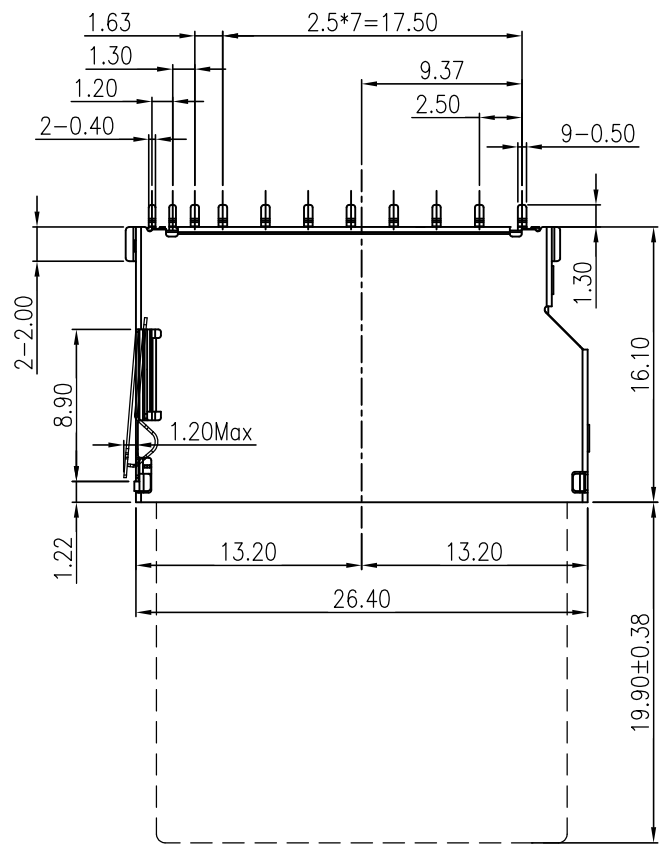

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司					
X° ± 2°	X° ± 2°	MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.					
.X ± 0.38	.XX ± 0.015	MAT'L	PART NUMBER:		TITLE:			
.XX ± 0.25	.XXX ± 0.010	SEE NOTES	XB-102012672		SD短体前贴后插H2.80客户图			
.XXX± 0.10	.XXXX± 0.004	FINISH	APPD:		DWG NO.:			
		SEE NOTES	CHKD:		C-102012672-00			
		QTY	DR:			SCALE	SHEET	REV.
		SEE NOTES				1:1	1/3	A0

RoHS

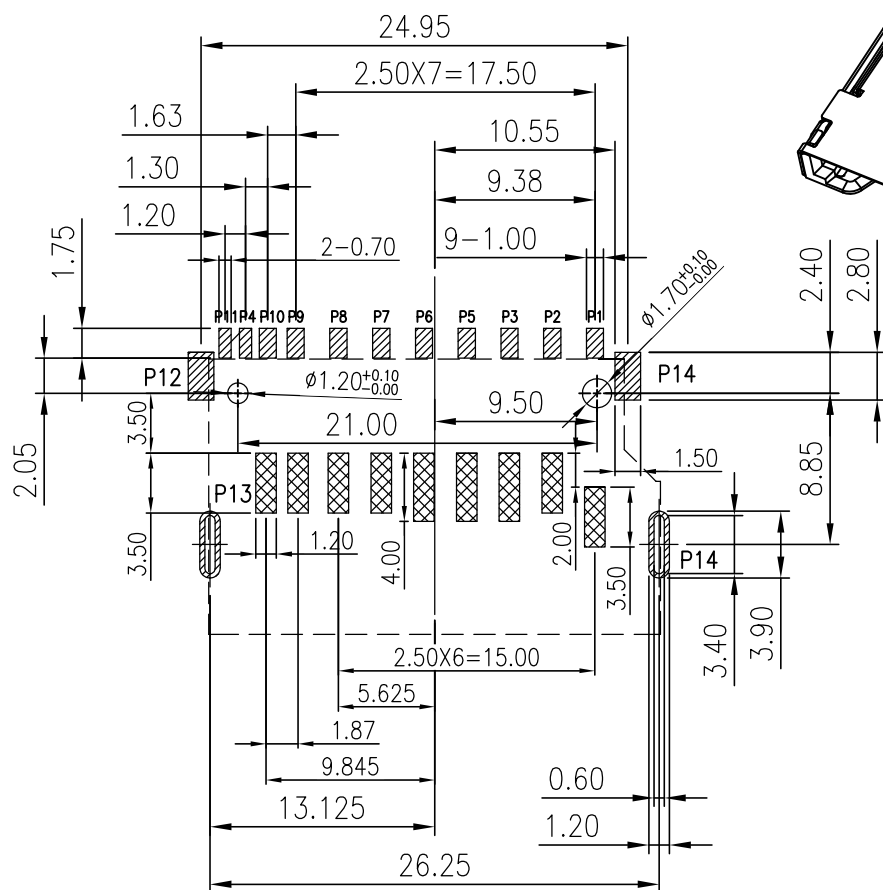

PAD



No trace , no test point,
no via hole, no ground area

WITHOUT CARD		CARD INSERTED:LOCK		CARD INSERTED:UNLOCK	
W/P	GND	W/P	GND	W/P	GND
C/D	VSS1	C/D	VSS1	C/D	VSS1

Pin Define

Connector Pin No.	SD Card Pin No.	Pin Define
P1	P9	DAT2
P2	P1	DAT3
P3	P2	CMD
P4		CD
P5	P3	VSS1
P6	P4	VDD
P7	P5	CLK
P8	P6	VSS2
P9	P7	DAT0
P10	P8	DAT1
P11		W/P
P12~P15		GND

Specification

*Electrical Characteristics:

Contact Current Rating:0.5 Amperes.
Dielectric Withstanding Voltage:AC500V r.m.s.
Insulation Resistance:1000 MΩ Minimum.
Contact Resistance:100 mΩ Maximum.

*Environmental:

Operating Temperature:−20°C~+85°C.

*Environmental:

Mating Cycles:10,000

*Mechanical Characteristics:

Contact Insertion Force:1.00kgf Maximum.
Contact Separation Force:0.15kgf Minimum.

*Material:

Insulator:HI-Temp Plastic UL 94V−O Black
Contact:Copper Alloy(t=0.15mm).
Shell:Stainless Steel(t=0.15mm).


*FINISH:

CONTACT: 1u" min.GOLD PLATED ON CONTACT AREA
80u" min.TIN(MATTE) PLATING ON
SOLDER TAIL AREA
50u" min.NICKEL UNDERPLATING OVERALL
SHELL :80u" min. NICKEL PLATING OVERALL


MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
X° ± 2°	X° ± 2°	MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.38	.XX ± 0.015	MAT'L	PART NUMBER:		TITLE:	
.XX ± 0.25	.XXX ± 0.010	SEE NOTES	XB-102012672		SD短体前贴后插H2.80客户图	
.XXX± 0.10	.XXXX± 0.004	FINISH	APPD:		DWG NO.:	
		SEE NOTES	CHKD:		C-102012672-00	
		QTY	DR:			
		SEE NOTES				

RoHS


客户拉出方向

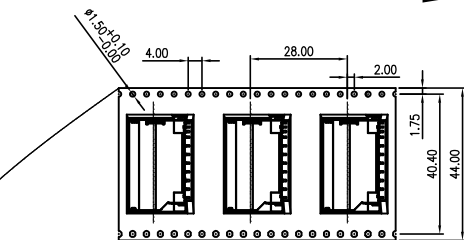


客户拉出方向

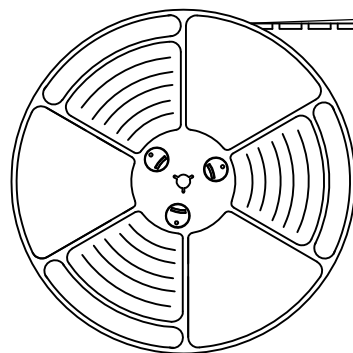

PE袋




纸箱底部和顶部各垫一块珍珠棉

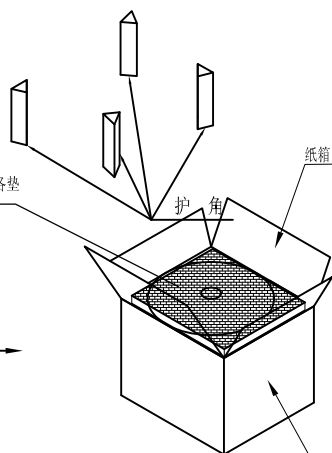


将6卷产品放入箱内

NOTES

- 1.每卷包装数量:450PCS/每卷
- 2.卷带包装方式:

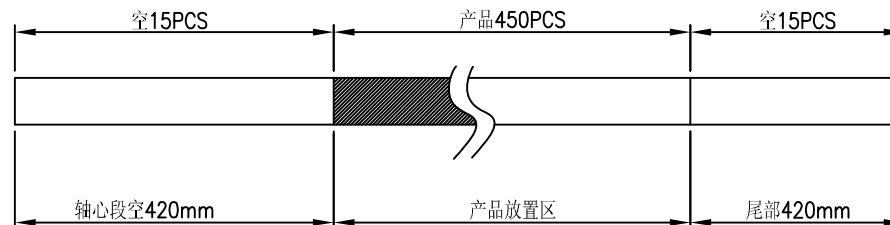


- 3.每箱包装数量:2700PCS/箱

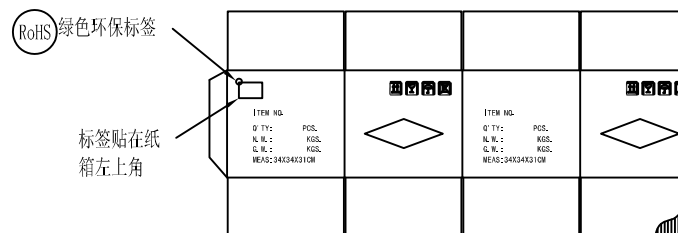

纸箱示意图

封箱胶带“工”字形封好



绿色环保标签

产品标签贴在纸箱左上角

RoHS

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER:		TITLE:	
.X ± 0.38	.XX ± 0.015	SEE NOTES		XB-102012672		SD短体前贴后插H2.80客户图	
.XX ± 0.25	.XXX ± 0.010	FINISH		APPD:		DWG NO.:	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:		C-102012672-00	
		QTY		DR:			
		SEE NOTES					