
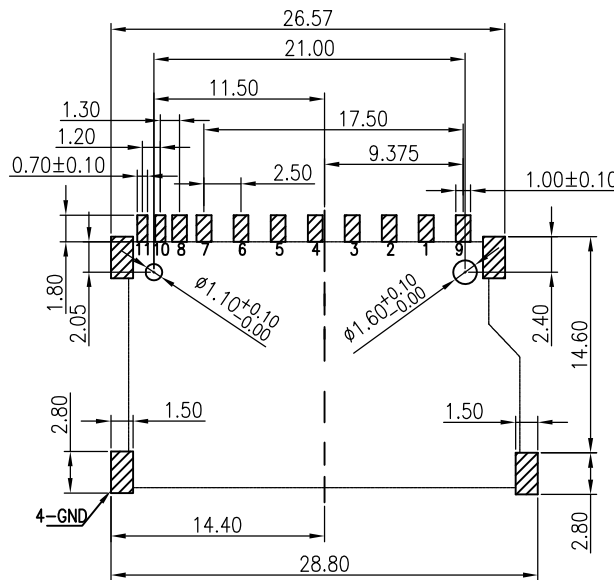


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A1	ECN1703011	增加ROHS标示及整理图面	20170324	PENG	WEI	LUO
A2	ECN1705012	增加黑色款	20170523	PENG	WEI	LUO

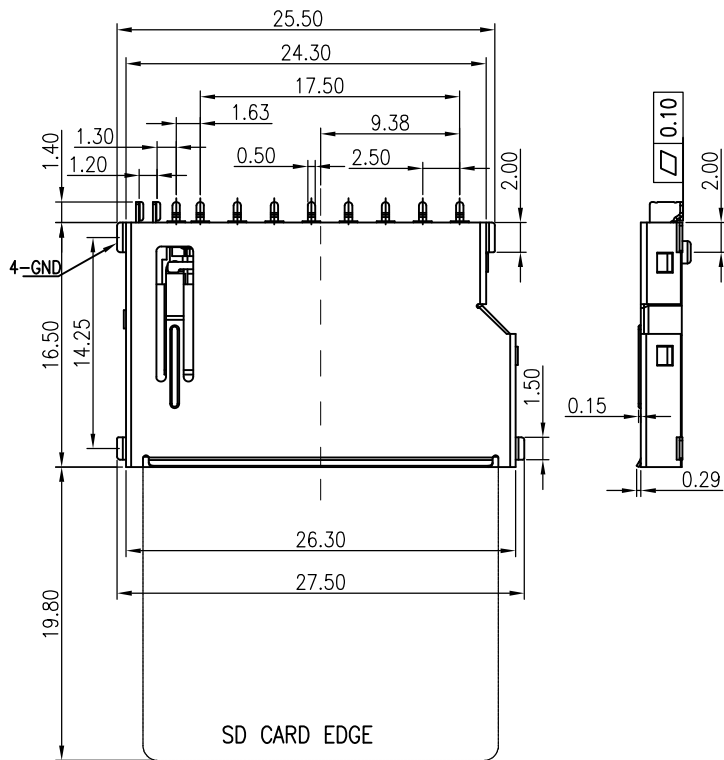

RECOMMENDED P.C.B LAYOUT
(TOLERANCE: +/-0.05)

NOTES:

1.MATERIAL

HOUSING : HIGH TEMPERATURE THERMOPLASTIC.
CONTACT: COPPER ALLOY
SHELL: COPPER ALLOY

2.PLATING

CONTACT AREA: GOLD PLATED OVER Ni
SOLDER TAIL: 50~100u" MIN Sn PLATED OVER Ni
SHELL SOLDER AREA: NICKEL PLATED



3.RATING

CURRENT RATING: 0.5A
VOLTAGE RATING: 250VRMS
OPERATING TEMPERATURE: -25°C~90°C

4.SPECIFICATION

CONTACT RESISTANCE: 100 M OHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC 1Min.
INSULATION RESISTANCE: 1000 MegOHMS MIN
INSERTION FORCE: 40N MAX
SEPARATION FORCE: 1-10N

11-WRITE PROTECT PIN
10-CARD DETECT PIN
GROUND(SHELL)-COMMON PIN

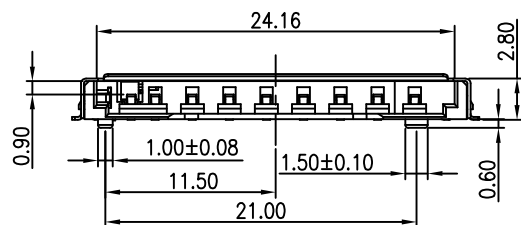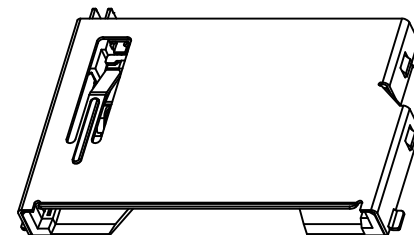


SD CARD PIN DESIGN



PIN NO.	NAME	DESCRIPTION
1#	CD/DAT3	CARD DETECT/DATA I/O
2#	CMD	COMMAND
3#	VSS1	GROUND
4#	VDD	POWER
5#	CLK	CLOCK
6#	VSS2	GROUND
7#	DAT0	DATA I/O
8#	DAT1	DATA I/O
9#	DAT2	DATA I/O
10#	CD	
11#	WP	

MILLIMETERS	INCH	UNITS
X° ± 2°	X° ± 2°	MM
.X ± 0.38	.XX ± 0.015	MAT'L
.XX ± 0.25	.XXX ± 0.010	SEE NOTES
.XXX ± 0.10	.XXXX ± 0.004	FINISH
		SEE NOTES
		QTY
		SEE NOTES

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: XB-10201 1462	TITLE: SD 短体 NONE PUSH (白色)
APPD:	DWG NO.: C-102010752-00
CHKD:	SCALE: 1:1
DR:	SHEET: 1/3
	REV: A2


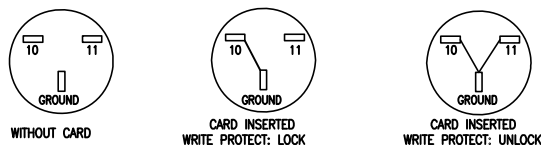


RoHS

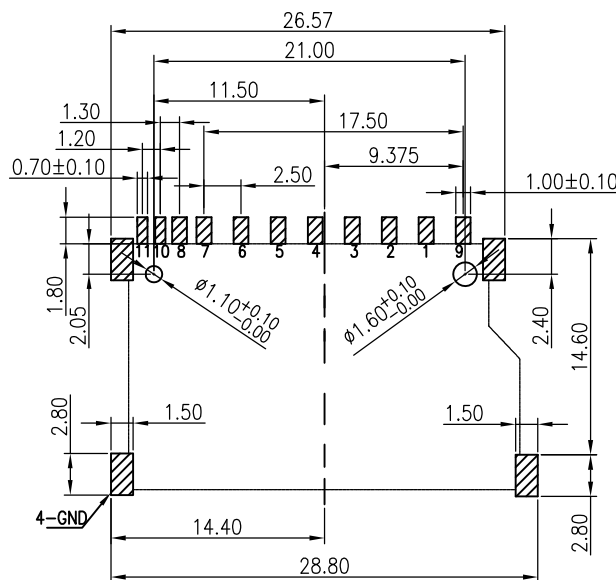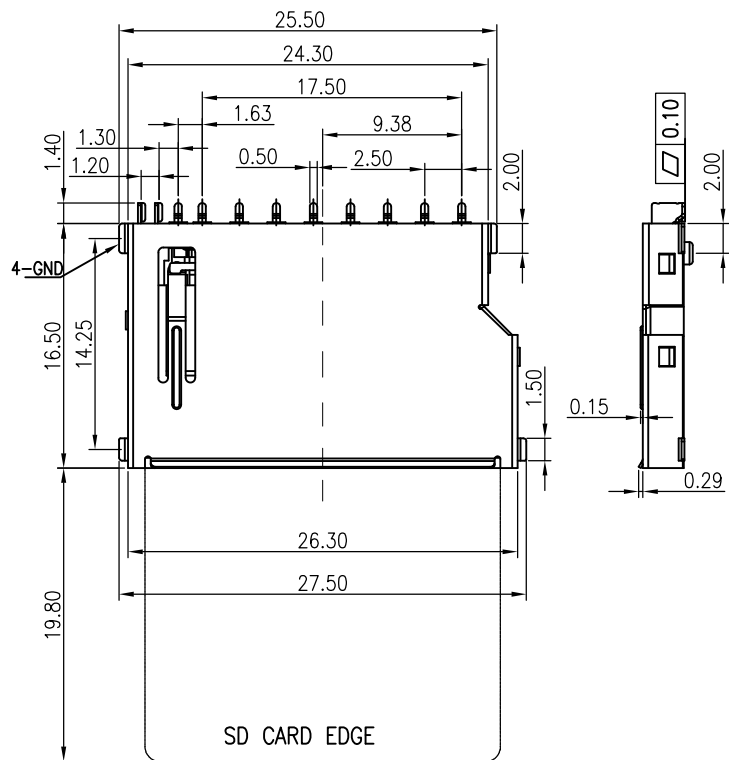

RECOMMENDED P.C.B LAYOUT
(TOLERANCE: +/-0.05)

11-WRITE PROTECT PIN
10-CARD DETECT PIN
GROUND(SHELL)-COMMON PIN

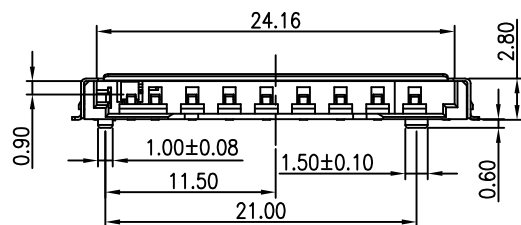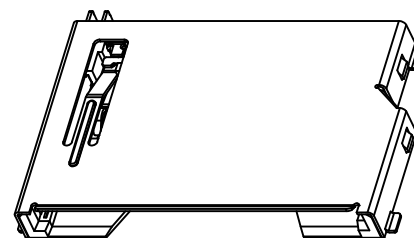


SD CARD PIN DESIGN

PIN NO.	NAME	DESCRIPTION
1#	CD/DAT3	CARD DETECT/DATA I/O
2#	CMD	COMMAND
3#	VSS1	GROUND
4#	VDD	POWER
5#	CLK	CLOCK
6#	VSS2	GROUND
7#	DAT0	DATA I/O
8#	DAT1	DATA I/O
9#	DAT2	DATA I/O
10#	CD	
11#	WP	

MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.38	.XX ± 0.015	SEE NOTES	
.XX ± 0.25	.XXX ± 0.010	FINISH	
.XXX± 0.10	.XXXX± 0.004	SEE NOTES	
		QTY	
		SEE NOTES	

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		PART NUMBER: XB-102011462	TITLE: SD 短体 NONE PUSH (黑色)
APPD:		DWG NO.: C-102011462-00	
CHKD:		SCALE	
DR:		SHEET	
		REV.	
		1:1	
		2/3	
		A2	

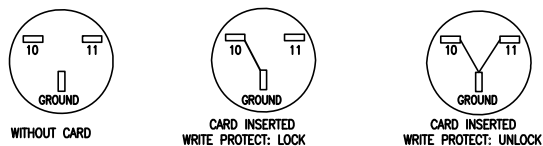

RoHS

将PE袋口封好后，用胶带
十字缠绕一次。

纸箱底部和顶部
各垫一块珍珠棉

护角

PE袋



PE袋内，底部与顶部各放
一袋干燥剂

产品单重：1.52g

外箱

ROHS标签
外箱标签

USER DIRECTION OF UNREELING (客户拉出方向)

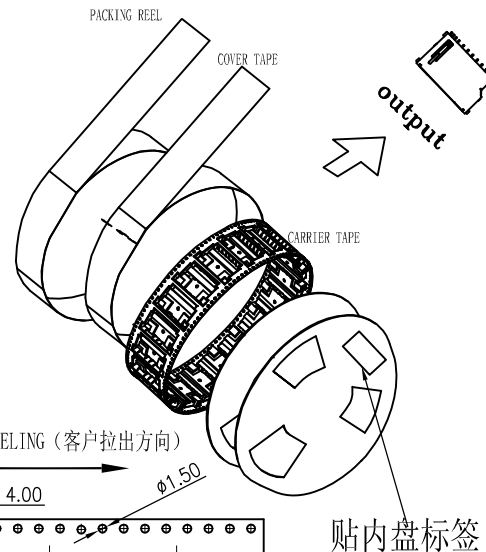

NOTE:

- 1.每卷CARRIER TAPE 前后各留10PCS以上不使用
DON'T USE IN FRONT AREA OF 10PCS AND IN
END AREA OF 10PCS ON EACH CARRIER TAPE.
- 2.每卷CARRIER TAPE放置600个SD CONNECTOR.
EACH CARRIER TAPE ROLL PUT 600 PCS SD
CONNECTOR
- 3.每6卷CARRIER TAPE 用1个PE BAG
EVERY SIX CARRIERS TAPE USE ONE PE BAG
- 4.以COVER TAPE覆盖后，经包装机冷封包装
USE COVER TAPE TO COVER AND COLD
MACHINE TO SEAL UP
- 5.以PSA COVER PLATE覆盖于外圈再以胶带固定
THE OUTSIDE OF THE ROLL USE PAS COVER
PLATE TO COVER AND USE ADHESIVE TAPE TO
FIX
- 6.放入CARTON并以胶带封口
PUT ROLL IN THE CARTON AND USE ADHESIVE
TAPE TO SEAL UP
- 7.CARTON 之麦头贴法请参考生管资料
THE MARK WILL BE PROVIDED BY PMC
- 8.在OUTSIDE CARTON外圈如图所示位置贴标签
STAMP ROHS LABEL ON THE CARTON.
- 9.产品单重1.52g
CONNECTOR WEIGHT: 1.52G/PCS

7	LABEL	PCS	1
6	OUTSIDE CARTON	PCS	1
5	COVER TAPE	M	89.28
4	PACKING REEL	PCS	6
3	PE BAG	PCS	1
2	CARRIER TAPE	SET	6
1	SD CONNECTOR	PCS	3600
NO.	MATERIAL	UNIT	Q'TY

MILLIMETERS	INCH	UNITS MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER:		TITLE:			
.X ± 0.38	.XX ± 0.015	SEE NOTES	XB-10201 1462		SD NONE PUSH			
.XX ± 0.25	.XXX ± 0.010	FINISH	APPD:		DWG NO.:			
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	CHKD:		C-102010752-00			
		QTY	DR:			SCALE	SHEET	REV.
		SEE NOTES				1:1	3/3	A2