
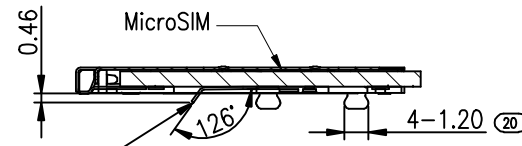
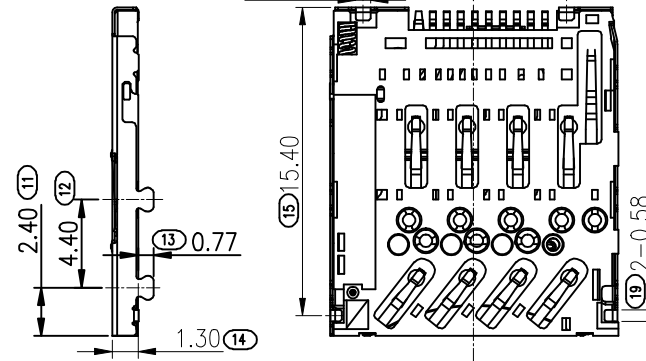



RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	26/01'18	SUPER	SKY	TEDDY

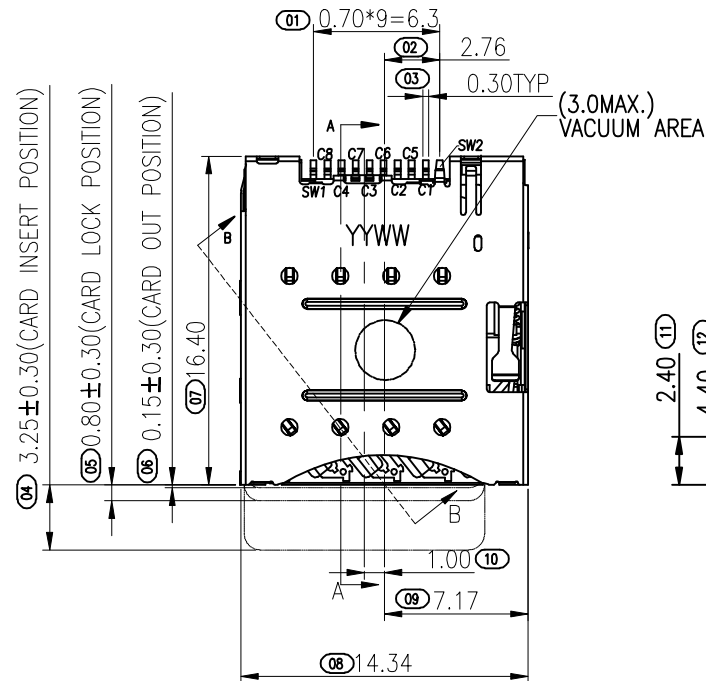

The ends of the terminals reveal the outer surface of the product

SEC A-A

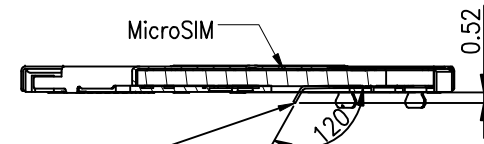

The ends of the terminals reveal the outer surface of the product

SEC B-B

NOTES:

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy

Shell: STAINLESS

PLATING :

TERMINAL:

CONTACT AREA: GOLD OR NICKEL.

SOLDER AREA: MATTE TIN 80U" PLATED.

SHELL: GOLD OR NICKEL.

SOLDER AREA: GOLD PLATED.

Electrical:

Current Rating :1A max.

Voltage Rating :30V DC MAX

Ambient Temperature Range :-20°C~+85°C

Storage Temperature Range :-40°C~+85°C

Ambient Humidity Range :95% R.H. Max.


Contact Resistance:100mΩ maxΩ

Insulation Resistance:1000M Ω min./500V DC

Dielectric Withstanding Voltage:500V AC

Mating Cycles:5,000 Insertions

Temperature: 260°C ±5°

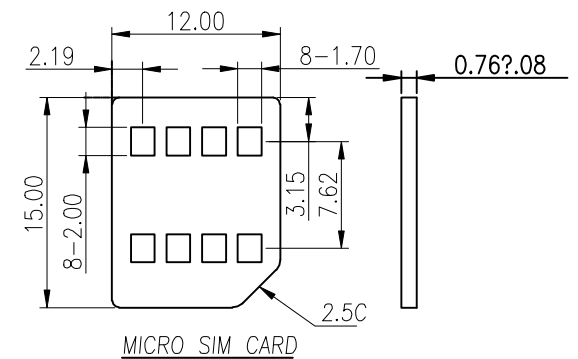

MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X [*] ± 2 [*]	X [*] ± 2 [*]	MM				
.X ± 0.30	.XX ± 0.012	MAT'L				
.XX ± 0.20	.XXX ± 0.008	SEE NOTES				
.XXX ± 0.10	.XXXX ± 0.004	FINISH				
		SEE NOTES				
		QTY				
		SEE NOTES	PART NUMBER: XB-102332212	TITLE: MICRO-SIM PUSH/PUSH 1.280TP 型防PIN卡座		
			APPD:	DWG NO.: C-102332212-00		
			CHKD:			
			DR:			
				SCALE	SHEET	REV.
				1:1	1/3	A0

RoHS

□ :NO WIRING AREA
▨ :BOARD PAD
NOTE 1: ○ :PCB through hole

Figure 5.2 RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ± 0.05


Normally Close


Without Card Situation

Card Inserted Situation

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved
SW1	C/D
SW2	GND

NOTE 1:
After inserting the card, the terminal head will reveal the outer surface of the product, and the PCB will need to be opened to avoid the terminal.


MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
MM					
$X^* \pm 2^*$	$X^* \pm 2^*$	MAT'L	PART NUMBER:	TITLE:	
$.X \pm 0.30$	$.XX \pm 0.012$	SEE NOTES	XB-102332212	MICRO-SIM PUSH/PUSH 1.250IP型标准PIN卡座	
$.XX \pm 0.20$	$.XXX \pm 0.008$	FINISH	APPD:	DWG NO:	
$.XXX \pm 0.10$	$.XXXX \pm 0.004$	SEE NOTES	CHKD:	C-102332212-00	
		QTY	DR:		SCALE
		SEE NOTES			
				1:1	SHEET
				2/3	REV.
					AO



SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved
SW1	C/D
SW2	GND


After inserting the card, the terminal head will reveal the outer surface of the product, and the PCB will need to be opened to avoid the terminal.

GENERAL TOLERANCE ± 0.05

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.						
$X^{\circ} \pm 2^{\circ}$	$X^{\circ} \pm 2^{\circ}$	MAT'L	PART NUMBER:		TITLE:				
.X ± 0.30	.XX ± 0.012	SEE NOTES	XB-102332212		MICRO-SIN PUSH/PUSH 1.2501P型防浪PTN卡座				
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD:		DWG NO.:				
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES			C-102332212-00				
		QTY	CHKD:						
		SEE NOTES	DR:				<table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>2/3</td><td>A0</td></tr></table>	SCALE	SHEET
SCALE	SHEET	REV.							
1:1	2/3	A0							


RoHS

客户拉出方向

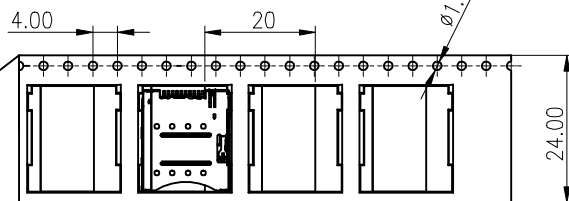

客户拉出方向


自粘上贴



纸箱底部和顶部各垫一块珍珠棉

护角

纸箱




纸箱印有客户LOGO

将10卷产品放入箱内

NOTES

1. 每卷包装数量:1000PCS/每卷

2. 卷带包装方式:

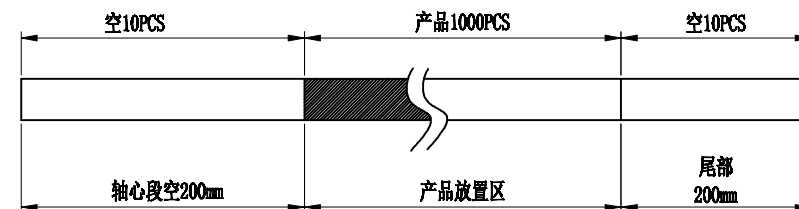

3. 每箱包装数量:10000PCS/箱

4. 纸箱350mm*350mm*340mm(内部尺寸), 材质K=K

封箱胶带“工”字形封好

绿色环保标签

RoHS

产品标签贴在纸箱左上角

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
		MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X ± 2	X ± 2	MAT'L	PART NUMBER:		TITLE:	
.X ± 0.30	.XX ± 0.012	SEE NOTES	XB-102332212		MICRO-SHM FUSE/FUSE 1.250V 250MA 100°C	
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD:		DWG NO.:	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	CHKD:		C-102332212-00	
		QTY	DR:		SCALE SHEET REV.	
		SEE NOTES			1:1 3/3 A0	