

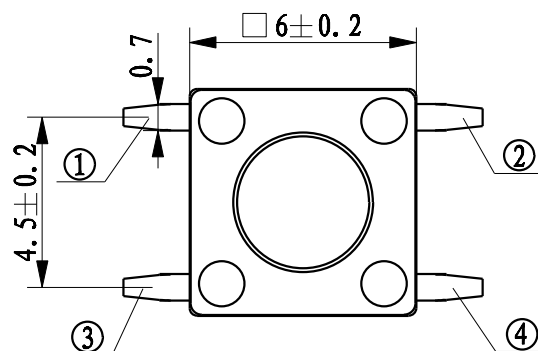
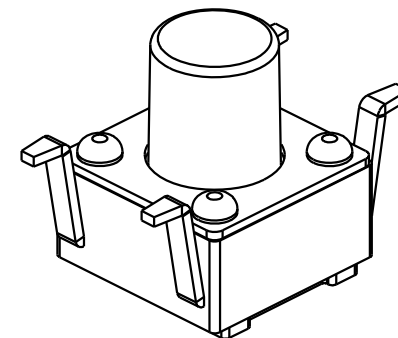
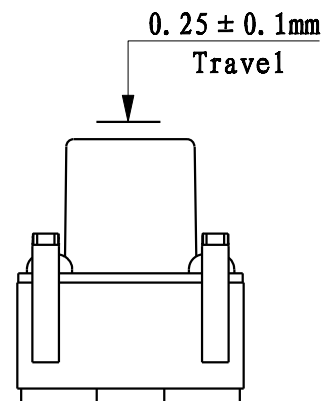


REVISION


A

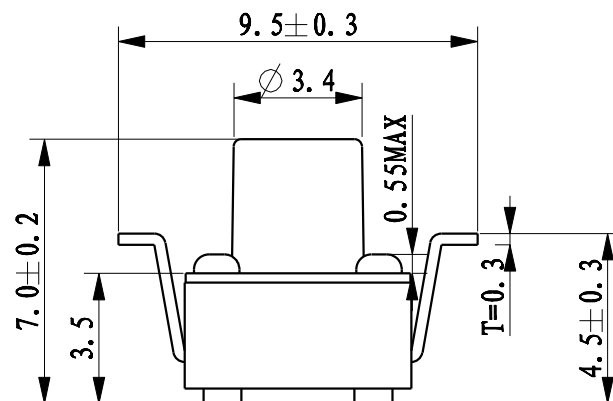

CIRCUIT




P. C. B LAYOUT

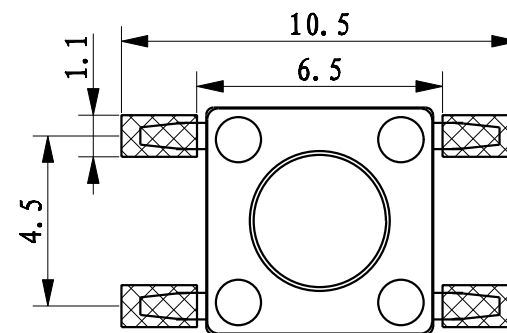

技术参数

1. 额定电流: 50mA 12VDC
2. 接触电阻: 100mΩ
3. 按 力: 260±50gf
4. 行 程: 0.25±0.1mm
5. 绝缘电阻: 100MΩ
6. 抗电强度: 100v 50Hz 1Min
7. 寿 命: 100,000 次

Ø (mm)	H (mm)
3.5	4.3
3.5	4.5
3.5	5.0
3.5	5.5
3.5	6.0
3.3	6.5
3.4	7.0
3.3	7.5
3.3	8.0
3.3	8.5
3.1	9.0
3.1	9.5
3.1	10.0
3.0	10.5
3.0	11.0
3.0	11.5
3.0	12.0
3.0	12.5
3.0	13.0
3.0	13.5
3.0	14.0
3.0	14.5
3.0	15.0
3.0	15.5
3.0	16.0
3.0	17.0

TITLE		TACT SWITCH		DRAWN		许金龙		TOLERANCE OTHERWISE UNLESS SPECIFIED					
PRODUCT NO.		XB-TS-1102S-WM		CHECKED		吴永友							
DRAWING NO.				APPROVED		赵崇生		TOLERANCE		± 0.2			
SCALE		5:1	UNIT	mm	DATE				ANGLE TOL		± 1°		
 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.													
										NO.	PARTS	MATERIAL	QTY