

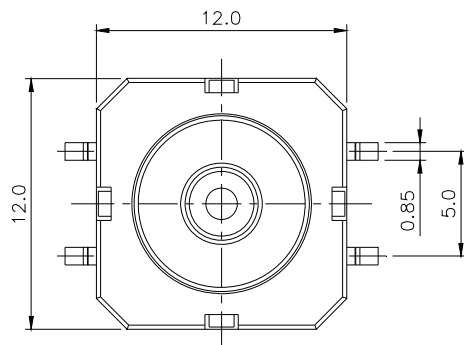
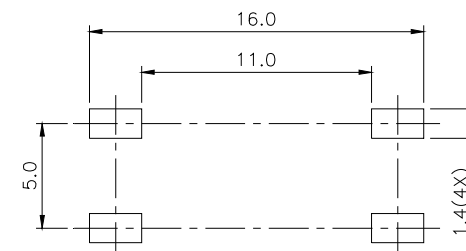
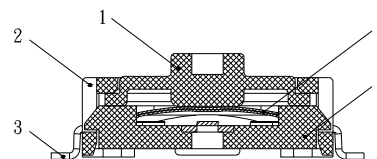
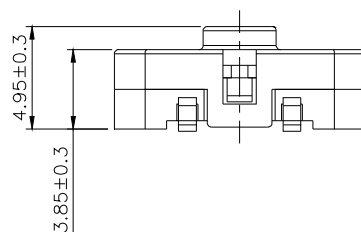


ABIDE BY ROHS



REV	DESCRIPTION	DRW	DATE
A/0	FIRST ISSUE	D X. Zhang	2015-09-07

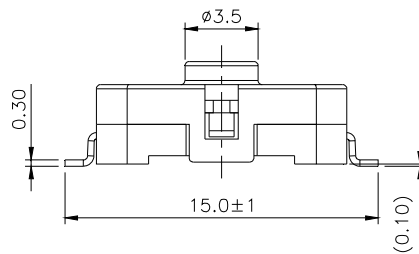

- NOTES:
- 1.RATING: 12VDC 50mA.
 - 2.CONTACT RESISTANCE: 100m Ω Max.(Initial)
 - 3.INSULATION RESISTANCE: 100M Ω (at 500VDC)
 - 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MINUTE.
 - 5.OPERATING LIFE:1,000,000 CYCLES MIN.
 - 7.OPERATION FORCE:700 $\pm$ 150gf.
 - 8.TRAVEL: 0.7 $\pm$ 0.3mm.
 - 9.OPERATING TEMPERATURE: -20°C to 70°C.



P.C.B.LAYOUT

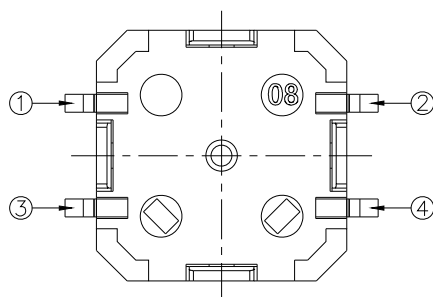

CIRCUIT

NO.	PART NAME	MATERIAL	QTY.	FINISHING
1	BUTTON	SILICONE RUBBER	1	WHITE
2	COVER	PA	1	BLACK
3	TERMINAL	H65 (C2680)	4	Ag PLATED
4	CONTACT	STAINLESS STEEL METAL	2	
5	BASE	PA	1	BLACK



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE				DRAWN		DATE		TITLE	
UNLESS OTHERWISE STATED				D X. Zhang		2015. 09. 07		TACT SWITCH	
X.X	± 0.25	$\angle$	$\pm 1^\circ$	CHK'D		DATE		MODEL	
X.XX	± 0.15	UNIT	mm	XZ. Ou		2015. 09. 07		MATL	
REV.	A/0	SCALE	3:1	APPV'D		DATE		FINISH	
SIZE	A4	SHEET	1 OF 1	SL. Yang		2015. 09. 07			

