
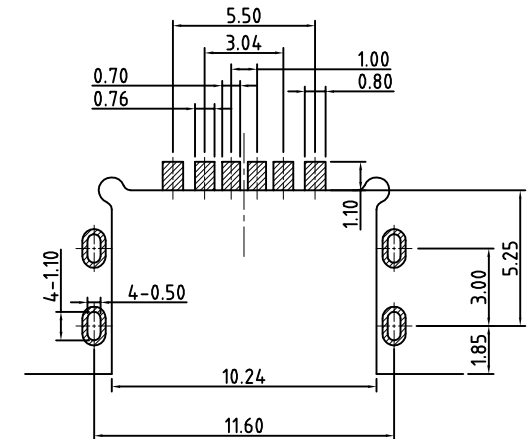


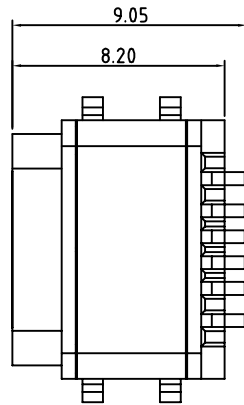
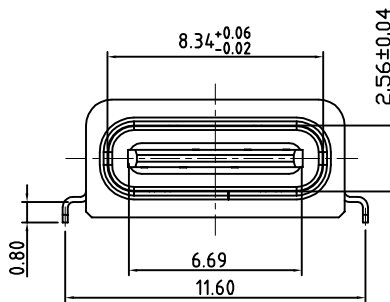
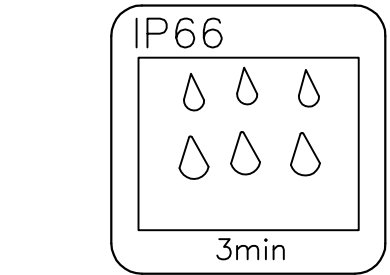


RoHS



REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	03/12'21	BX	/	MOON

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 3A;
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DURABILITY: 10,000 CYCLES MIN.;
 - INSERTION FORCE: 5-20N;
 - EXTRACTION FORCE: 6-20N;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6.
 - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

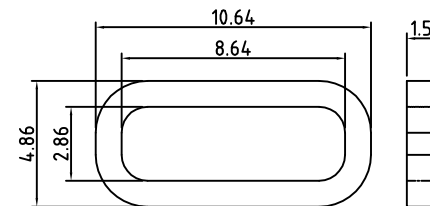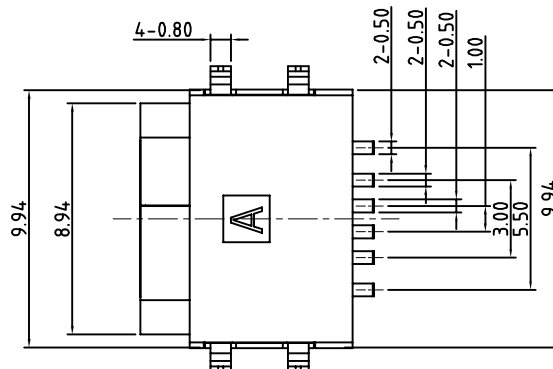



建议胶圈尺寸

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS304R-1/2H Ni PlatingT=0.25mm	
2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (G.F30%)	


MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.38	.XX ± 0.015	SEE NOTES	
.XX ± 0.25	.XXX ± 0.010	FINISH	
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES	
		QTY	
		SEE NOTES	

XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: XB-104315002	TITLE: TYPE-C A/F 6PIN沉板0.6mm 防水型
APPD:	DWG NO.: C-104315002-00
CHKD:	
DR:	
	SCALE: 1:1
	SHEET: 1/2
	REV: A0

RoHS

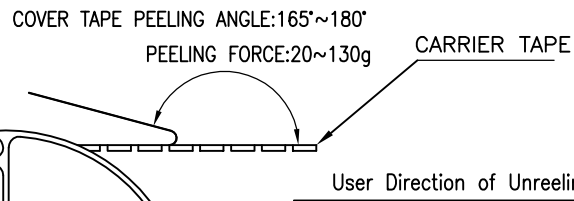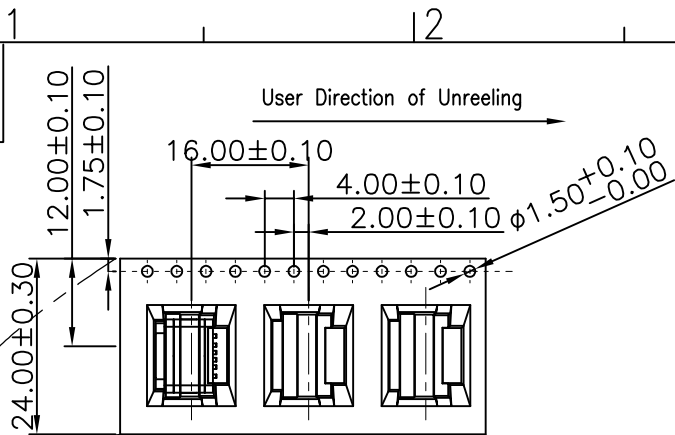


DETAIL B

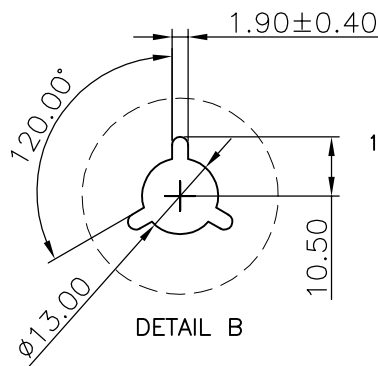

NOTES

1. NUMBER OF CONNECTORS:700PCS/REEL

2. LEAD TAPE LENGTH

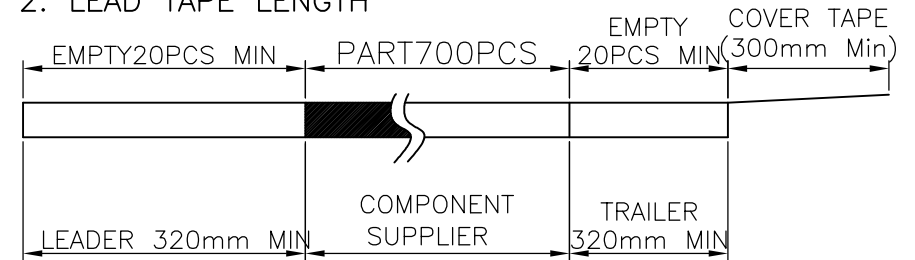


3. QUANTITY:7000PCS/CARTON


CARTON
342*342*250 K=K

4-TRIANGLE PARTITION
380*235*5 K3K

10-REEL



MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER:	TITLE:
.X ± 0.30	.XX ± 0.012	SEE NOTES		XB-104315002	TYPE-C A/F 6PIN沉板0.6mm 防水型
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD:	DWG NO.:
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:	C-104315002-00
		QTY		DR:	
		SEE NOTES			



SCALE	SHEET	REV.
1:1	2/2	A0