

F

E

D

C

B

A

RoHS
Compliant

SYMBOL



REVISION

APPROVAL

DATE

1

1

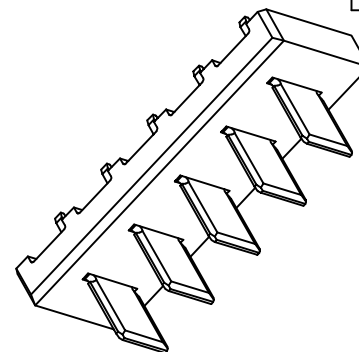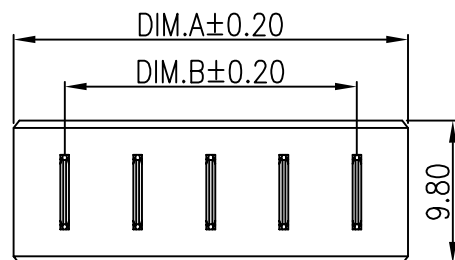

备注:

1. 产品规格:

1-1. 额定电压:30V

1-2. 耐电压:1000V AC MIN.

1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX
AFTER 3000 CYCLES

1-4. 绝缘电阻:1000MΩ MIN

1-5. 工作温度:-25°C TO +80°C

2. 材质:



2.1胶芯: PA9T UL94V-0/LCP BLACK

2.2端子: 合金铜, 镍底, GOLD

3. 所用材质须符合RoHS要求

2



2

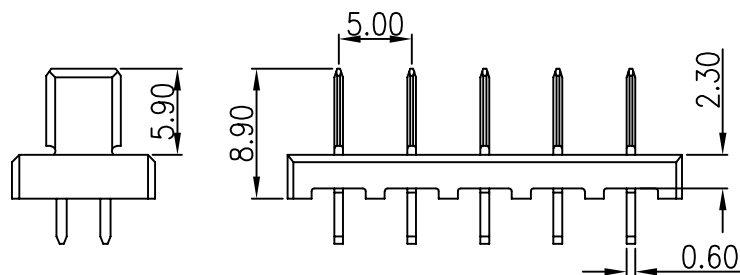

PART NUMBER	PIN	Dim.A	Dim.B
Battery PH5.0 H=8.9mm	02pin	12.00	5.00
Battery PH5.0 H=8.9mm	03pin	17.00	10.00
Battery PH5.0 H=8.9mm	04pin	22.00	15.00
Battery PH5.0 H=8.9mm	05pin	27.00	20.00

3

3

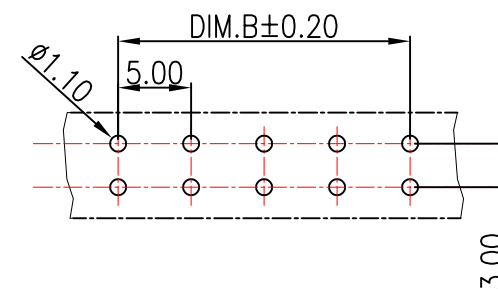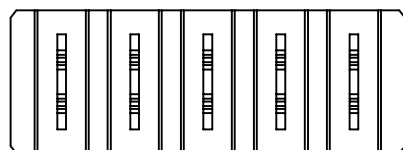

RECOMMENDED P.C.BOARD LAYOUT

4

4

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

M.M.Zhang

DWG.No.

JD-009

PART NO.

XB-Z01S-CT 180度公座

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE

±0.2

±0.3

±0.5

±3°

ANGLE

0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

01-07-2016

1 OF 1

F

E

D

C

B

A