


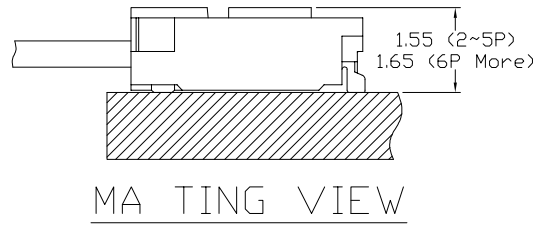


XB-AM-1224WRS-XX-LCPV01

PIN数

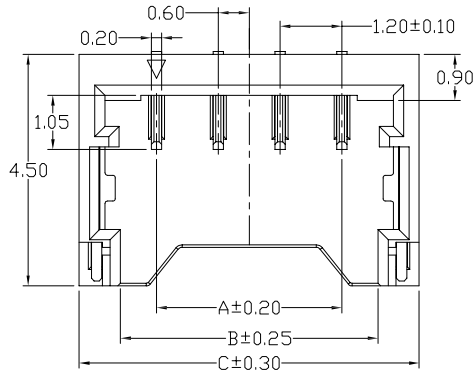

poles	Dimensions (mm)		
	A	B	C
2P	1.20	2.60	4.20
3P	2.40	3.80	5.40
4P	3.60	5.00	6.60
5P	4.80	6.20	7.80
6P	6.00	7.40	9.00
7P	7.20	8.60	10.20
8P	8.40	9.80	11.40
9P	9.60	11.00	12.60
10P	10.80	12.20	13.80
11P	12.00	13.40	15.00
12P	13.20	14.60	16.20
13P	14.40	15.80	17.40
14P	15.60	17.00	18.60
15P	16.80	18.20	19.80

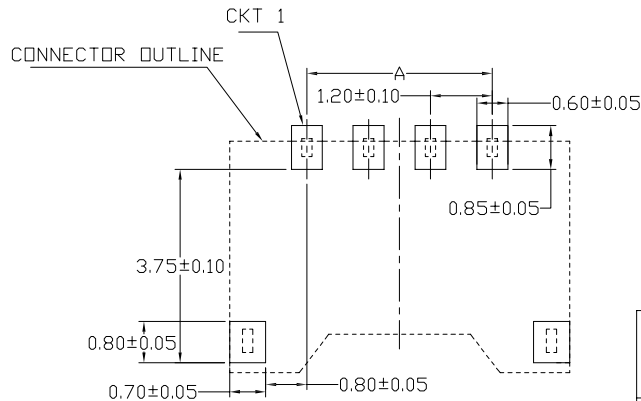

specifications规格:

- .voltage rating (额定电压): 30V AC/DC
- .Current rating (额定电流): 2A AC/DC
- .Withstanding voltage (耐压值): 500V AC/minute
- .Temperature range (工作温度): -25° ~ +85°
- .Insulation resistance (绝缘电阻): >100MΩ
- .Contact resistance (接触电阻): <20MΩ
- .After environmental testing (环境测试后) <30MΩ

XB-AM-1224WRS-XX	Nylon46 UL 94V-0	Brass	Gold-Flash	Brass	Tin Plating Fog	XB-AM-1224	1,000PCS
	Nylon46 UL 94V-0						
PART NO	Material	Material (pin)	Finish (pin)	Material (pin)	Finish (pin)	Mates With	Quantity/Bag

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

一般公差
GENERAL TOLERANCE
.X ±0.3
.XX ±0.2
.XXX ±0.1

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

料号 PART NO
XB-AM-1224/2P-7P

品名 TITLE
1.20 mm Crimp Style connectors

核准 APPD 审核 CHK 绘图 DR 日期 DATA

日期 DATA	旧版次 OLD REV	新版次 NEW REV	审核 CHK	核准 APPD	角法 PROJECT	单位 UNITS	比例 SCALE	图号 NUMBER	版次 REV
						M M	1/1	A-106	B