

F

E

D

C

B

A

RoHS
Compliant

SYMBOL

REVISION

APPROVAL

DATE

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 3A max

1-2.CONTACT RESISTANCE: 20mΩ MAX(INITIAL)









1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100MΩ MIN,

MEASURED BY 500V DC

2. LIFE TEST:MECHANICAL LIFE TEST 5,000 CYCLES MIN

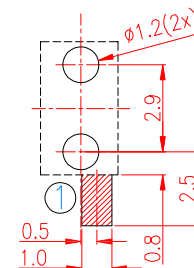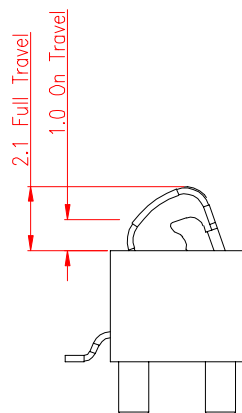

P.C.B LAYOUT
TOP VIEW

CIRCUIT

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	C5210	1	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	DWG.No.	
PART NO.	XB-245-1P		CHECK	REV.	A0
UNIT :	TOLERANCE	UP TO 5	ANGLE	APPROVAL	DATE
mm	OTHERWISE	ABOVE 5 ~30	0°±3'	SCALE	PAGE
		±0.2		2:1	1 OF 1
		±0.3			
		±0.5			
		±3'			

F

E

D

C

B

A