

RoHS
Compliant









SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 12V 3A max
- 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2. LIFE TEST:MECHANICAL LIFE TEST 5,000 CYCLES MIN

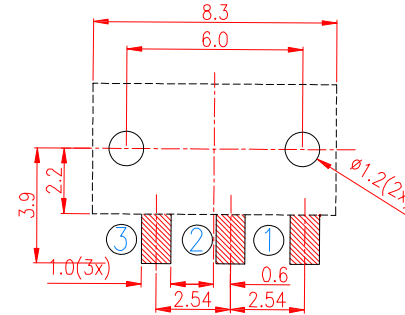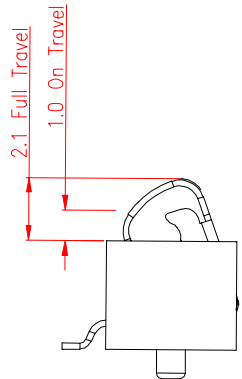

P.C.B LAYOUT
TOP VIEW

CIRCUIT

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	C5210	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	CONNECTOR	DRAWING	DWG.No.
PART NO.	XB-BC-245-3P	CHECK	REV. A0
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°
	ANGLE	0°±3°	APPROVAL
		SCALE	2:1
		PAGE	1 OF 1