RoHS Compliant	SYMBOL	REVISION	APPROVAL	DATE

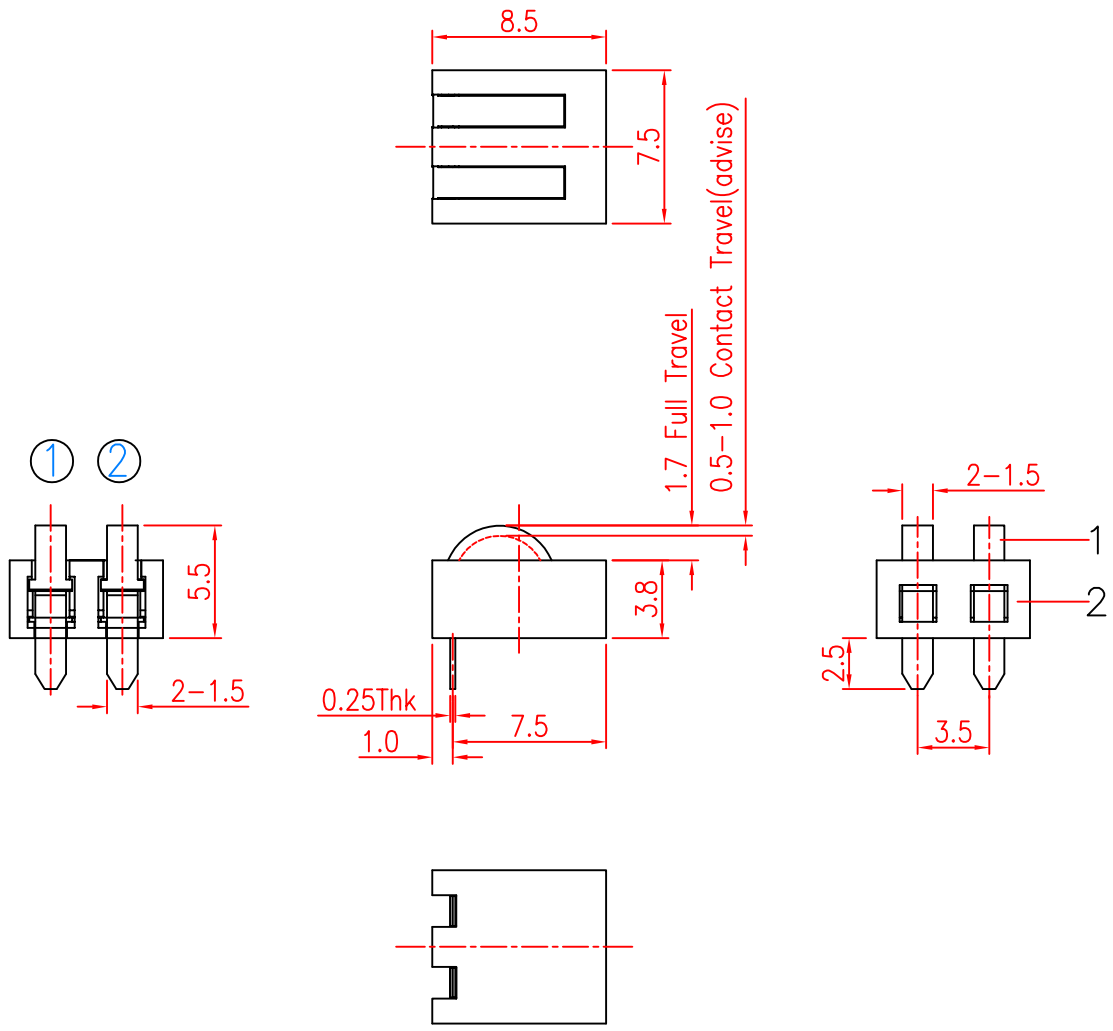

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:
   1-1.RATING: DC 12V 3A
   1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
   1-3.DIELECTRIC WITHSTANDING VOLTAGE:
   500V AC FOR ONE MINUTE
   1-4.INSULATION RESISTANCE: 100MΩ MIN,
   MEASURED BY 500V DC
2. FORCE:0.6mm CONTACT TRAVEL:600gf Max.
3. LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
4. TEMPERATURE RISE : 30°C MAX





P.C.B LAYOUT

CIRCUIT

NO.	PARTS	MATERIAL	QTY.	FINISHING
2	HOUSING	PPA	1	BLACK
1	CONTACT TERMINAL	C70350	2	Au PLATED

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	CONNECTOR	DRAWING	ZENQ.Chen	DWG.No.	XB-BC-35-2P
PART NO.	5.5H-3.5PH	CHECK	ZENQ.Chen	REV.	A0
UNIT : mm	TOLERANCE OTHERWISE: UP TO 5 ±0.2; ABOVE 5 ~30 ±0.3; ABOVE 30 ±0.5; ANGLE ±3°; ANGLE 0°±3°	APPROVAL		DATE	08-01-2016
		SCALE	2:1	PAGE	1 OF 1