
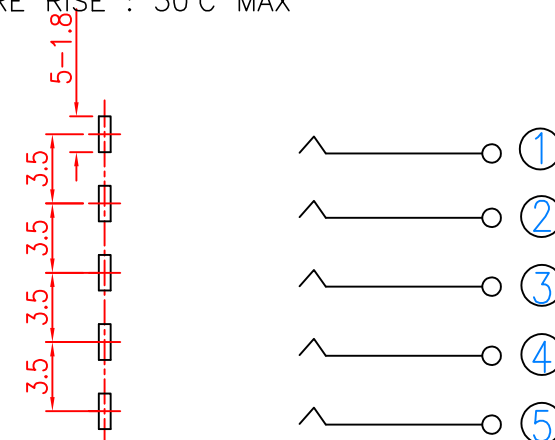
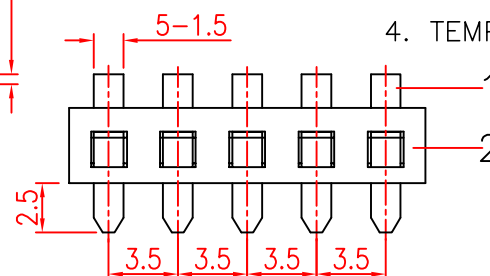


1. ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 3A
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC
2. FORCE:0.6mm CONTACT TRAVEL:600gf Max.
3. LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
4. TEMPERATURE RISE : 30°C MAX

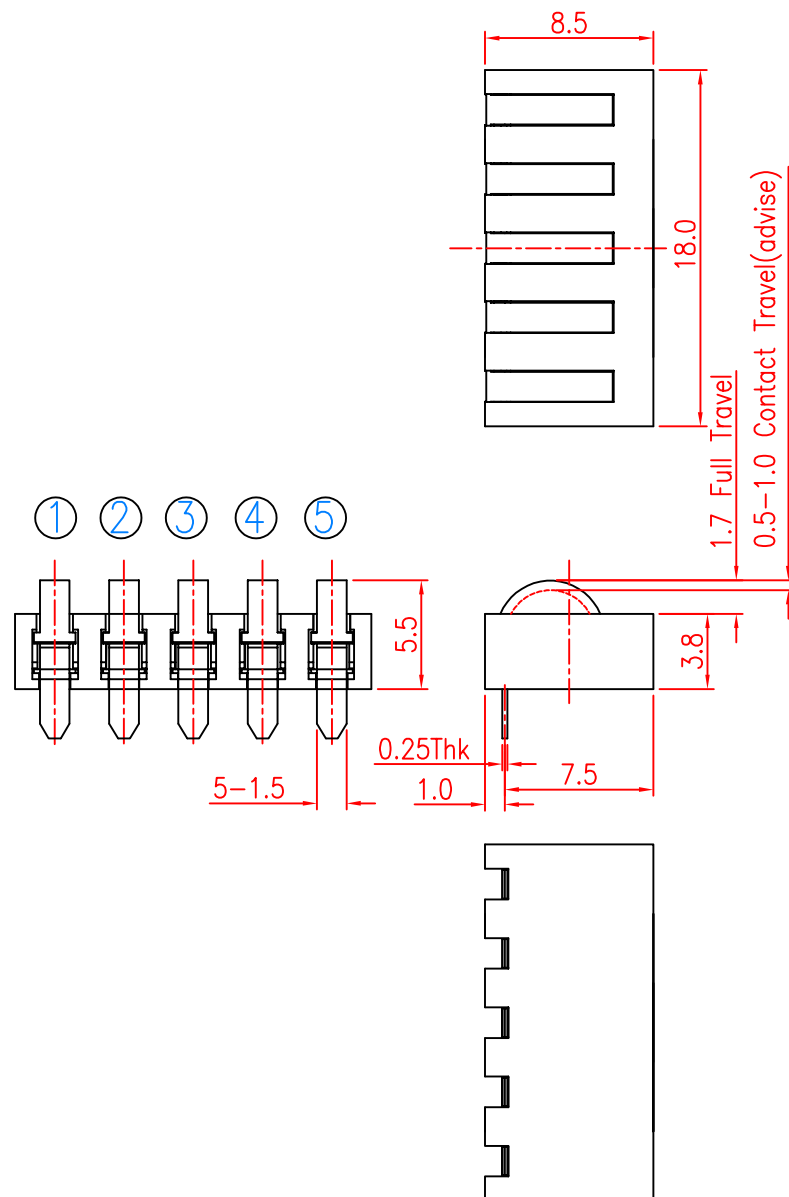

P.C.B LAYOUT CIRCUIT

2	HOUSING	PPA	1	BLACK
1	CONTACT TERMINAL	C70350	5	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

PART NAME		CONNECTOR				DRAWING	ZENQ.Chen	DWG.No.	XB-BC-35-5P
PART NO.		5.5H-3.5PH				CHECK	ZENQ.Chen	REV.	A0
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	08-01-2016	
	mm		ABOVE 5 ~30	±0.3		SCALE			
			ABOVE 30	±0.5	0°±3°	2:1	PAGE	1 OF 1	
			ANGLE	±3°					