


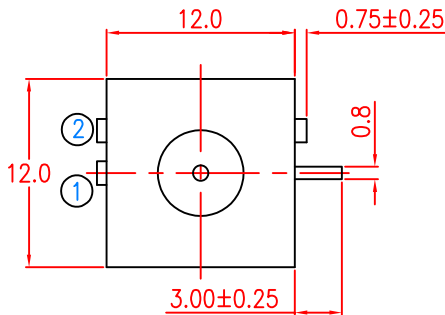
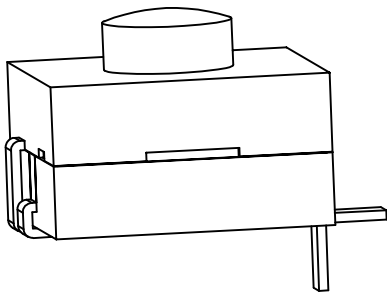

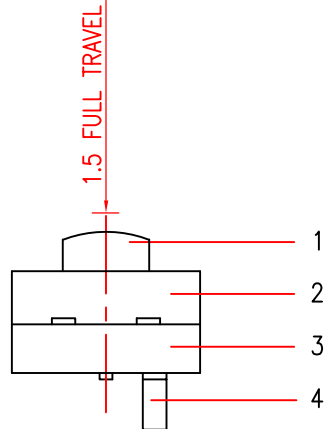


SYMB	REVISION	DATE	APVD.
⚠	PS SERIES → TPS SERIES	14-05-2011	陈桂昌

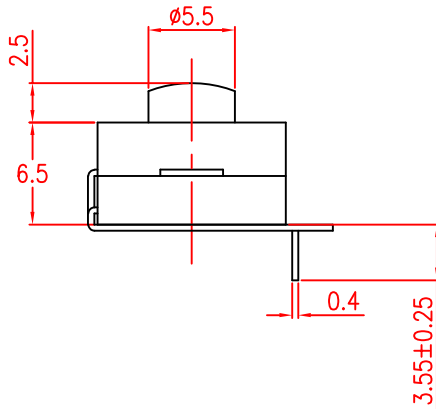

P.C. BLAYOUT

- SPECIFICATION:
- 1.Rating:1A 30V DC
 - 2.Contact resistance:100mΩ max
 - 3.Insulation resistance:100MΩ min
 - 4.Withstand Voltage:500 AC for 1 minute
 - 5.Operating force:550gf;750gf;850gf
 - 6.Life:50000 cycles.



CIRCUIT

TITLE	TORCH SWITCH	DRAWN	L.Liu	TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.	XB-TPS-112D05	CHECKED	G.C.Chen	UP TO 5	±0.2	7			
DRAW NO.	P215	APPROVED	H.K.Lai	ABOVE 5 ~ 30	±0.3	6			
SCALE	2:1	UNIT	mm	ABOVE 30 ~ 50	±0.4	5	TERMINAL	BRASS STRIP	2 Ag PLATED
				ABOVE 50	±0.5	4	HOUSING	POM	1 BLACK
				ANGLE	±3°	3	COVER	POM	1 BLACK
						2	KNOB	POM	1 BLACK
						1	PARTS	MATERIAL	QTY. FINISHING

