

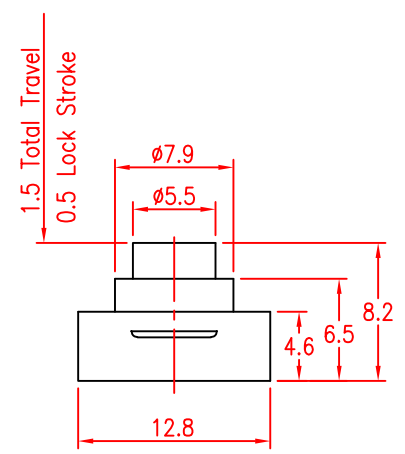
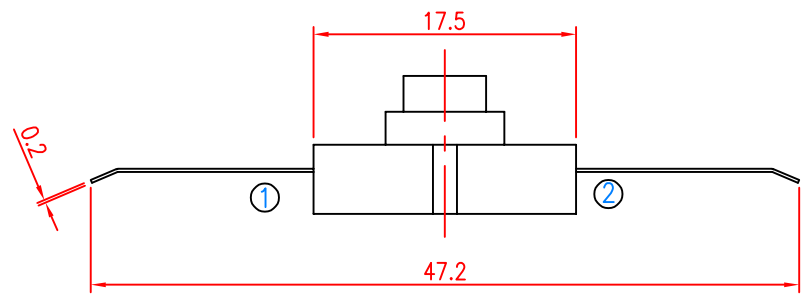
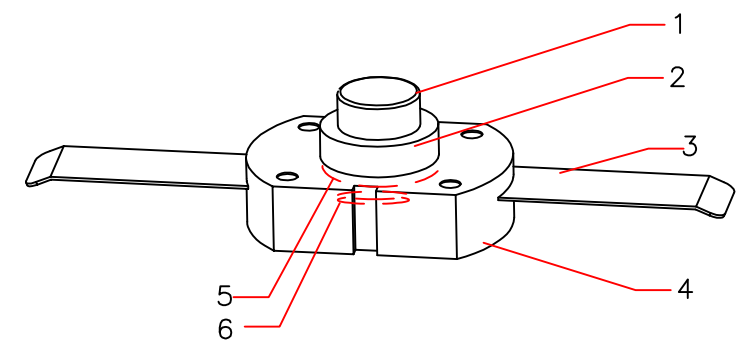


SYMB	REVISION	DATE	APVD.

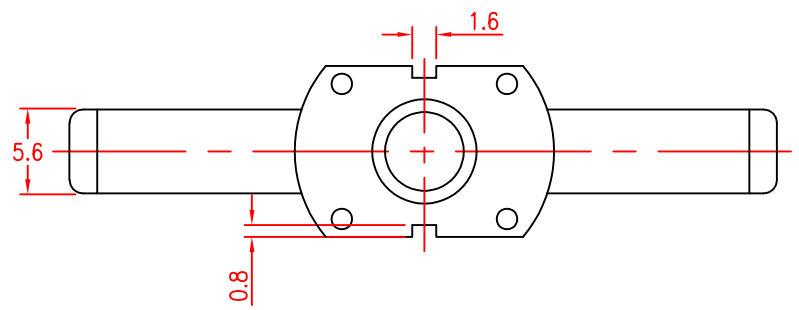

CIRCUIT

- SPECIFICATIONS**
- 1.RATING:1A 30V DC
 - 2.CONTACT RESISTANCE:100mΩ Max
 - 3.INSULATION RESISTANCE:100MΩ Min
 - 4.WINSAND VOLTAGE:500 AC FOR 1 MINUTE
 - 5.OPERATING FORCE:550gf;750gf;850gf
 - 6.LIFE:50000 CYCLES.

TITLE		TORCH SWITCH		DRAWN	L.Liu	TOLERANCE OTHERWISE UNLESS SPECIFIED		8				
								7				
PART NO.	XB-TPS-11D07-N-750		CHECKED	G.C.Chen	UP TO 5	±0.2	6	TERMINAL	C2680	1	Ag PLATED OVER Ni PLATED	
					ABOVE 5 ~ 30	±0.3	5	CONTACT PLATE	C2680	1	Ag PLATED OVER Ni PLATED	
DRAW NO.	P8		APPROVED	H.K.Lai	ABOVE 30 ~ 50	±0.4	4	BUTTON	POM	1	WHITE	
					ABOVE 50	±0.5	3	TERMINAL① ②	C2680	2	Ag PLATED OVER Ni PLATED	
SCALE: 2:1	UNIT: mm	DATE: 31-03-2012			ANGLE	±3°	2	COVER	POM	1	WHITE	
 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							1	KNOB	POM	2	WHITE	
							NO.	PARTS	MATERIAL	QTY.	FINISHING	
							Copyright Reserved,Please Do Not Copy.					