
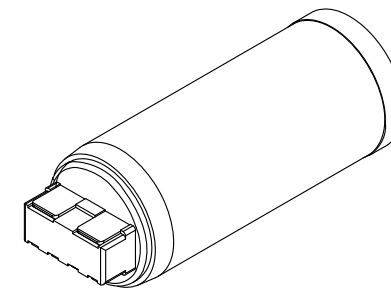
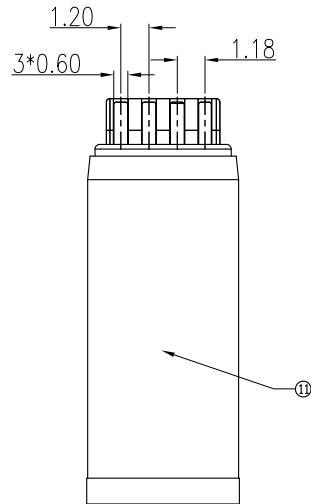
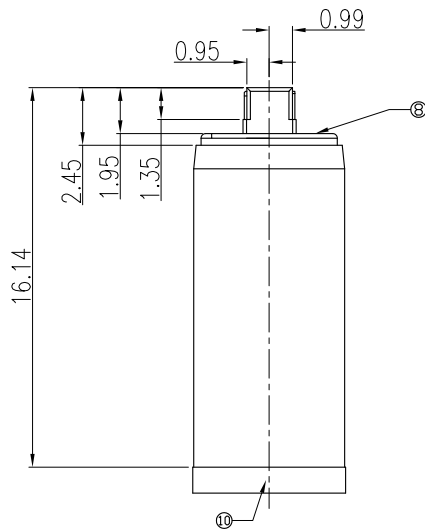


RoHS Compliant

Halogen Free




CUSTOMER DRAWING

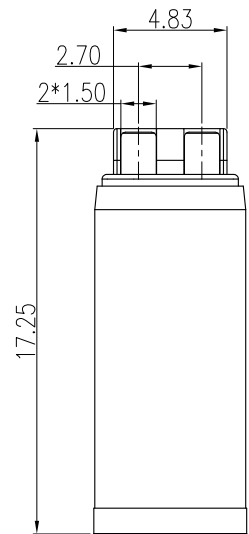

3D VIEW

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 0.5 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute
4. MECHANICAL:
 - 4.1. INSERTION FORCE RANGE: 1.0 to 2.5 kgf
 - 4.2. EXTRACTION FORCE RANGE: 0.6 to 1.8 kgf
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C ~+80°C

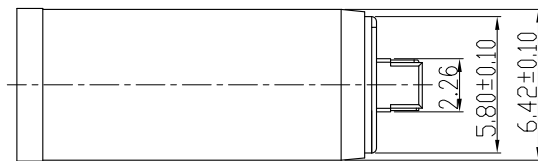

PLUG SPEC

SCHEMATIC

AFTER INSERT SCHEMATIC

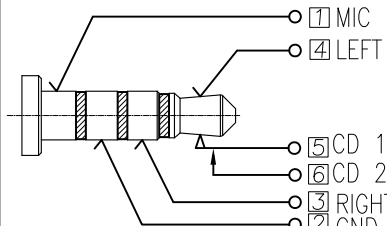

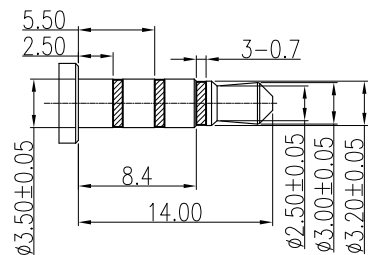


TABLE 1:

⑪	Plastics Ring	1	HIGH TEMP	White	UL94 V-0
⑩	Ring	1	C3604	Nickel.PLATED	
⑨	Insulator	1	HIGH TEMP	Black	UL94 V-0
⑧	Cover	1	HIGH TEMP	White	UL94 V-0
⑦	Housing	1	HIGH TEMP	White	UL94 V-0
⑥	Contact_6	⑥	1	COPPER ALLOY	T=0.20mm
⑤	Contact_5	⑤	1	COPPER ALLOY	T=0.20mm
④	Contact_4	④	1	COPPER ALLOY	T=0.20mm
③	Contact_3	③	1	COPPER ALLOY	T=0.20mm
②	Contact_2	②	1	COPPER ALLOY	T=0.20mm
①	Contact_1	①	1	COPPER ALLOY	T=0.20mm

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
-----	-----------	-----	----------	-------------	--------

UNLESS OTHERWISE,
GENERAL TOLERANCE:X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
X. ±0.38

ANGULAR:

X.xx ±1°
X.x ±3°
X. ±5°**XG** 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE: ø3.5mm Phone Jack CONN.		P/N: J362J06J62NL2	
客户图		MODEL: J362-2	
THIRD ANGLE PROJECTION		DRAW NO.:	
UNIT: mm		SCALE: 1:1	SIZE: A4
		SHEET: 1/1	

PLUG SPEC		SCHEMATIC		AFTER INSERT SCHEMATIC	

JH2017-067	X1	X1;修改后盖结构改善自动机定位	2017.05.19	钟凯
N/A	X	NEW DRAWING	2017.04.27	钟凯
ECN NO.	REV.	DESCRIPTION	DATE	CHANGE

DESIGN	钟凯	2017.05.19
CHECK	郑小伟	2017.05.19
APPROVAL	殷芳祥	2017.05.19