


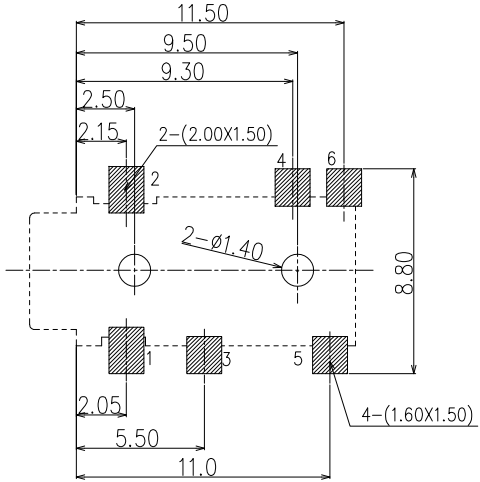

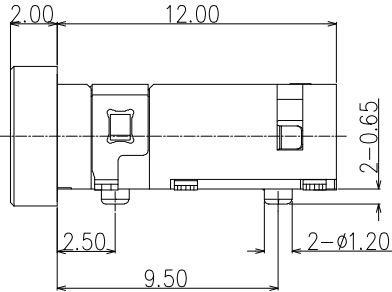


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11 /20 /17"




1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

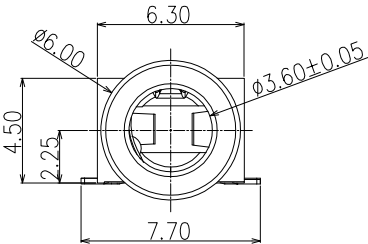

3D VIEW

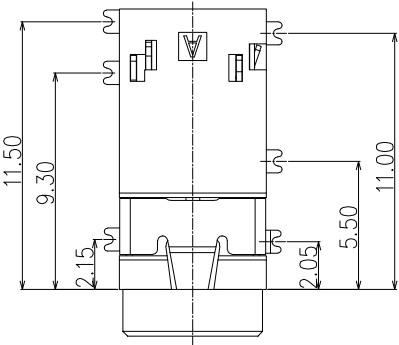

P.C.B LAYOUT
TOP VIEW

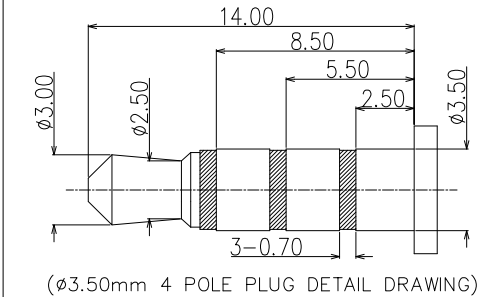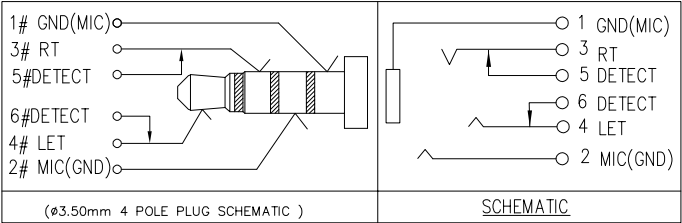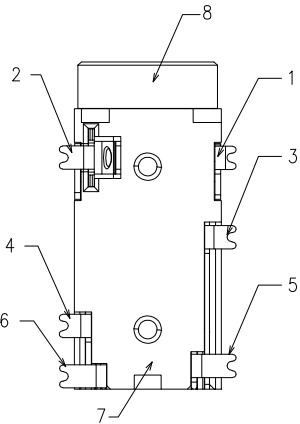

8	SLEEVE	1	COPPER ALLOY;NICKEL UNDER PLATING OVERALL
7	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK
6	TERMINAL 6#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
5	TERMINAL 5#	1	
4	TERMINAL 4#	1	
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
2	TERMINAL 2#	1	
	TERMINAL 1#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
ITEM	NAME	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCES				XG 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DWG NO.		PART NAME:	
DIM	TOL	DIM	TOL	DESIGN:	Lucky	ø3.5mm PHONE JACK H=4.5 mm SMT TYPE CONNECTOR	
X.	±0.50	X.	±2°	CHECK:		PART NO.	
X.X	±0.30	X.X	±1°			XB-PJ35A051-F06G1BR-N	
X.XX	±0.20	X.XX		APPROVED	Lucky	REV.	UNIT: SHEET:
X.XXX	±0.10	X.XXX				A	mm 1/1