


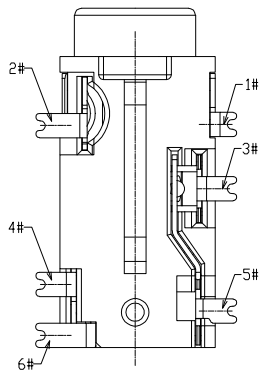
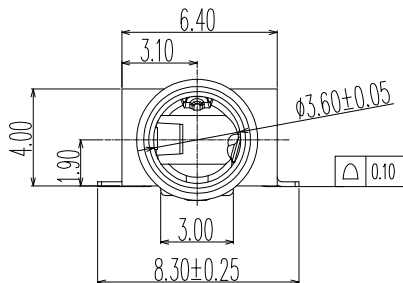



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11 /20 /17'

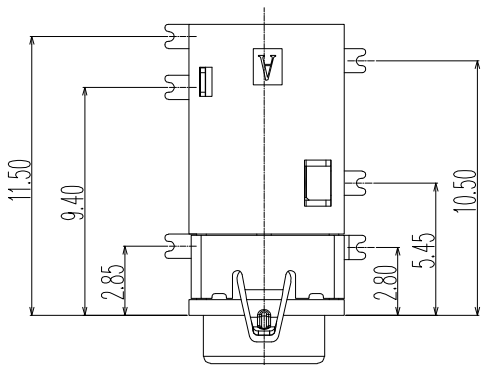



3D VIEW

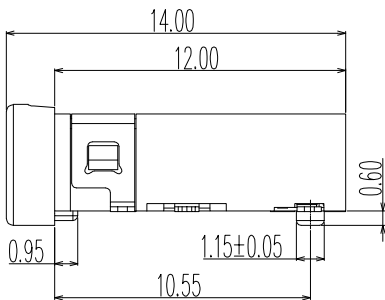

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

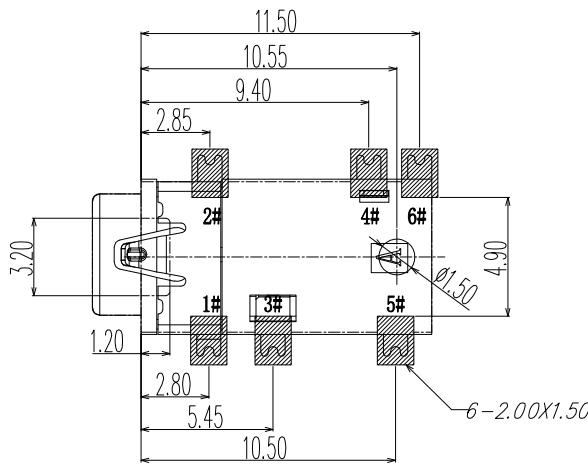

P.C.B LAYOUT
TOP VIEW

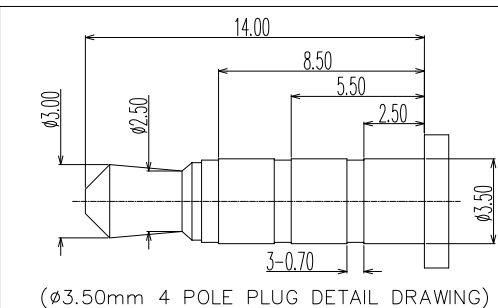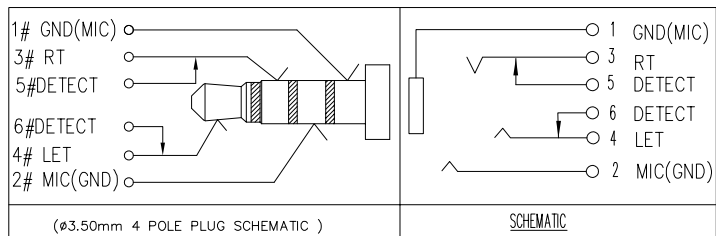

7	TERMINAL 6#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
6	TERMINAL 5#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
5	TERMINAL 4#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
4	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
3	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	
2	TERMINAL 1#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
1	HOUSING	1	HIGH TEMPERATURE PLASTIC;COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	QP TP IP
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	
X.	±0.25
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
ANGULAR	±3°

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN: Lucky	DATE 2019/11/20	TITLE:
CHECKED	DATE	Ø3.5mm PHONE JACK H=4.0 mm
APPROVED	DATE	SMT TYPE CONNECTOR
PART NO. XB-PJ35A057-F06G1BR-A	REV.: A	SCALE: 1:1
DRAWING NO.	SIZE: A4	SHEET: 1/1