


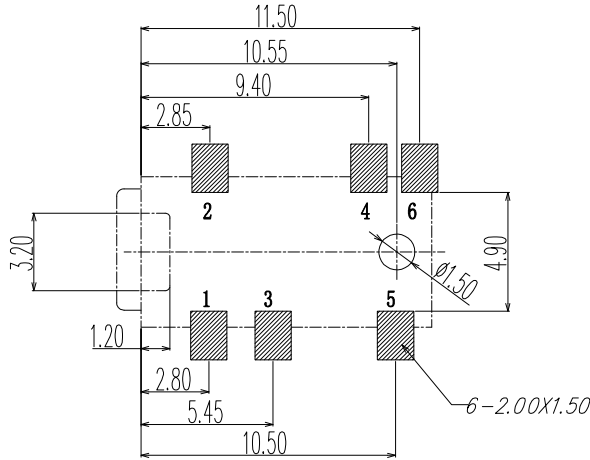
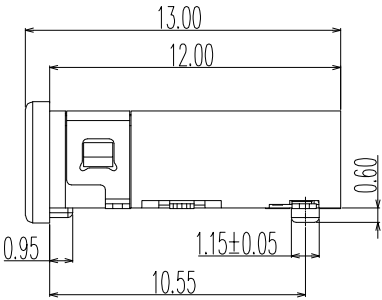


| REV. | ECN. NO. | DESCRIPTION | ENG   | DATE        |
|------|----------|-------------|-------|-------------|
| A    |          | INITIAL     | Lucky | 11 /20 /17' |




1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

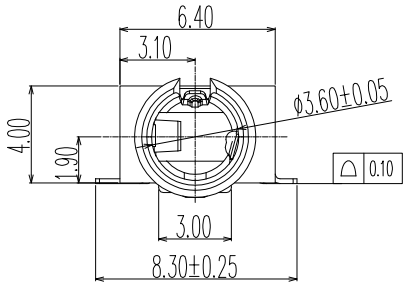

3D VIEW

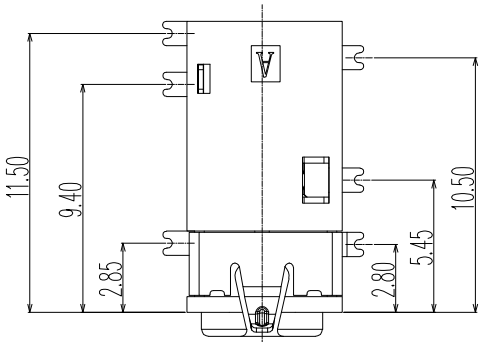

P.C.B LAYOUT  
TOP VIEW

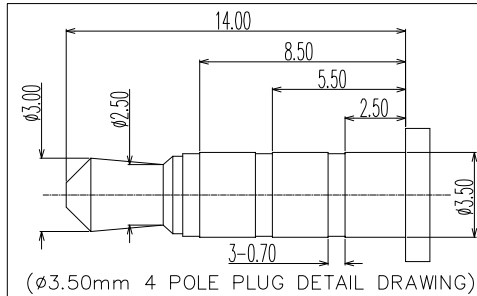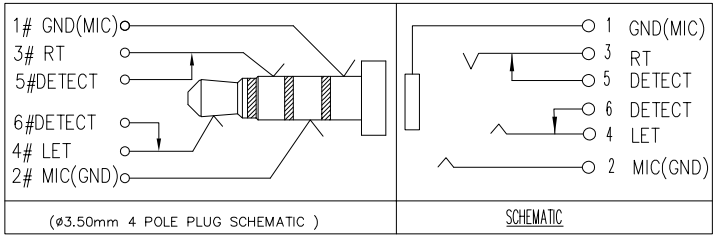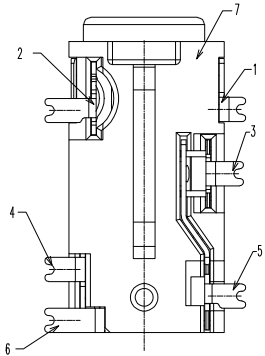

|      |             |      |                                                                                                      |
|------|-------------|------|------------------------------------------------------------------------------------------------------|
| 7    | HOUSING     | 1    | HIGHT TEMPERATURE PLASTIC COLOR BLACK                                                                |
| 6    | TERMINAL 6# | 1    | COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA |
| 5    | TERMINAL 5# | 1    | COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA |
| 4    | TERMINAL 4# | 1    | COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA |
| 3    | TERMINAL 3# | 1    | COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA |
| 2    | TERMINAL 2# | 1    | COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.                                      |
| ITEM | NAME        | Q'TY | DESCRIPTION                                                                                          |

|                                                                          |                |
|--------------------------------------------------------------------------|----------------|
| MEASURE POINT:<br>QUADRANT POINT<br>TANGENCY POINT<br>INTERSECTION POINT | QP<br>TP<br>IP |
| UNLESS OTHERWISE<br>SPECIFIED, TOLERANCE:                                |                |
| X.                                                                       | ±0.25          |
| X.x                                                                      | ±0.20          |
| X.xx                                                                     | ±0.15          |
| X.xxx                                                                    | ±0.10          |
| ANGULAR                                                                  | ±3°            |

|                                |  |                 |  |                            |          |
|--------------------------------|--|-----------------|--|----------------------------|----------|
| DESIGN: Lucky                  |  | DATE 2019/11/20 |  | TITLE:                     |          |
| CHECKED                        |  | DATE            |  | Ø3.5mm PHONE JACK H=4.0 mm |          |
| APPROVED                       |  | DATE            |  | SMT TYPE CONNECTOR         |          |
| PART NO. XB-PJ35A057-F06G1BR-D |  | REV.: A         |  | SCALE: 1:1                 | UNIT: mm |
| DRAWING NO.                    |  | SIZE: A4        |  | SHEET: 1/1                 |          |

**XGB** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.