

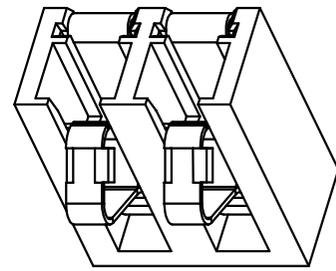






REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

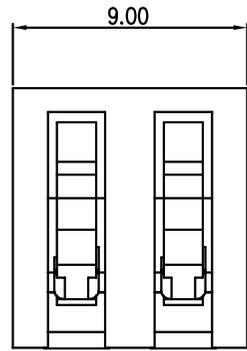

3D VIEW

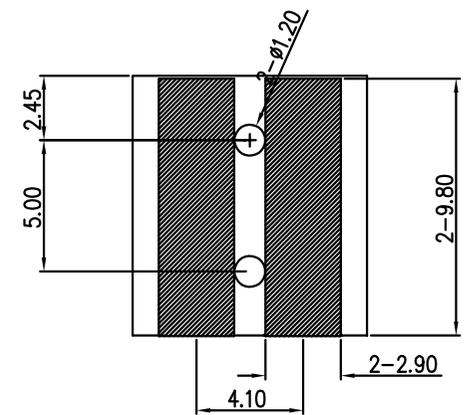

P.C.B LAYOUT  
TOP VIEW

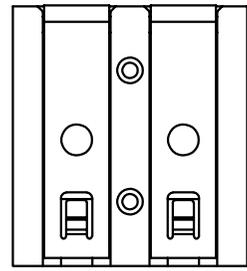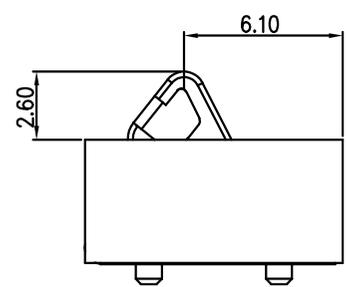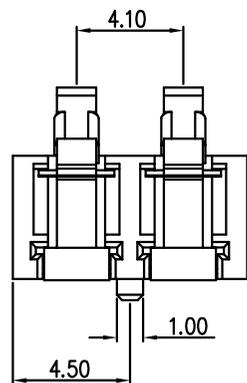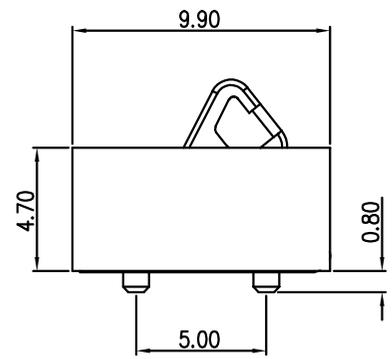

NOTES:

1. SPECIALITY:

- 1.1 Rated current: 0.5A
- 1.2 Rated voltage: 30V
- 1.3 Contact Resistance: 50mΩ MAX
- 1.4 Insulation Resistance: 100MΩ MIN 100V DC
- 1.5 Dielectric withstanding voltage: 100V AC.
- 1.6 Solder ability: 235±5℃, 5±0.5s.
- 1.7 Durability: 5000 Cycles Min.
- 1.8 Operating condition: Temperature: -30℃~+80℃  
Humidity: 80% R.H MAX

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:	ANGLES:		
DWG NO.	DESIGN:	DWG NO.	PART NAME:
	Kai		BATTERY 2PIN PH:5.0mm SMT TYPE
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	---
X.XXX	±0.10	X.XXX	---
DESIGN:	2018.03.29	CHECK:	/
APPROVED	Lucky	APPROVED	Lucky
	2018.03.29		
PART NO.	REV.	UNIT:	SHEET:
XB-BTJR0004-F02G1WR-A	A	mm	1/1

②	HOUSING	1	HIGHT TEMPERATURE PLASTIC		BLACK
①	CONTACT A	2	SUS301 T: 0.20	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK