

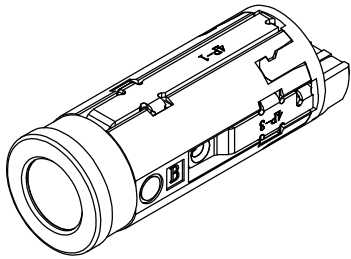

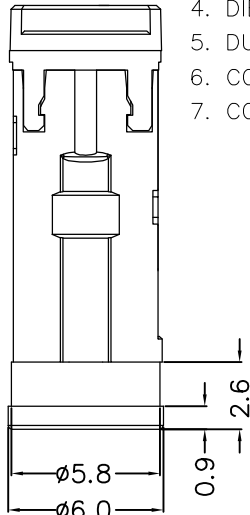





REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	04/26/19'

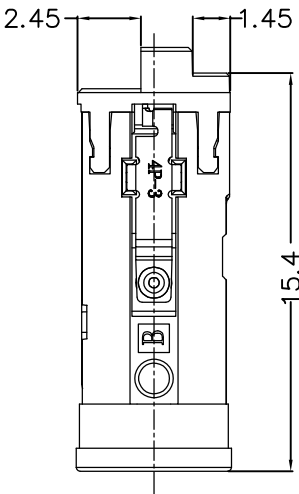

3D VIEW

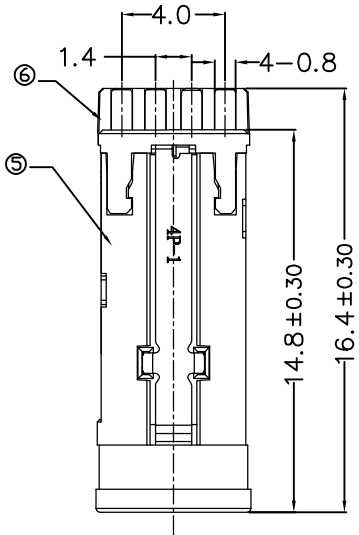

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

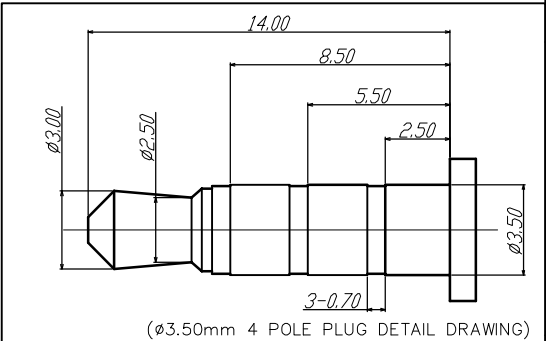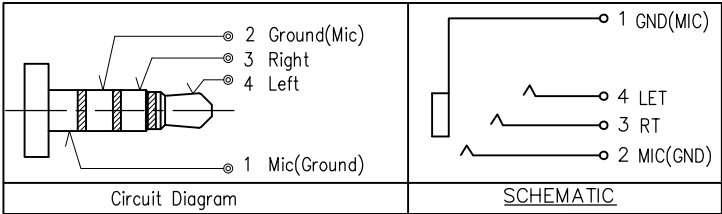

7	COVER	1	ENGINEERING PLASTIC;COLOR WHITE	
6	HOUSING	1	ENGINEERING PLASTIC;COLOR WHITE	
5	TERMINAL 5#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON CONTACT AREA	T=0.20mm
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL,TIN PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,TIN PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,TIN PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm
1	TERMINAL 1#	1		T=0.20mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.35	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		DWG NO.		PART NAME:	
		DESIGN:		PHONE JACK	
		CHECK:		PART NO.	
		APPROVED		XB-PJ35A092-F04S1BP-A	
REV.	UNIT:	SHEET:			
A	mm	1/1			