
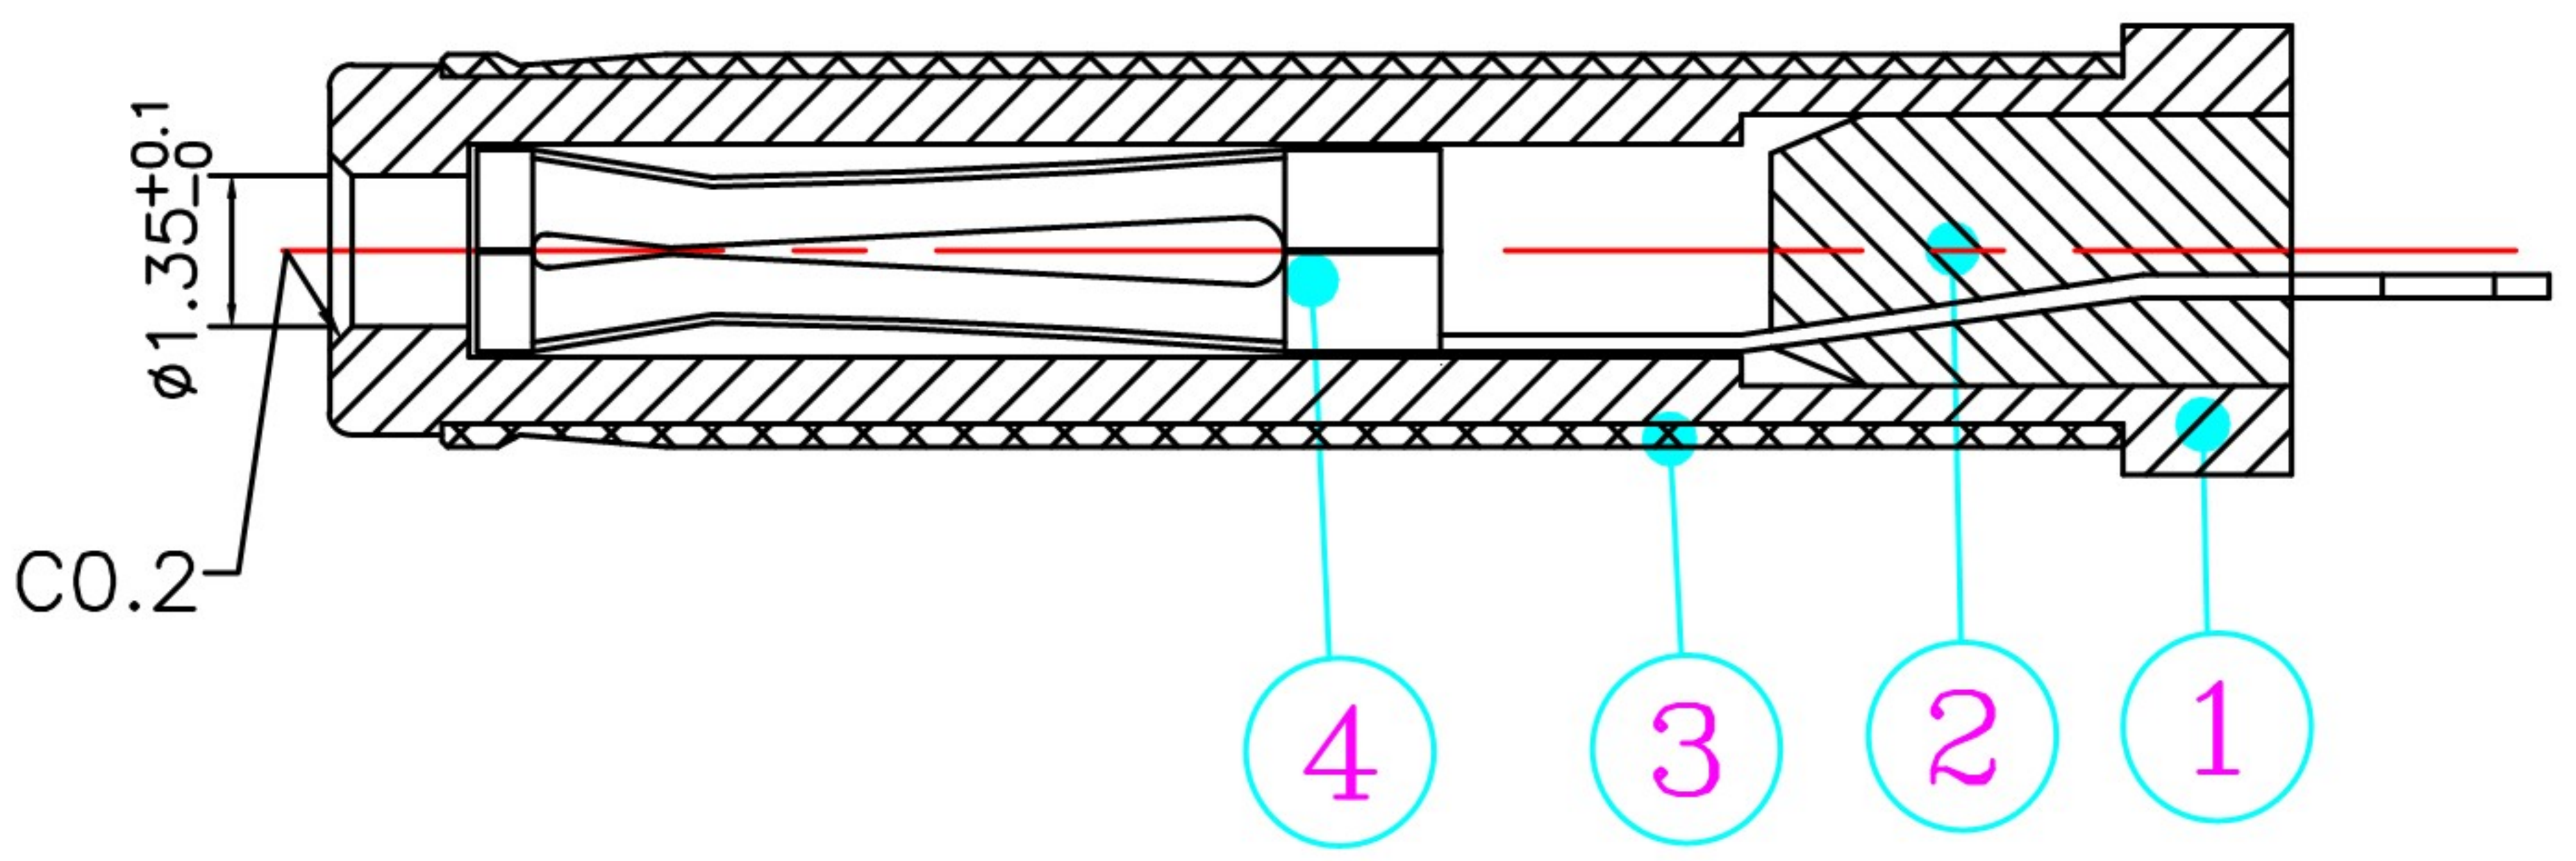


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20200514

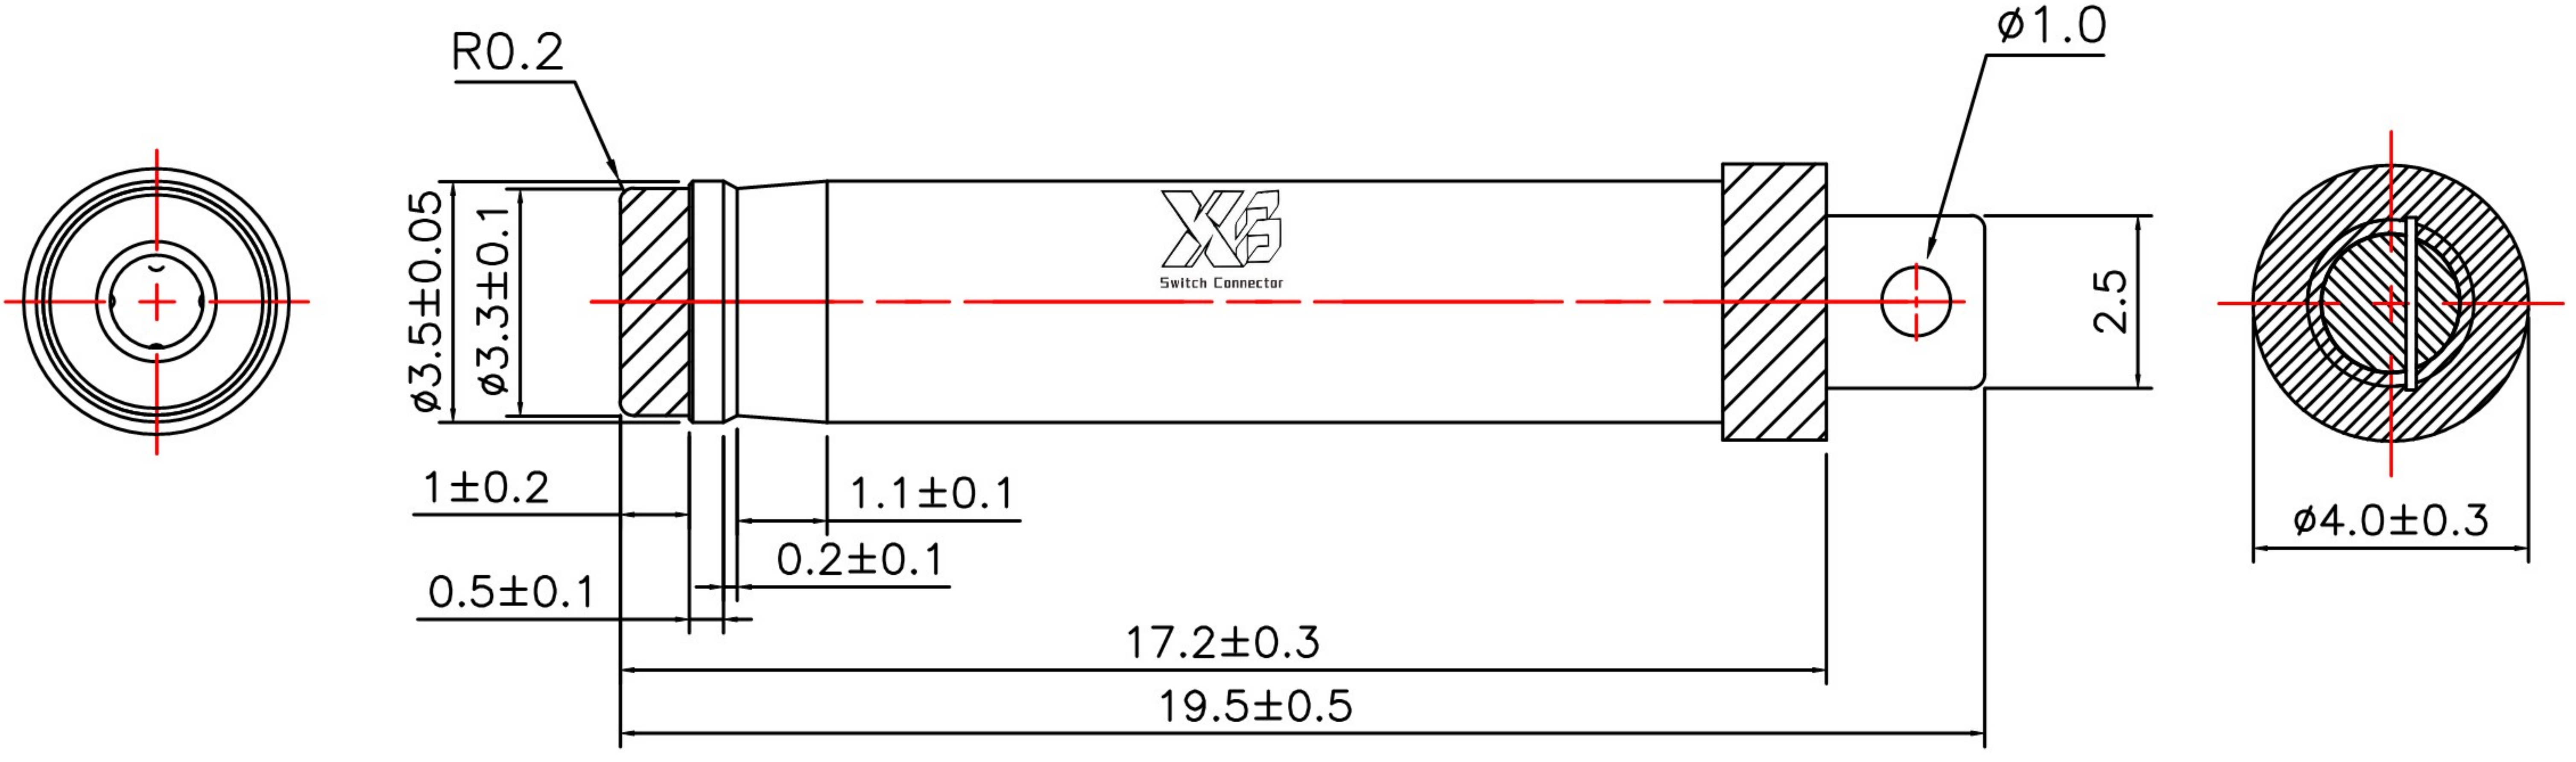

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
  - a:Insulation resistance: Above DC500V/100MΩ;
  - b:Endure voltage:AC500V at 1 minute;
  - c>Contact resistance:Under 30mΩ;
  - d:Rating: DC 30V 2A
- 3.Insertion force & withdrawal force:0.3–3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark \* is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	<b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD.	
比例 Scale	5:1	xx.:±0.3	6				June	杨义邦	李莹峰		
视图 Third angle projection		x.x:±0.1	5								
		.xx:±0.05	4	35135*18.5*0.2连续端子	C5191	Ni 1-3um				品名 P/N:	35135TV195
			3	3.48*15车沟管	H65	Ni 1-3um				图号 DRAWN NO:	CP-01-0051
			2	PLASTIC	POM	BLACK					
			1	PLASTIC	PA66	BLACK					
			NO.	PART	MATERIAL	PLATING					