
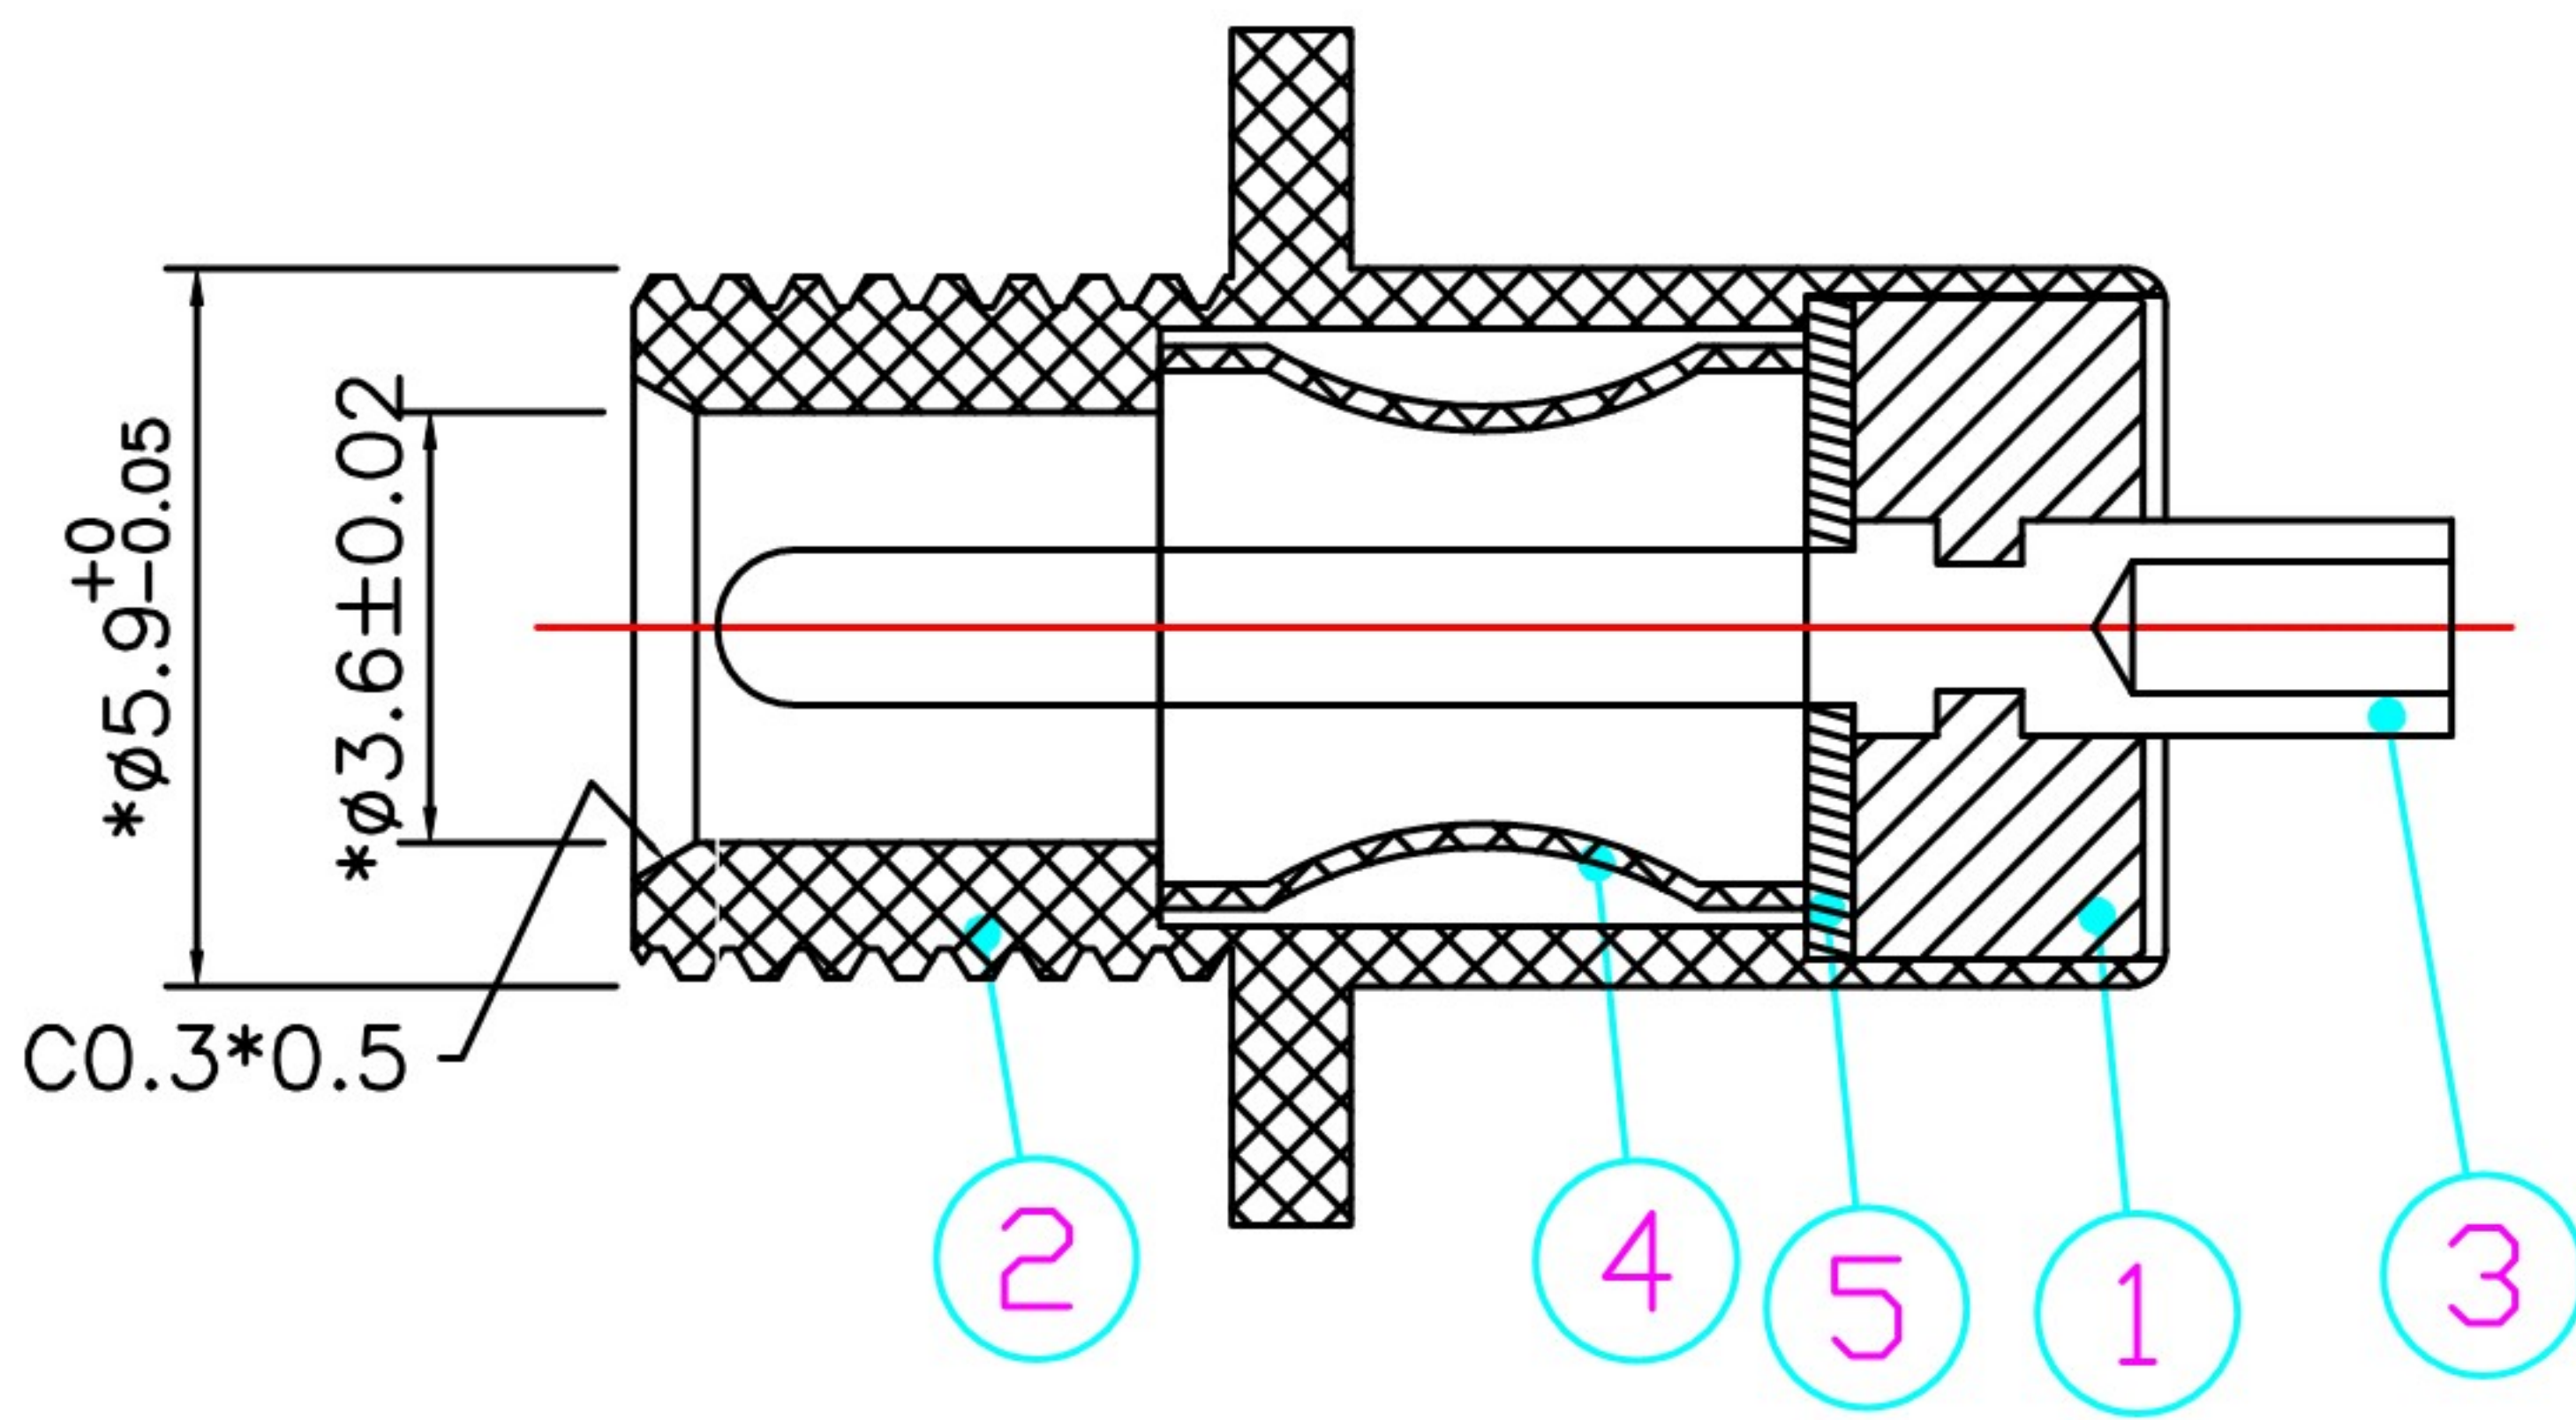
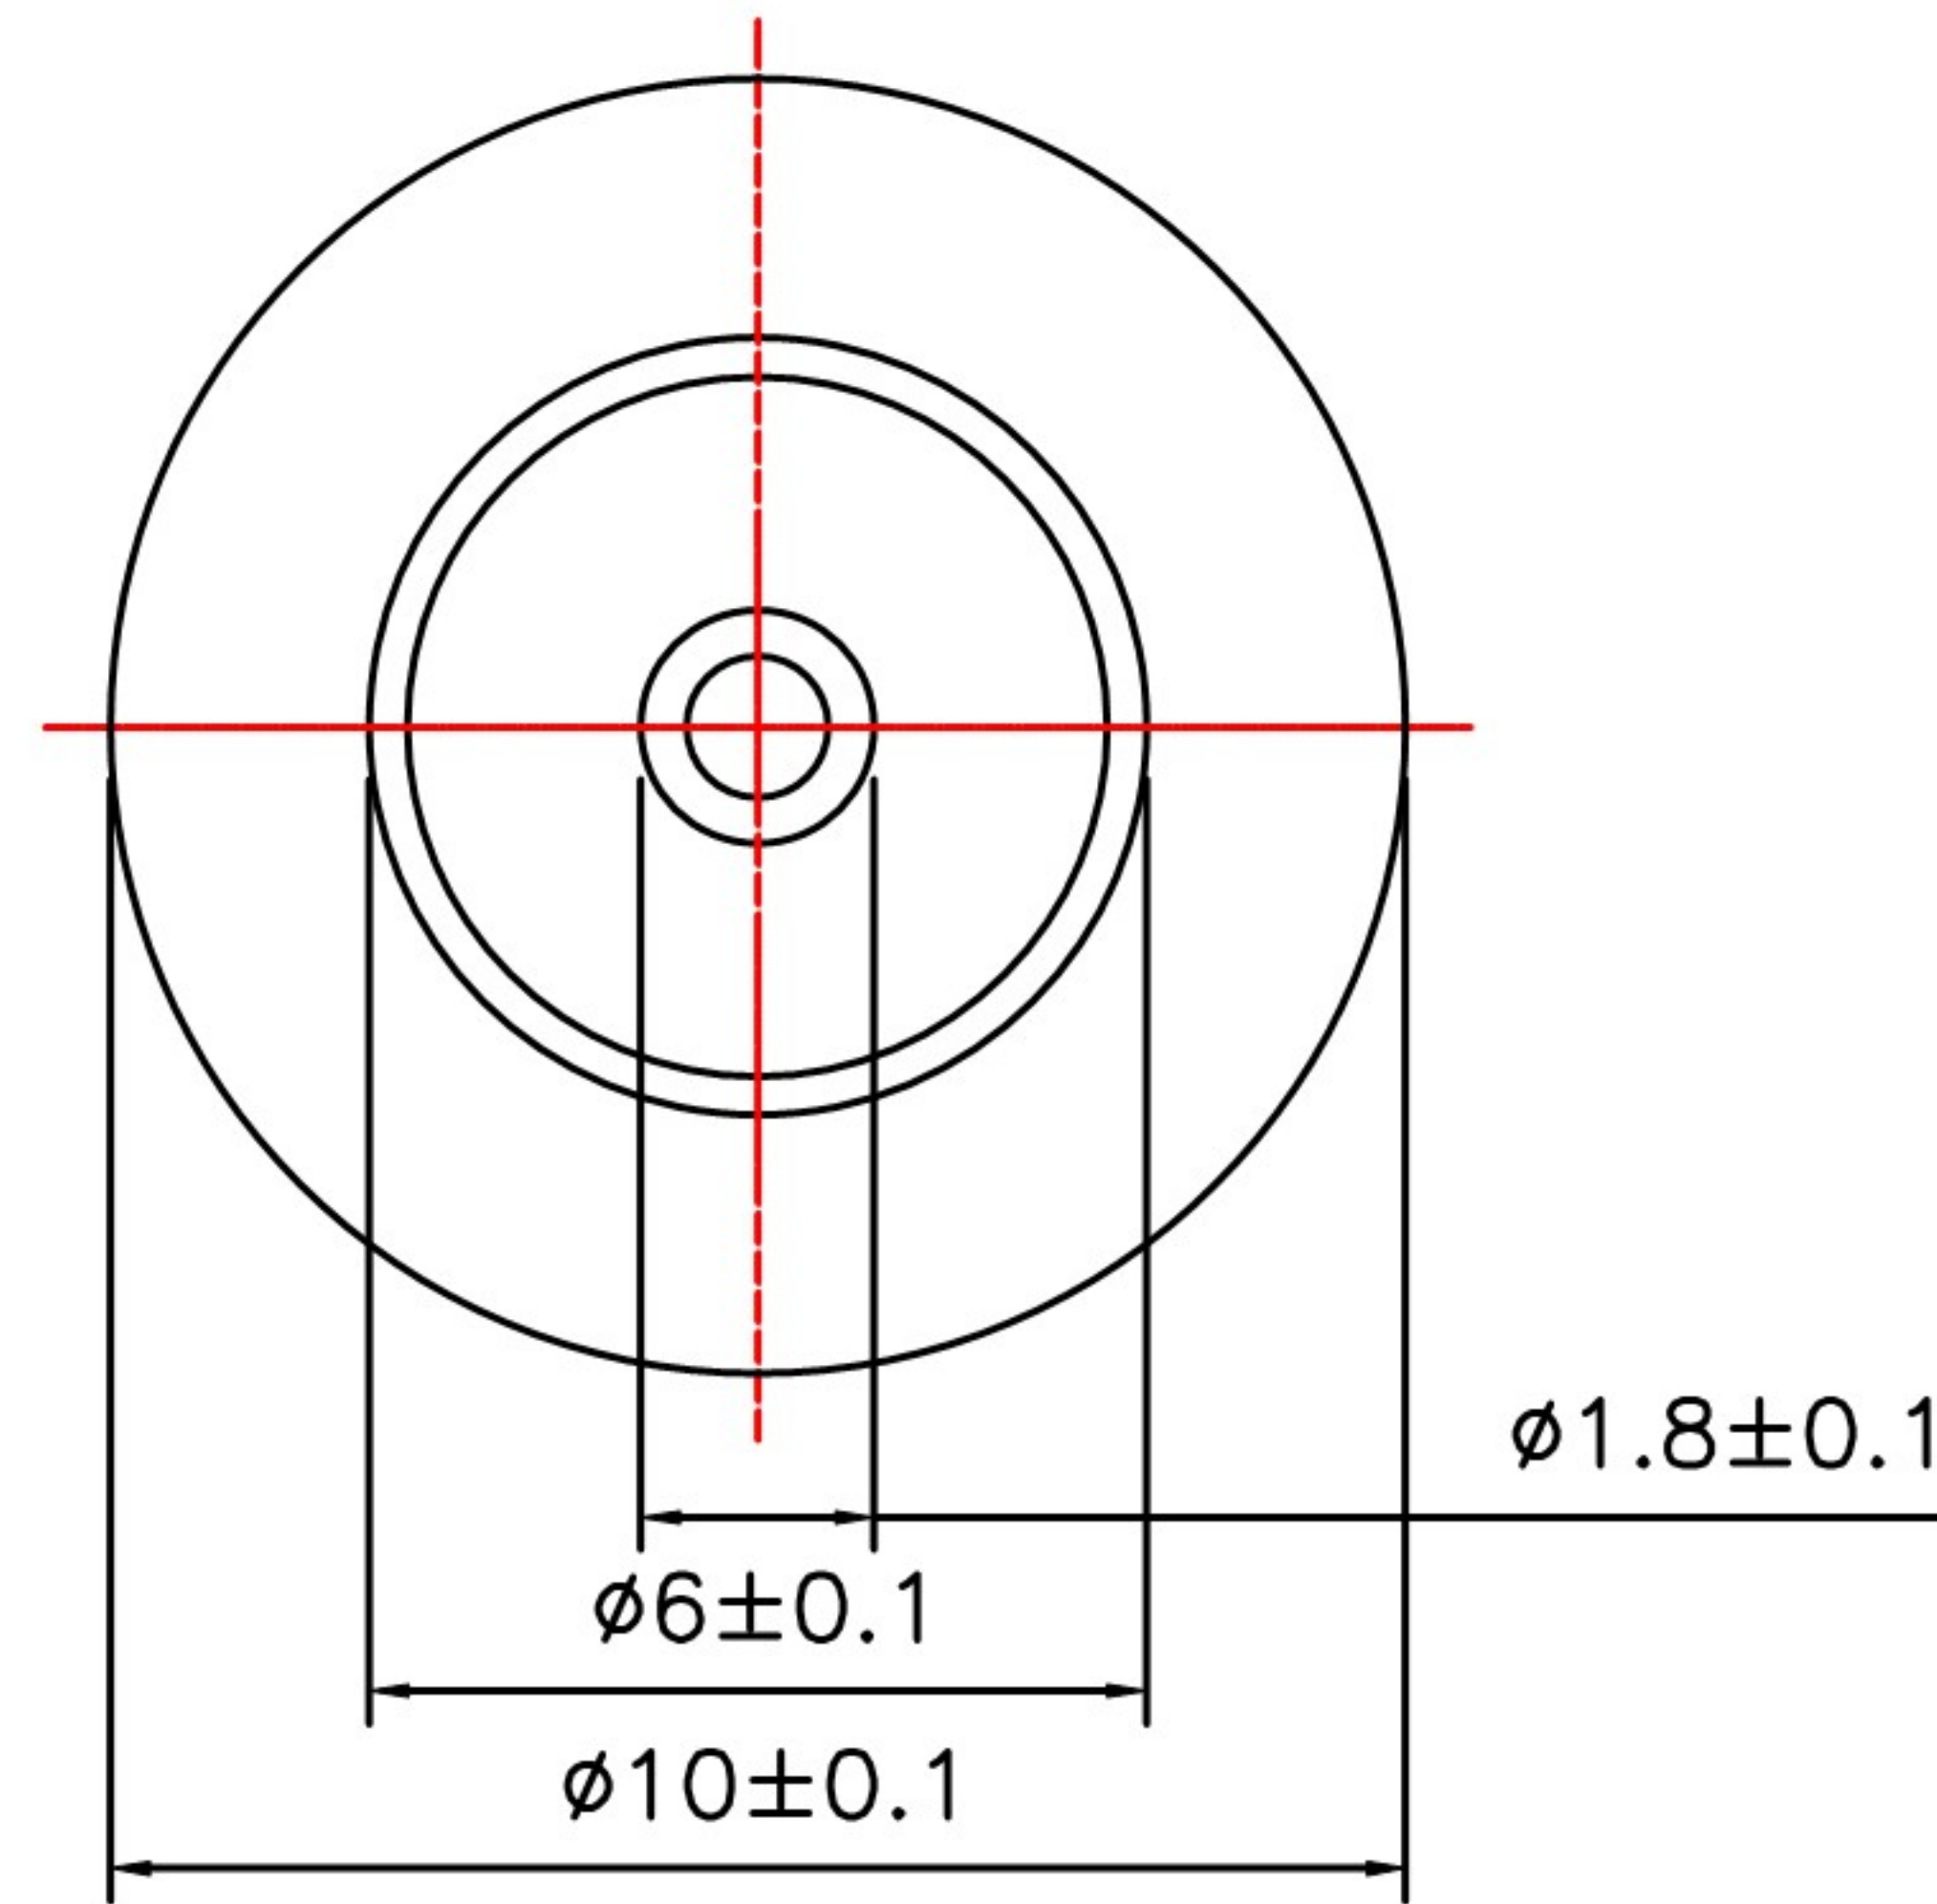
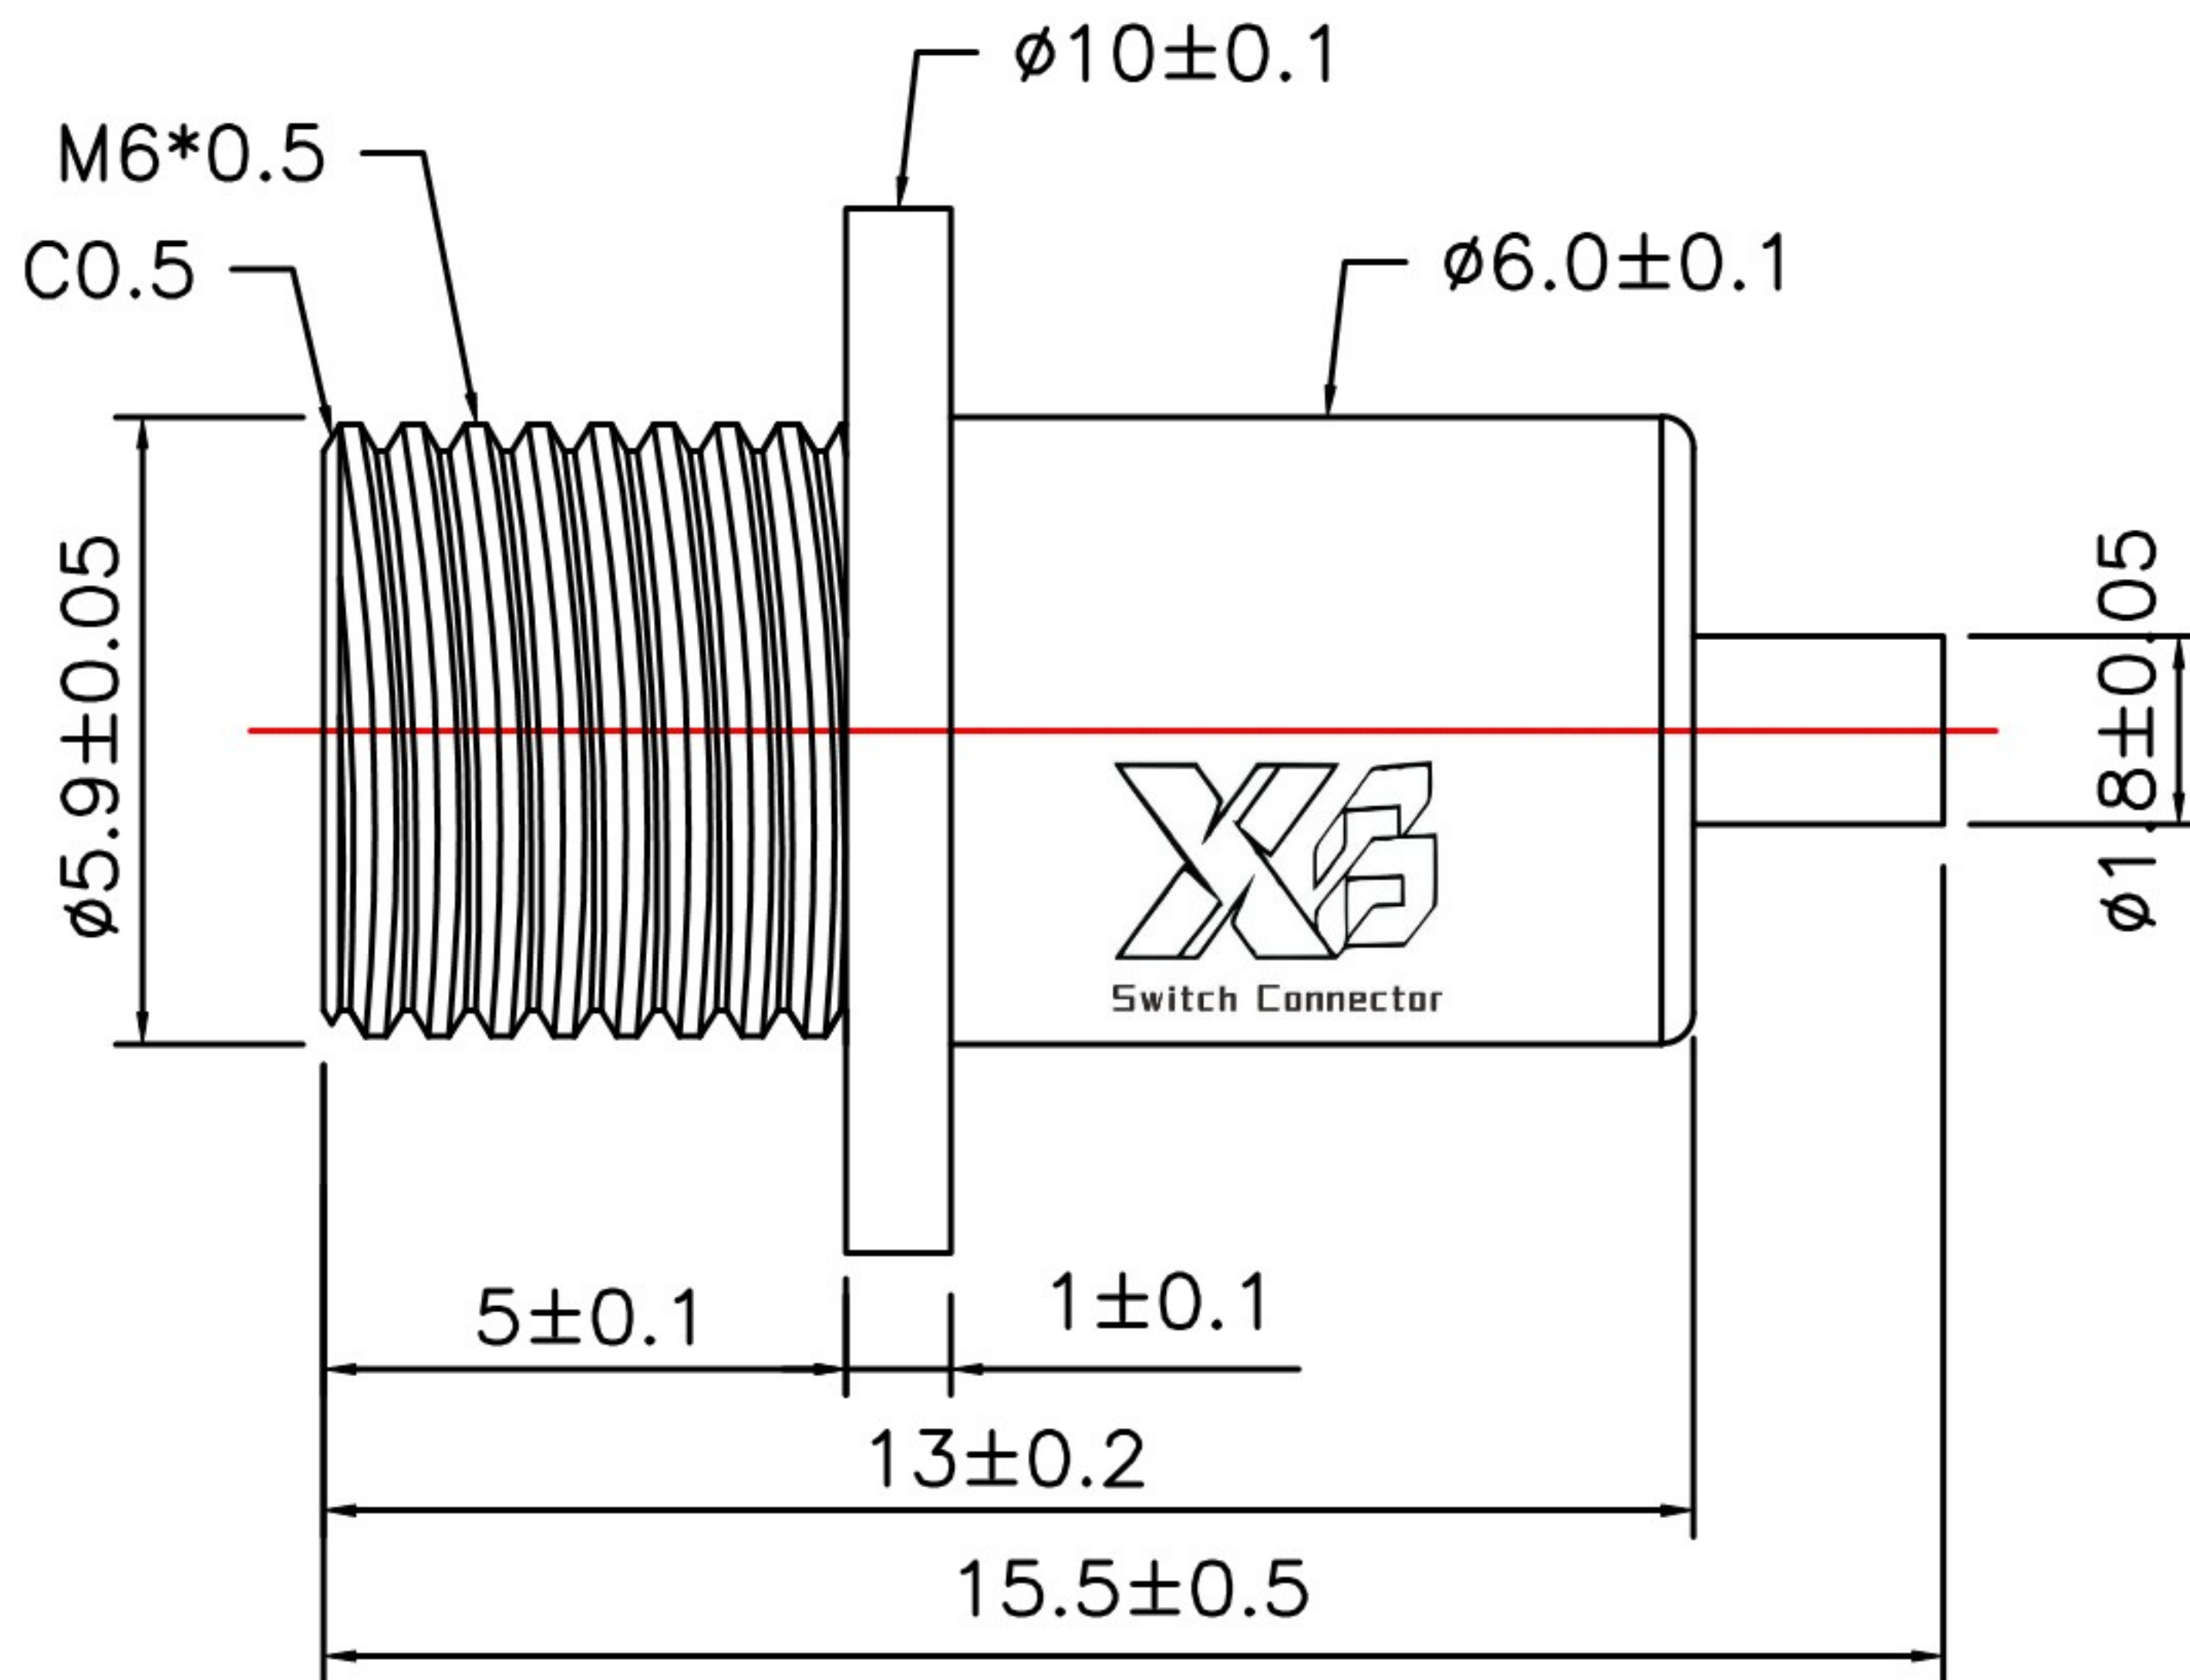


ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20200926

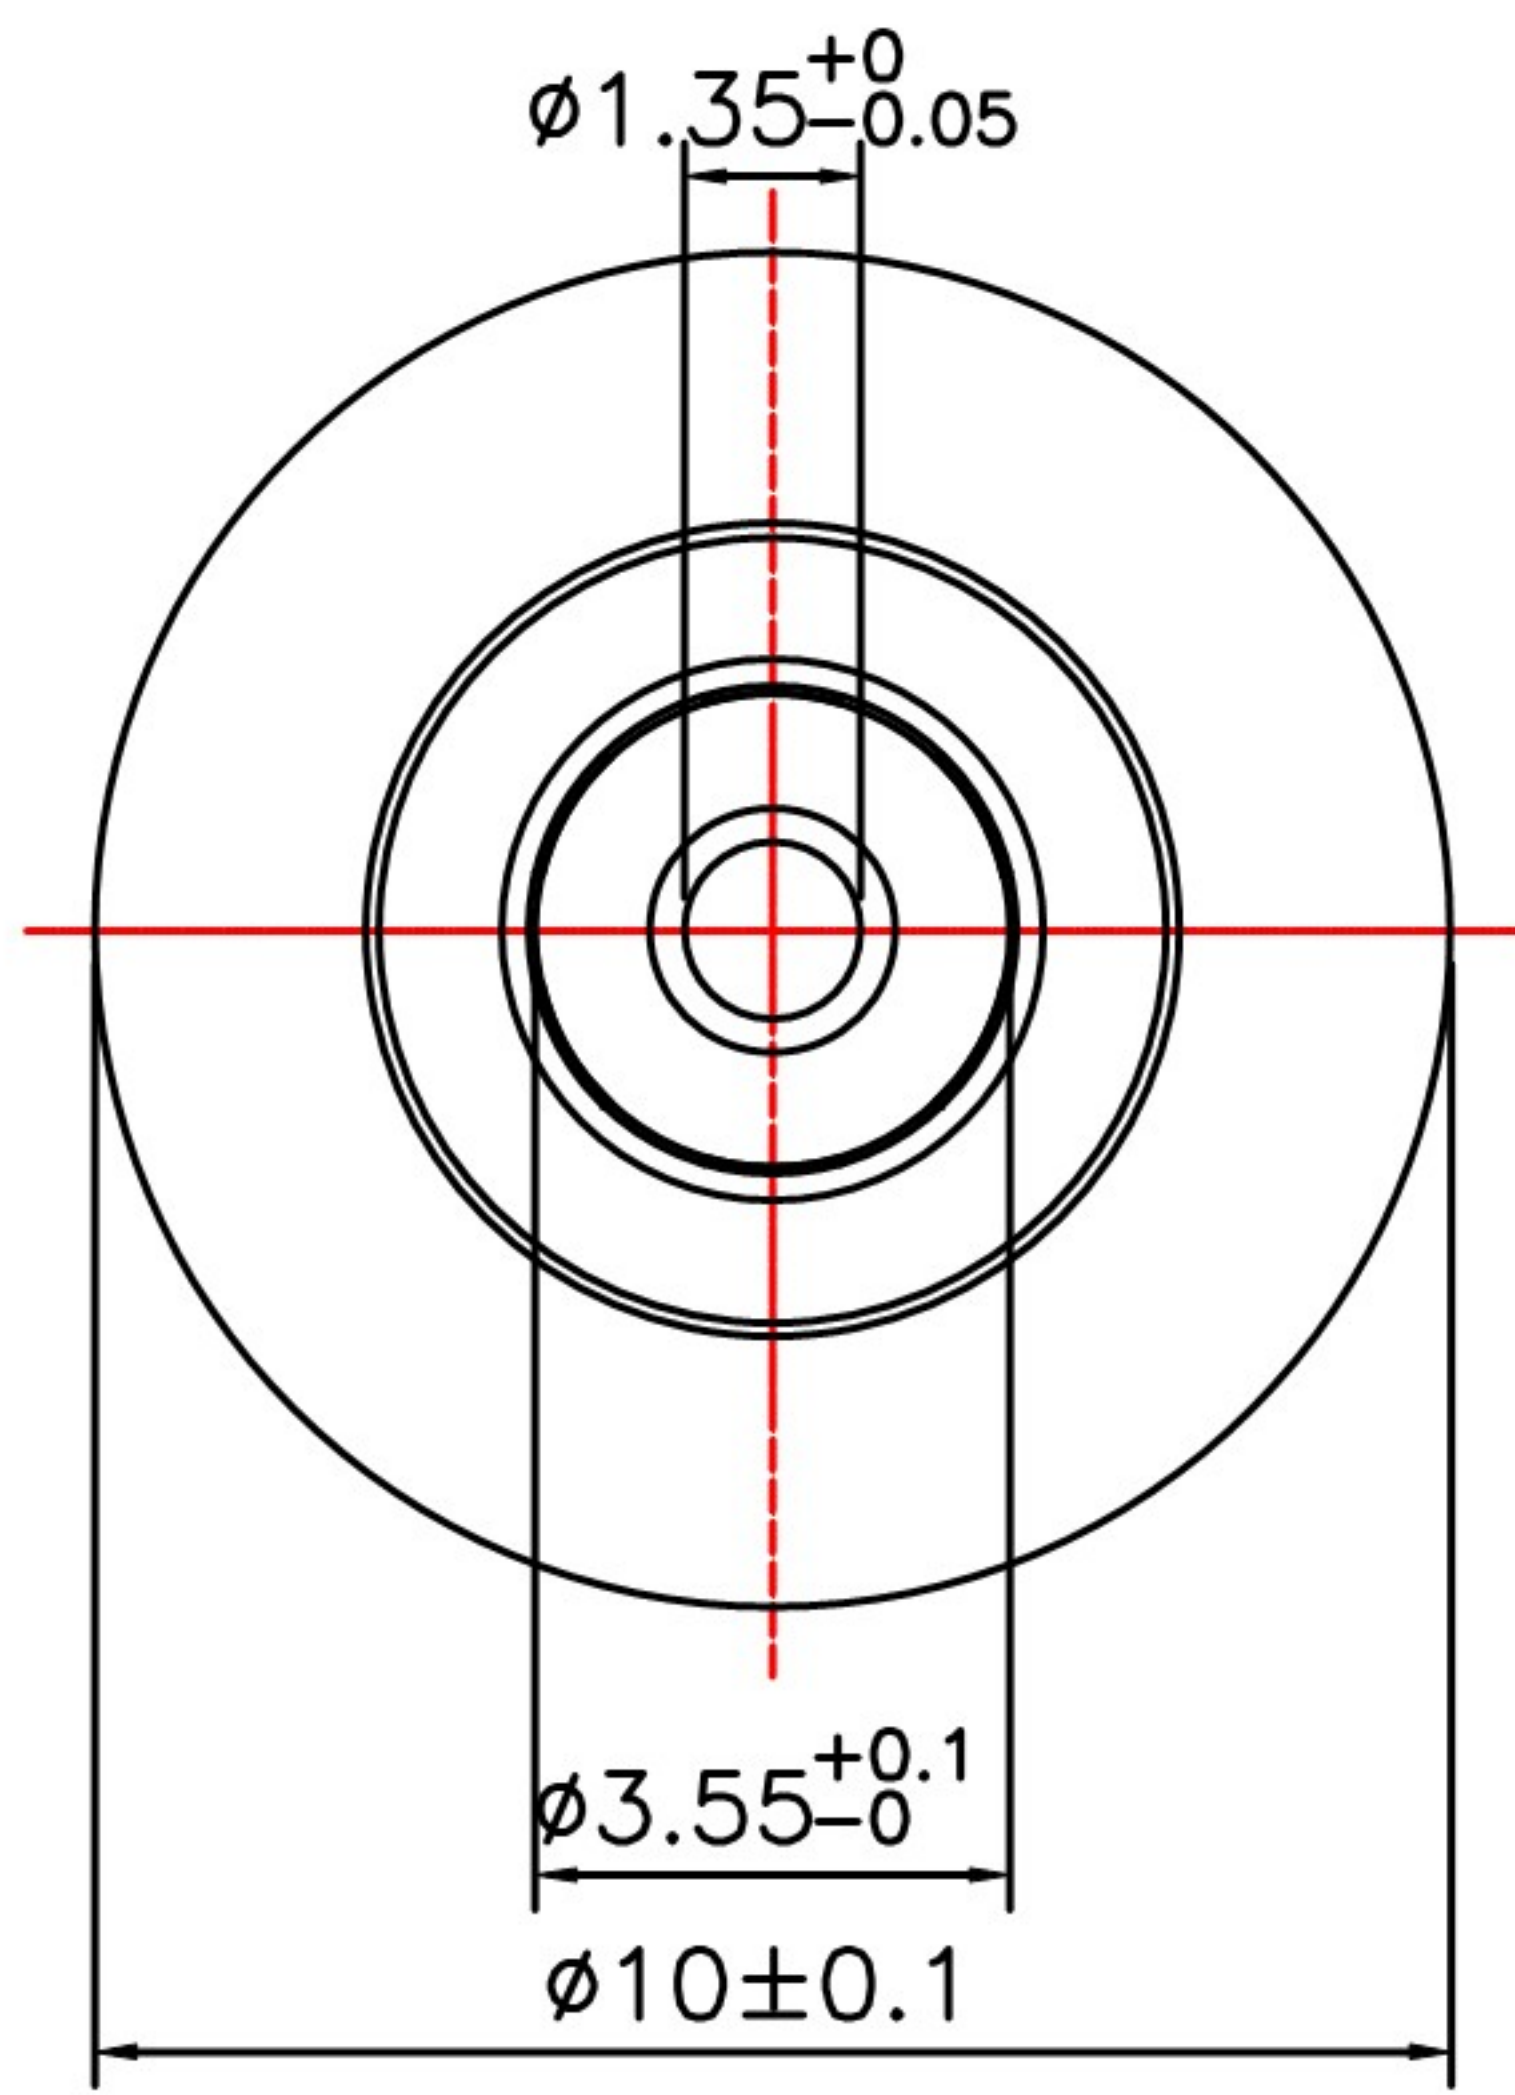

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c>Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3-3kgf.
- 4.Salt spray test:48H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
比例 Scale	5:1	xx.:±0.3	5	5.5*1.2*0.5硅胶垫			June	杨义邦	苏伟伦	规格 DESCRIPTION: DC JACK 3.5*1.35*15.5				
视图 Third angle projection		x.x:±0.1	4	4.7*5.4弹圈	C5191	Ni 1um-3um				品名 P/N: 35135J10M6防水				
			3	1.3*1.8*14.5针	C3604	Ni 1um-3um				图号 DRAWN NO: CP-04-0057				
			2	10*13*3.6*M6*0.5管	C3604	Ni 1um-3um								
		.xx:±0.05	1	PLASTIC	PA66	BLACK								
			NO.	PART	MATERIAL	PLATING								