

ROHS



Switch Connector

Ø0.8

2.2





版本 REV	修正标记 REV.LTR
V1.0	

修正前 BEFORE REVISION	
新版制定	

	修正后 AFTER REVISION

	簽 名 SIGN
	June

日期	DATE
20200321	

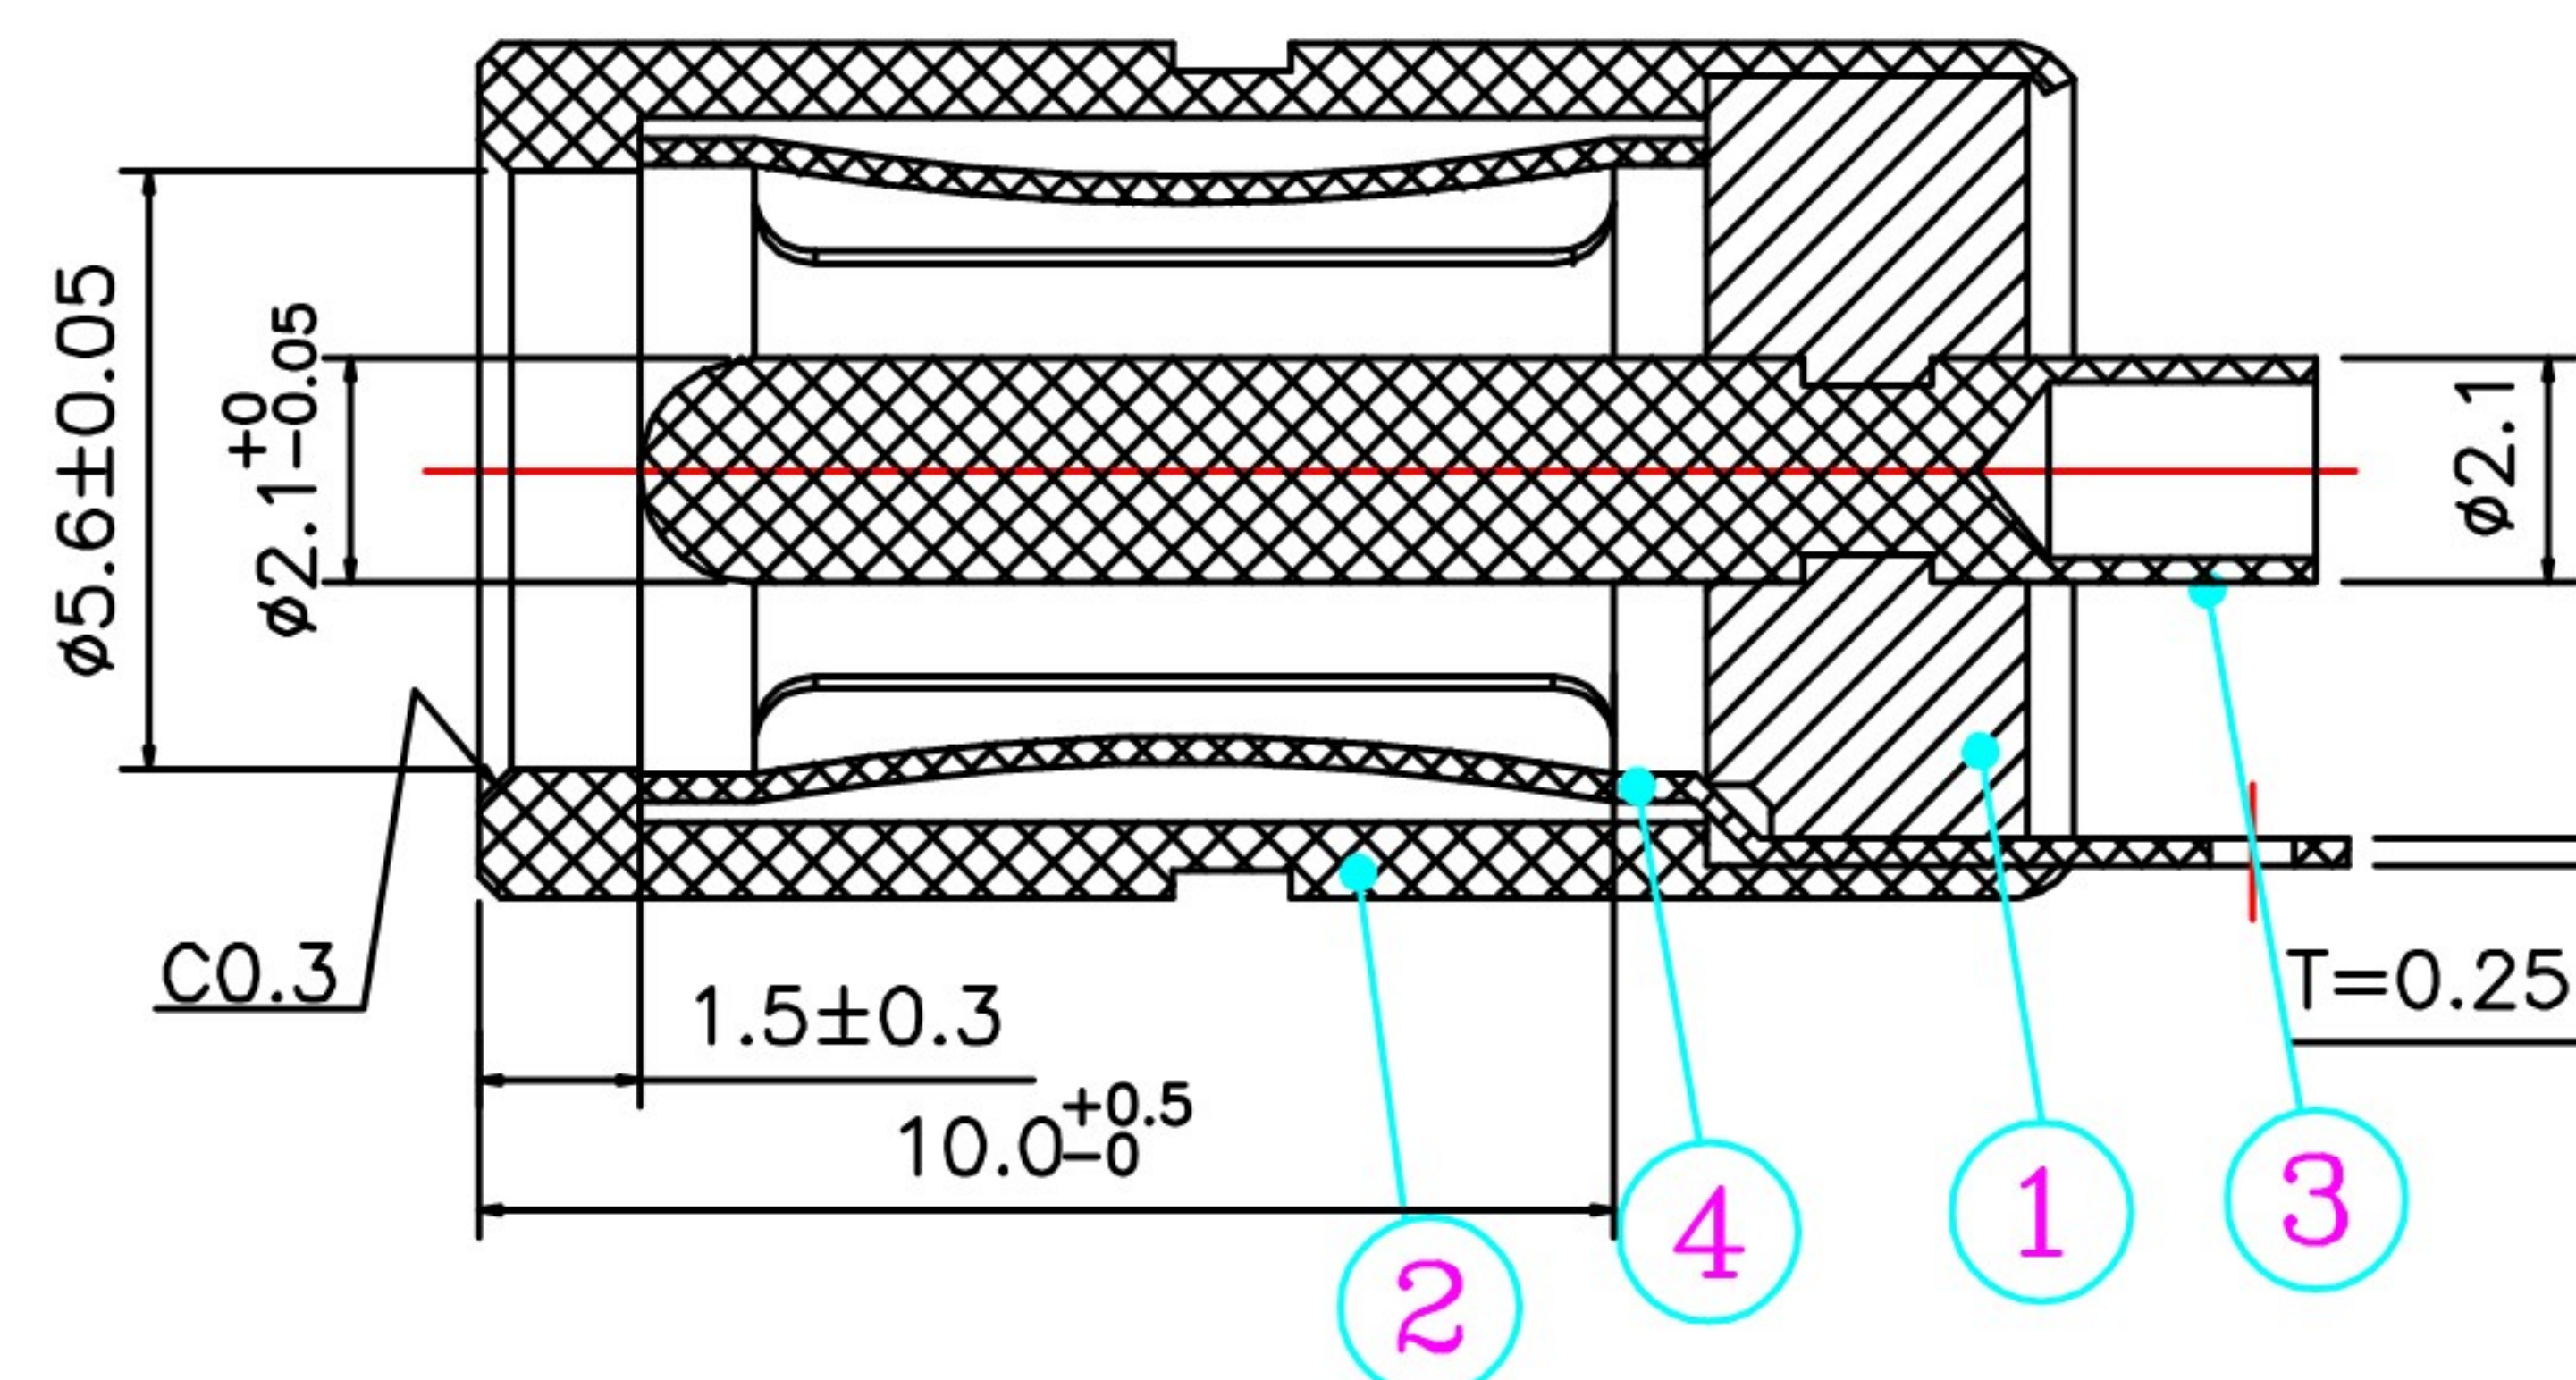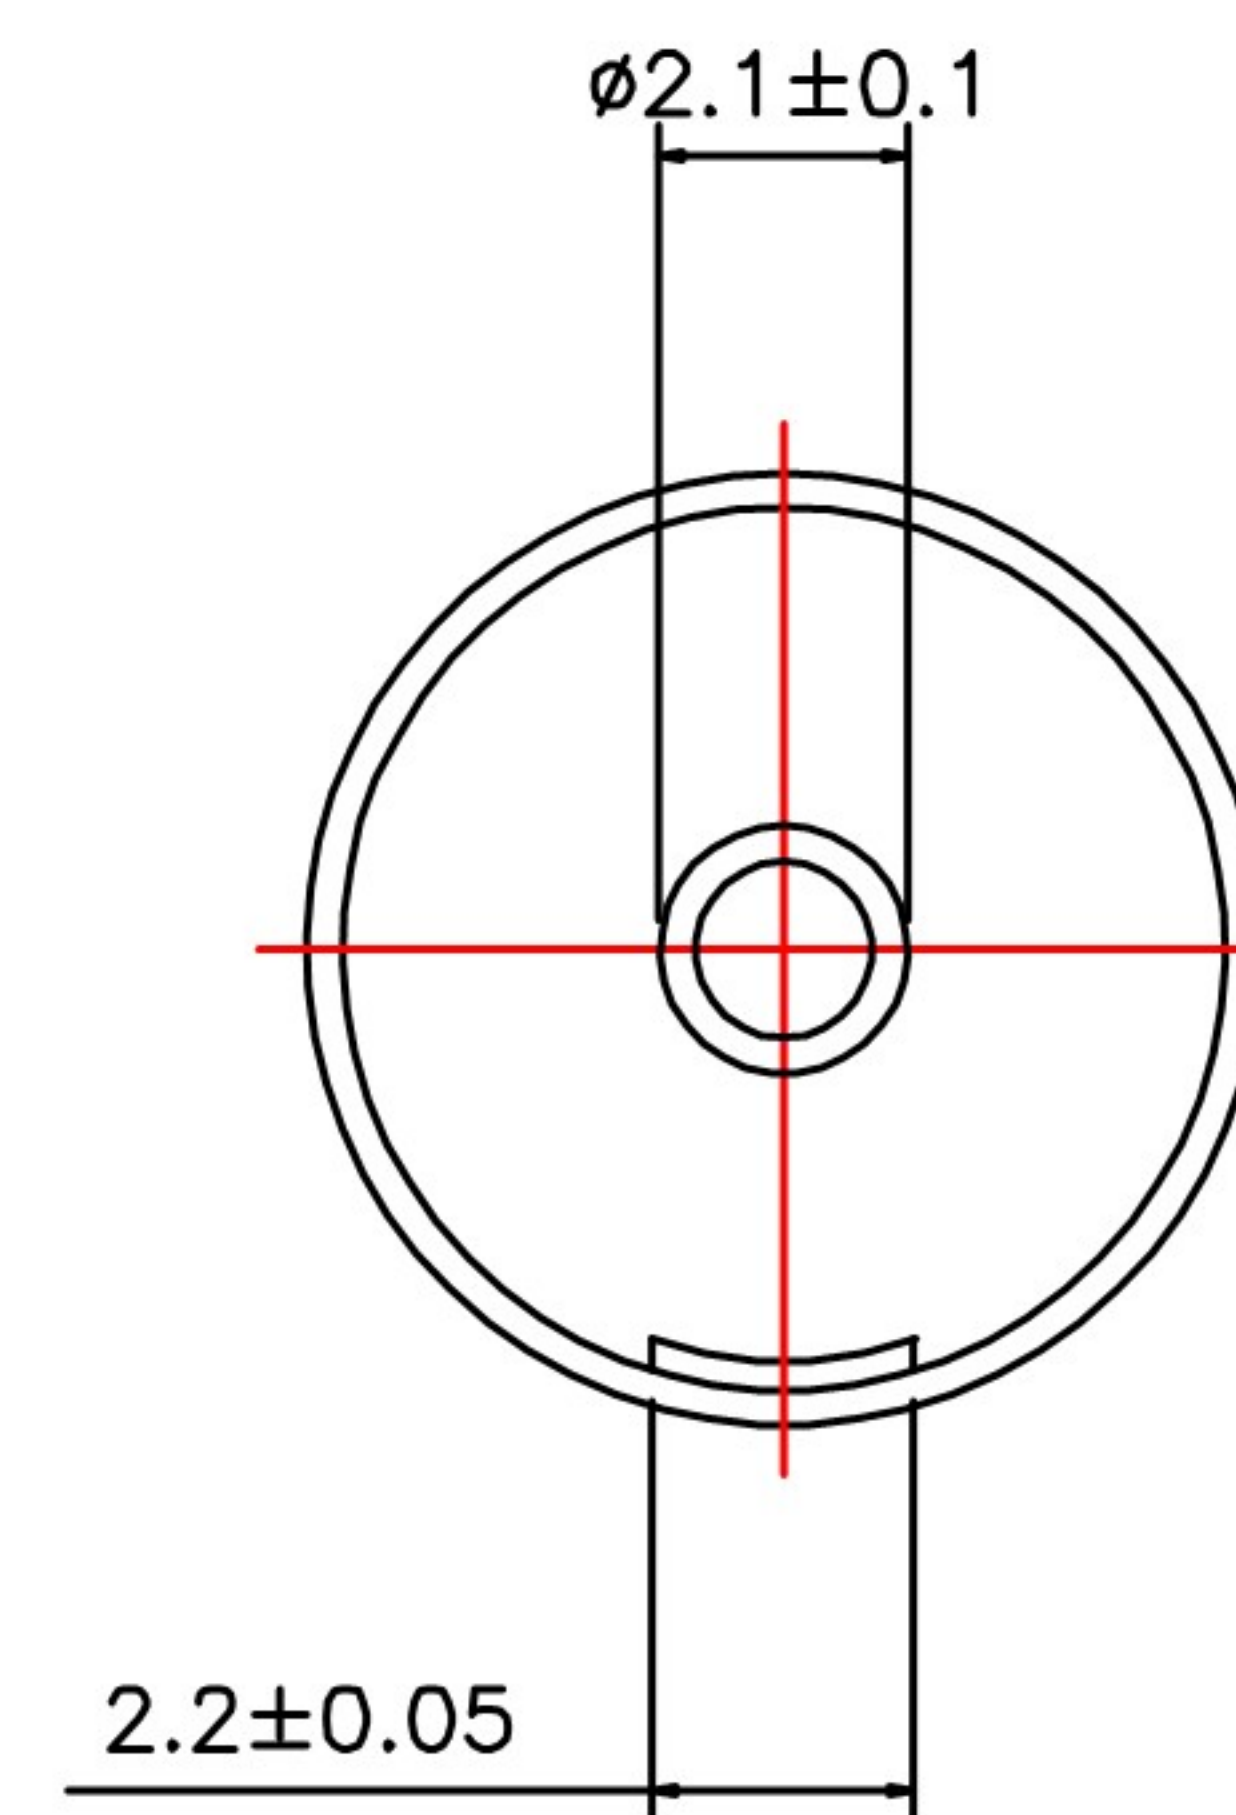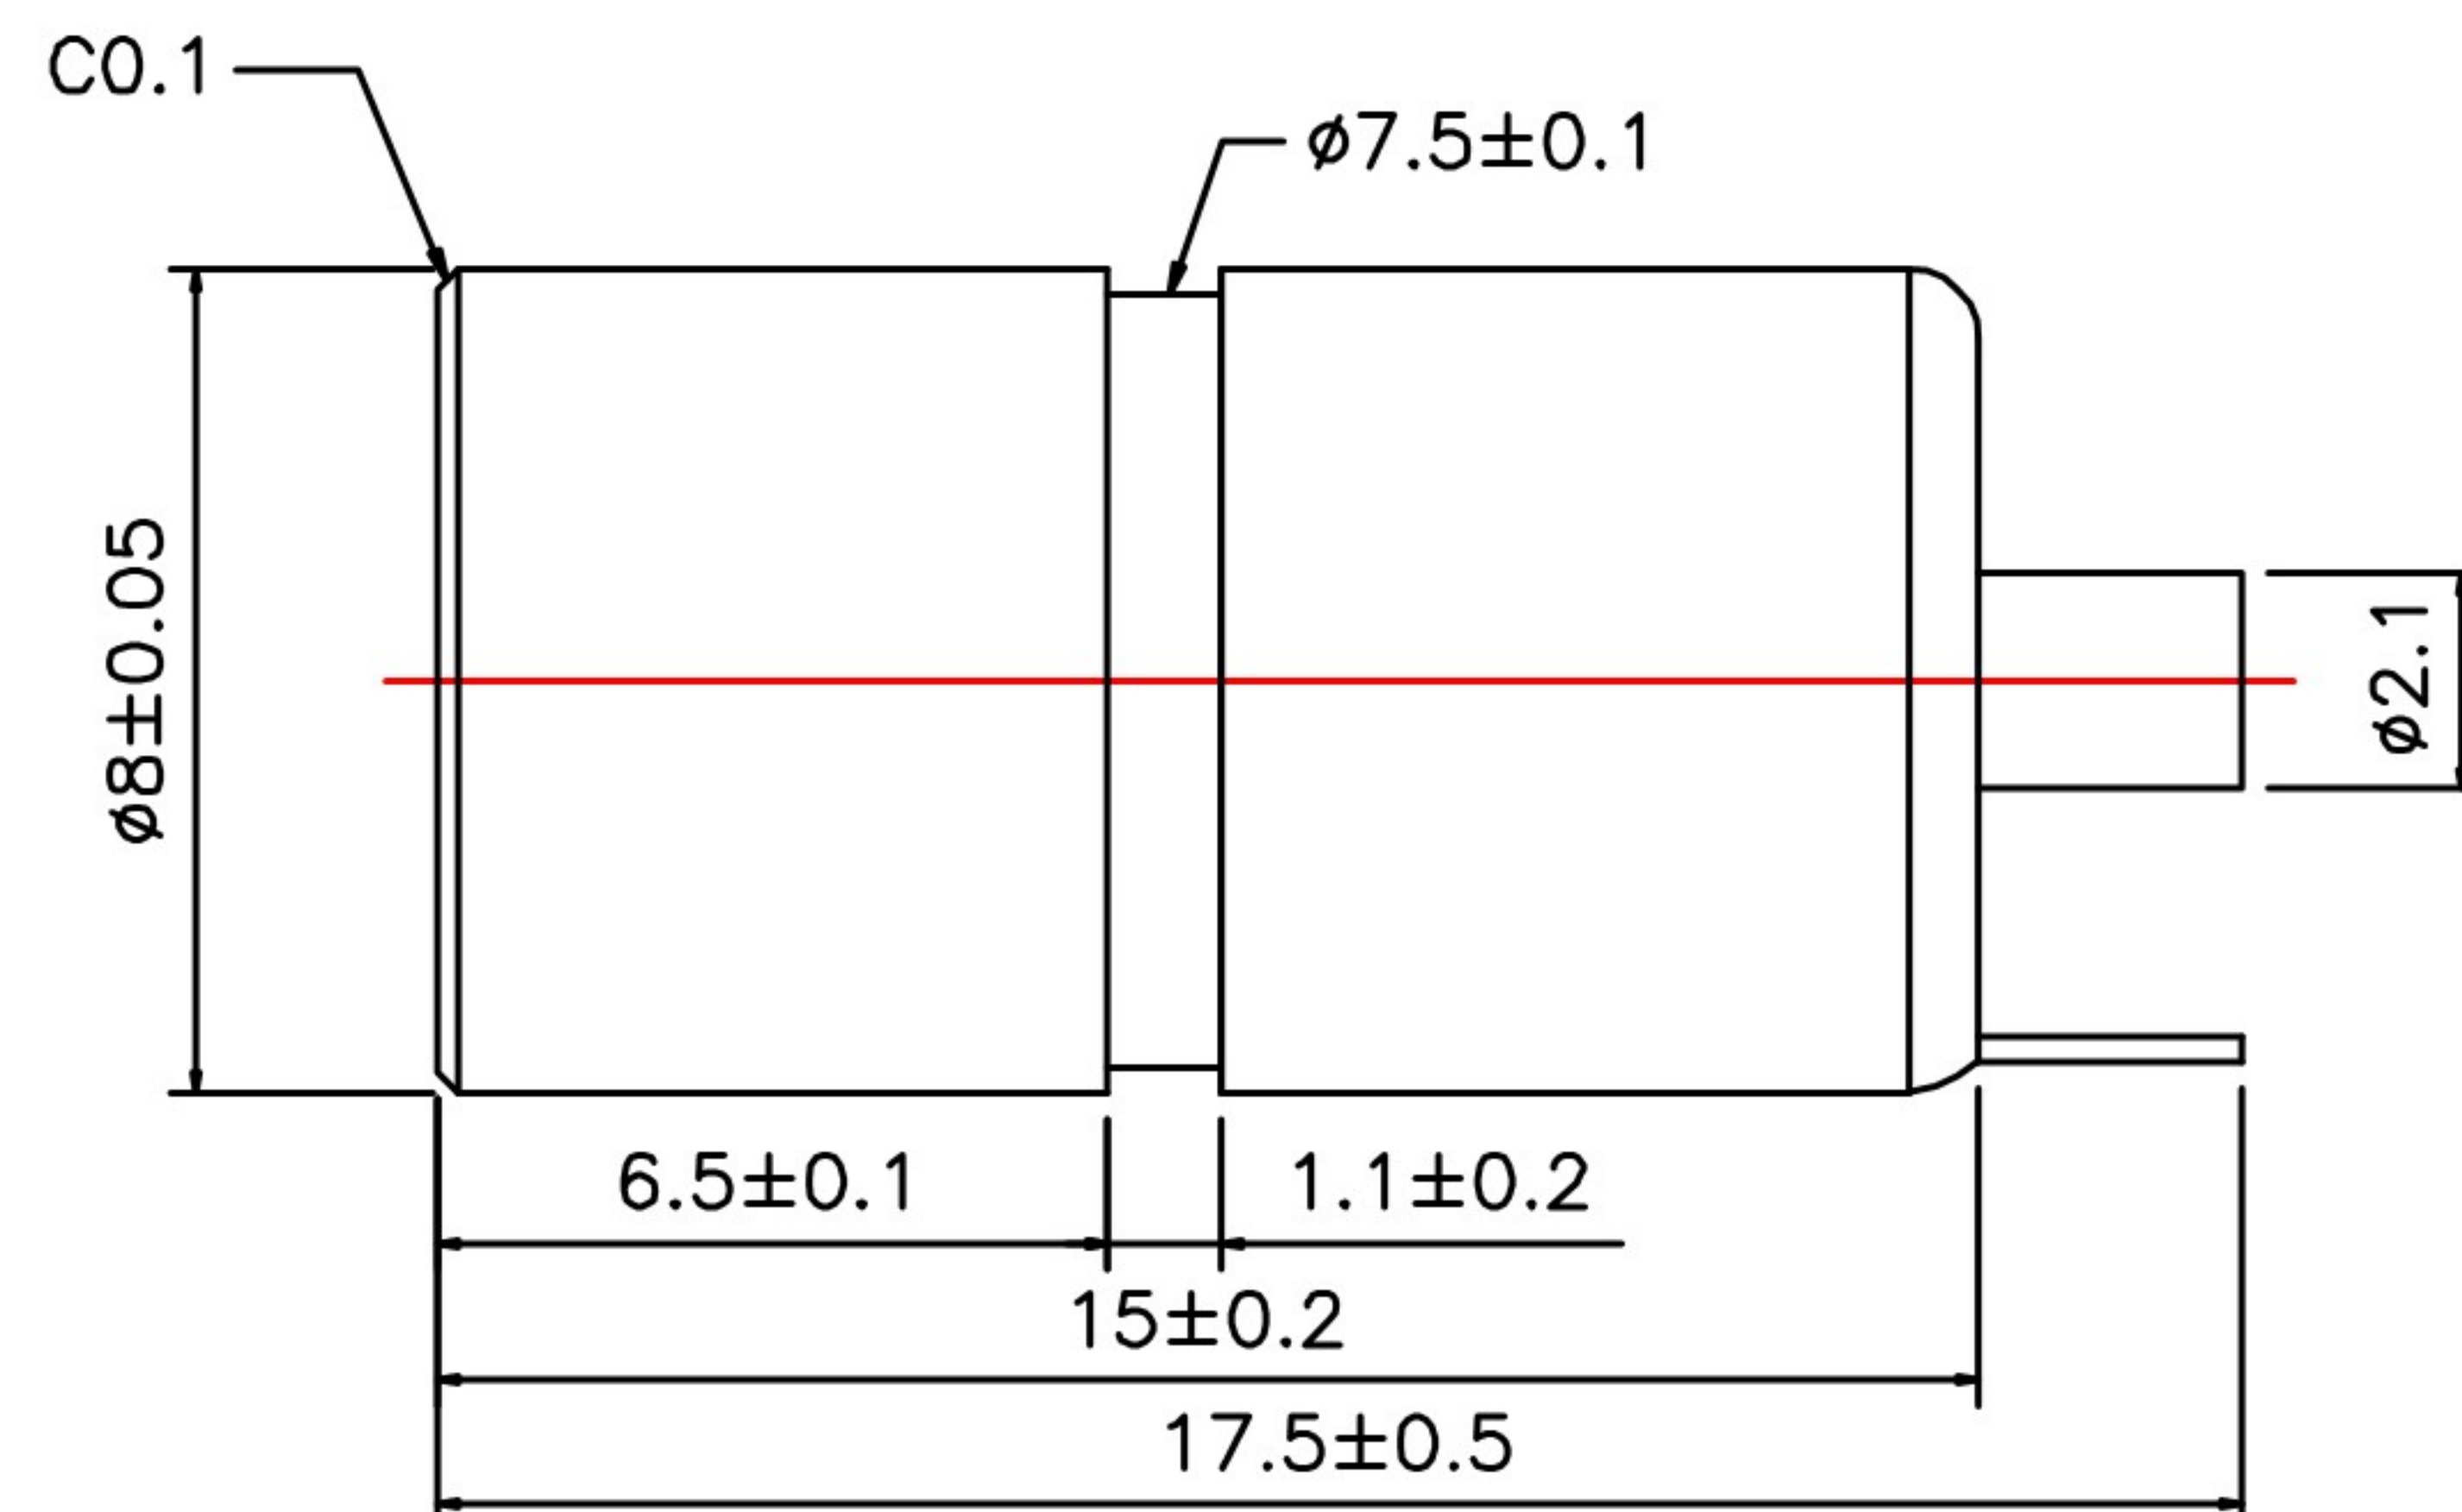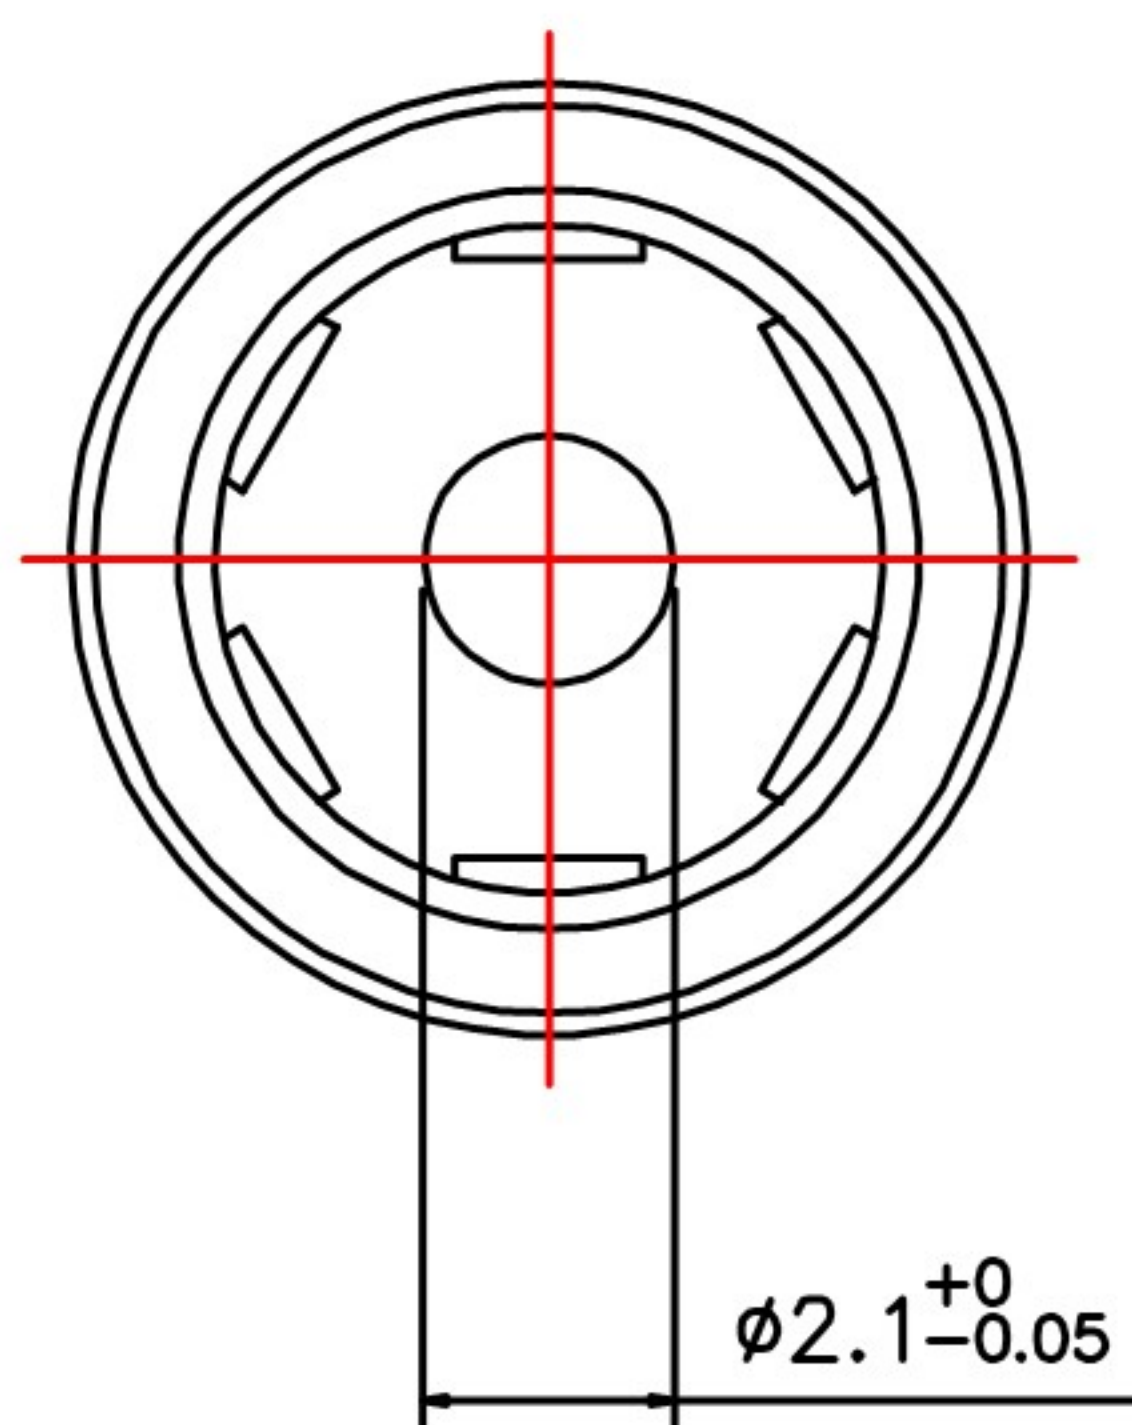

Technology Request:

1.Outlook:

No burr, no hurt.

2. Electronic performance:

a:Insulation resistance:

Above DC500V/100MΩ;

b:Endure voltage:

AC500V at 1 minute;

c:Contact resistance:


Under 30mΩ;

3.Insertion force & withdrawal force:
0.3–3kqf.

4.Salt spray test:72H.

5.Meet RoHS.

6. Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			
比例 Scale	5:1		xx.:±0.3	6		
		5				
视图 Third angle projection		x.x:±0.1	4	5521/5*6.6*0.25带尾弹圈	C5191	Ni 40~120μ
			3	2.08*16实心针	H62	Ni 40~120μ
		.xx:±0.05	2	8*15*6.6管	C3604	Ni 40~120μ
			1	PLASTIC	PBT+G15BK-V0	BLACK
			NO.	PART	MATERIAL	PLATING

核准
APPROVED

校对
CHECKED BY

制图
DRAWN BY



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格	DESCRIPTION:
----	--------------

DC JACK $\phi 5.5 * \phi 2.1 * 17.5$

品名	P/N:
----	------

5521JL80尾针2.1

图号 DRAWN NO:

CP-03-0156