
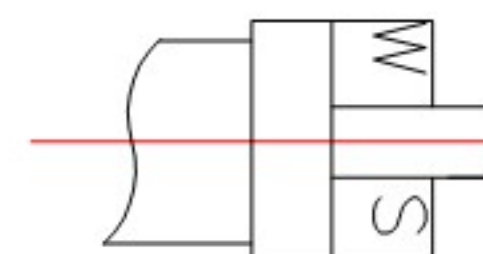
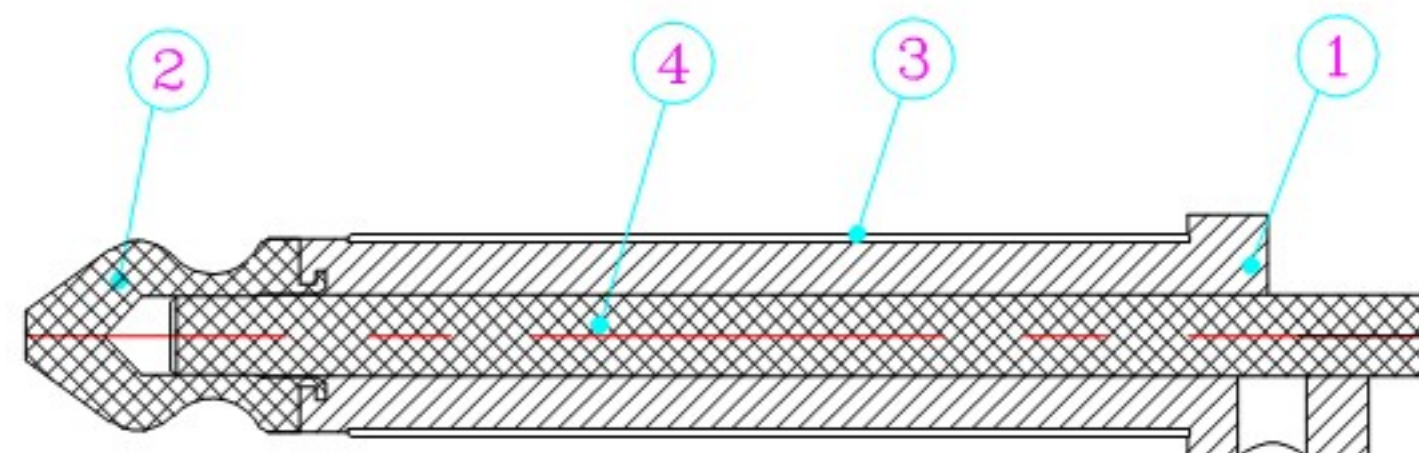


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

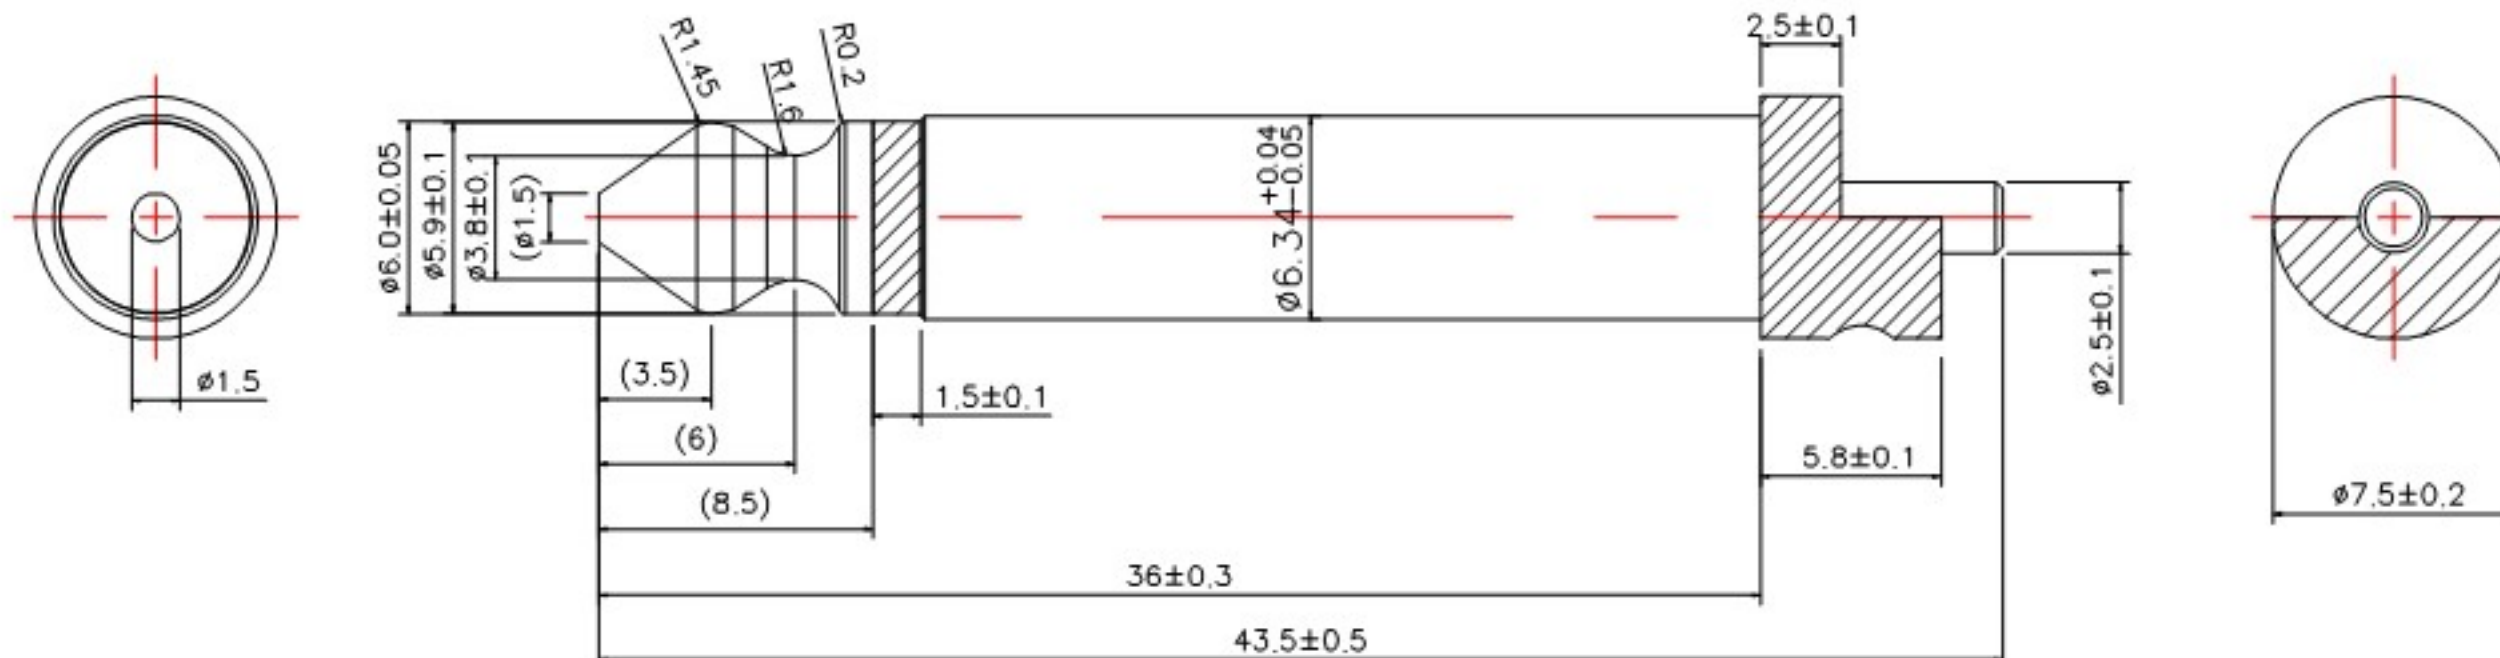

Technology Request:

1.Outlook:No burr, no hurt.

2.Electronic performance:

a:Insulation resistance: Above DC500V/100MΩ;

b:Endure voltage:AC500V at 1 minute;


c>Contact resistance:Under 30mΩ;

3.Insertion force & withdrawal force:0.3-3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
			6								
比例 Scale	5:1	xx.:±0.3	5			June	杨义邦	李莹峰		规格 DESCRIPTION:	6.3 AUDIO PLUG Ø6.3*43.5
			4	2.5*39铁棒	IRON/L1214					Ni 1um-3um	品名 P/N:
3	6.32*26*0.2直管		H65	Ni 1um-3um	图号 DRAWN NO:					CP-07-0004	
2	6*9.3R*		C3604	Ni 1um-3um							
1	PLASTIC		ABS	BLACK							
视图 Third angle projection		x.x.:±0.1									
		.xx.:±0.05	NO.	PART	MATERIAL	PLATING					

核准
APPROVED BY校对
CHECKED BY制图
DRAWN BY

June

杨义邦

李莹峰

规格 DESCRIPTION:

6.3 AUDIO PLUG Ø6.3*43.5

品名 P/N:

P63200435

图号 DRAWN NO:

CP-07-0004