
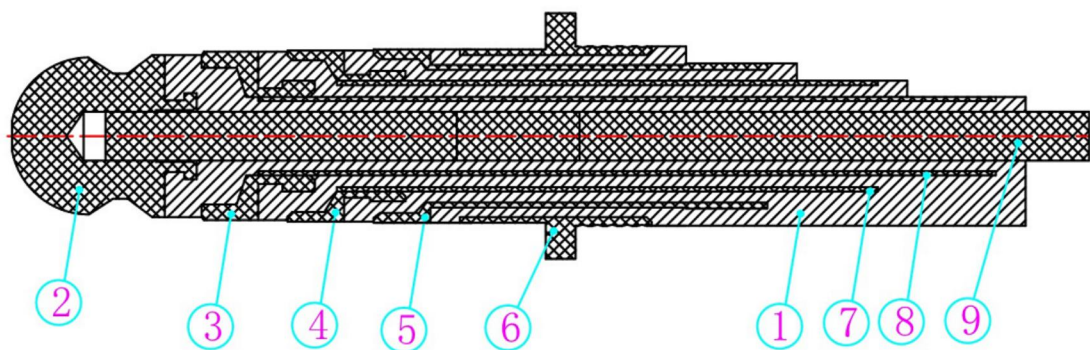


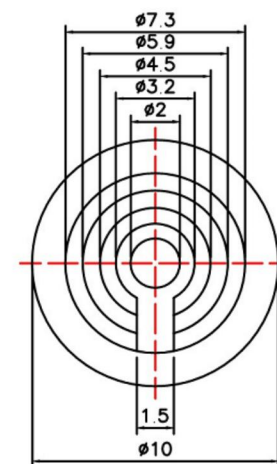

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
a:Insulation resistance:
Above DC500V/100mΩ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.4-4kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

PART NAME: PHONE JACK			
PART NO. XB-P71510438			
REV. A	UNIT: mm	SHEET: 1/1	