
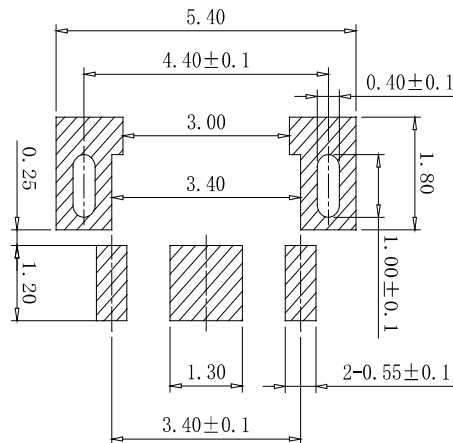


5.1 外形图:

REV (版本)	MARK (标记)	DESCRIPTION (描述)	DATE (日期)	APPROVED (批准)




P.C.B LAND DIMENSION


SPECIFICATION

1. Rating:DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. Operating force: 180gf±50gf
6. Operating life: 50,000 cycles



5	COVER(盖 板)		1	PHOSPHOR BRONZE		Ag plating
4	STEM(按 钮)		1	LCP		BLACK
3	CONTACT FORM(弹 片)		2	SUS		Ag plating
2	BASE(基 座)		1	LCP		BLACK
1	TERMINAL(端 子)		1	PHOSPHOR BRONZE		Ag plating
NO(序号)	PART NAME(部件名)		QTY(数量)	MATERIAL(材料)		REMARK(备注)
DRAWN 制 图	QW. HONG	DATE 日期	2011. 11. 14	SCALE: 10:1 比 例	ITEM 产 品 类 型	TACT SWITCH 轻触开关
CHKD 审 核	GF. YANG	DATE 日期	2011. 11. 14	VIEW: 视 图	PART NO 型 号	THAM05-BB2
APVD 批 准	G.J. ZHAO	DATE 日期	2011. 11. 14	UNIT:mm 单 位	DWG. NO 图 号	J1. 5003. 00-000



CIRCUIT DIAGRAM

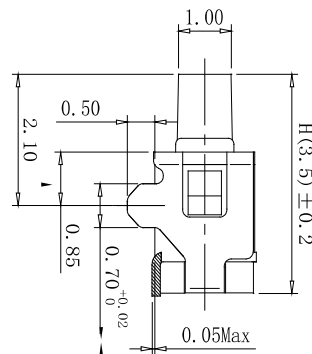

REFERENCE DRAWING

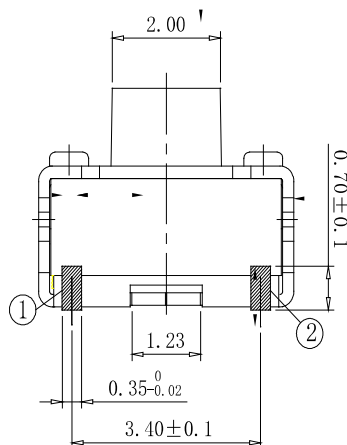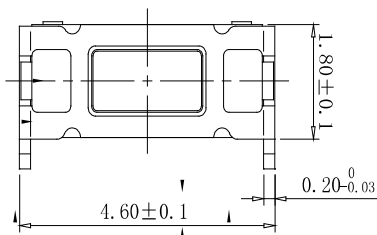

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNSPECIFIED TOLERANCE 未指定的公差	
ANGULAR(角度)	$\pm 0.5^\circ$
$16 < L \leq 63$	± 0.4
$4 < L \leq 16$	± 0.3
$L \leq 4$	± 0.2