
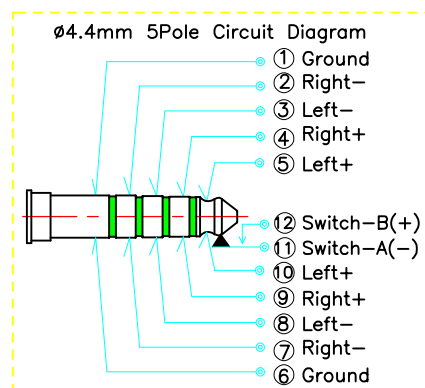
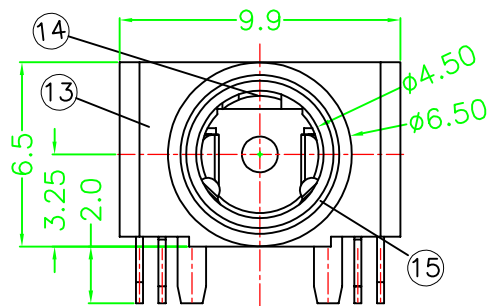
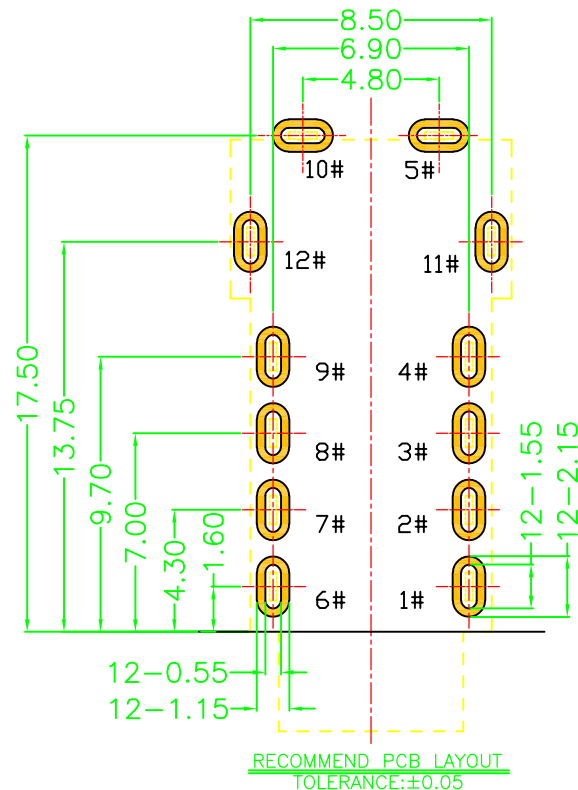
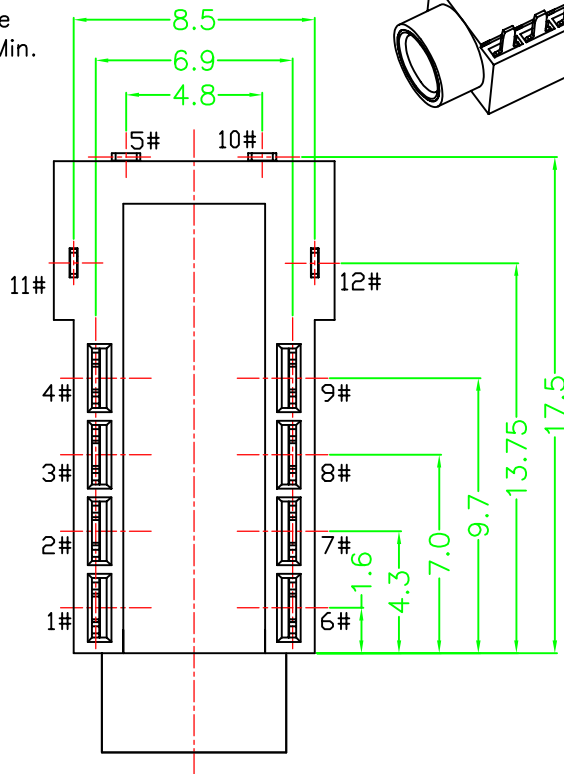
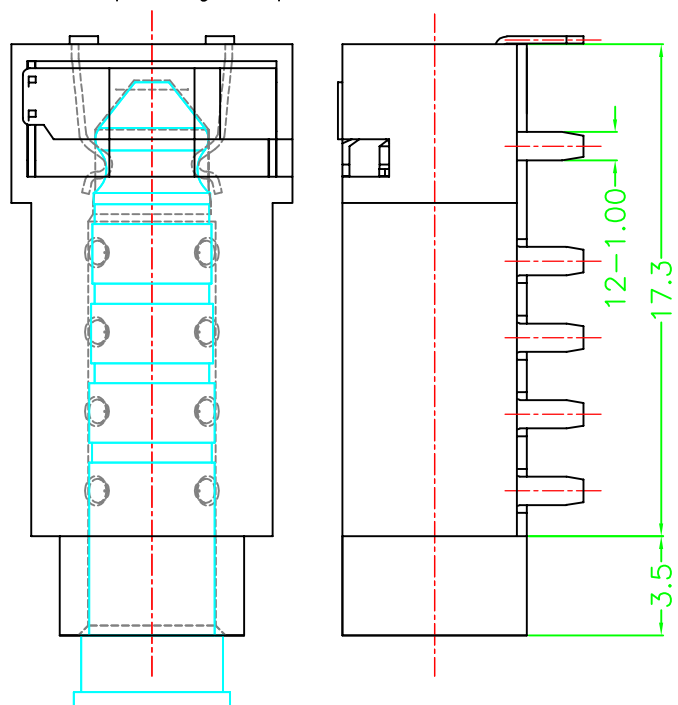


RoHS Compliant

Notes:

- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance: 50mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./500V DC
- 4.Dielectric Withstanding Voltage: 500V AC/1Minute
- 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 6.Durability: 5,000 Cycles
- 7.Operating Temperature:-25°C to+85°C



15	Sleeve	Copper Alloy	G/F Plated Overall.
14	Separator	Thermoplastics	Black UL 94-V0
13	Housing	Stainless Steel	
12	Switch-B(+)		
11	Switch-A(-)		
5/10	Left+ Contact	Copper Alloy	G/F On Contact Area & Solder Tails Ni Plated Overall.
4/9	Right+ Contact		
3/8	Left- Contact		
2/7	Right- Contact		
1/6	GND Contact		

Item	Name	Material	Description
UNLESS OTHERWISE, GENERAL TOLERANCE:		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X.xx	±0.15	TITLE: Ø4.4mm 5Pole Audio Jack H6.0mm 12Pin W/Switch(Norma Close) THIRD ANGLE PROJECTION  P/N: XB-J2033R12YL003 MODEL: DRAW NO.: _____	
X.x	±0.20		
X.	±0.30		
ANGULAR:			
X.x	±1°	UNIT: mm SCALE: 1:1 SIZE: A4 SHEET: 1/1	
X.	±2°		

				DESIGN	WZH	2020.07.10	
				CHECK	WZH	2020.07.10	
				APPROVAL	LJF	2020.07.10	
ECN NO.	REV.	DESCRIPTION	DATE	CHANGE	APPROVAL	LJF	2020.07.10