
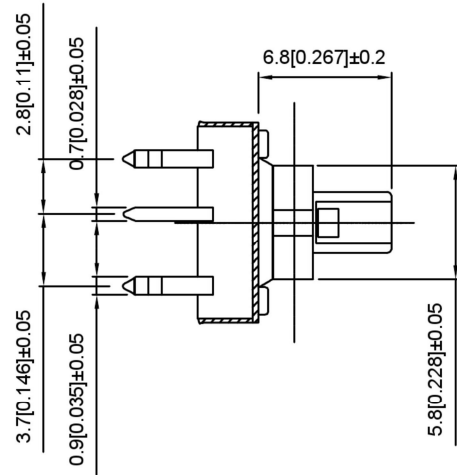
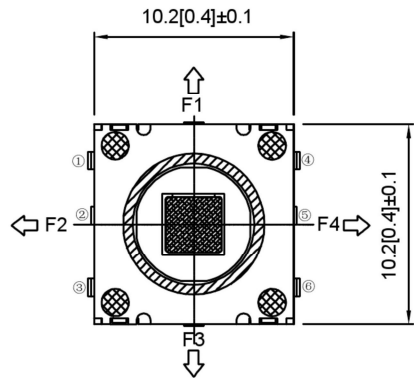
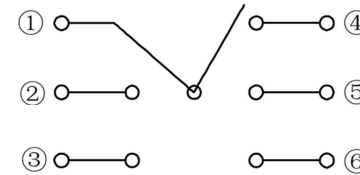
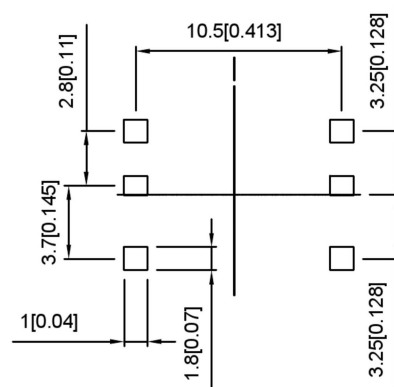


Technical parameter	
Rated load:	0.1A DC12V
Insulation resistance:	100M Ω min(DC100V)
Compressive strength:	AC100V(50/60Hz foy 1 minute)
life:	50,000 cycles
Operating temperature:	-10° c +60 ° c
Operating strength:	4-150±50gf
	1-250±50gf

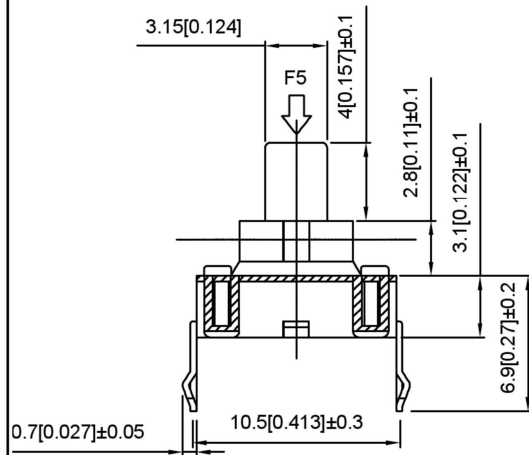

	1	2	3	4	5	6
F1	o			o		
F2	o	o				
F3	o					o
F4	o			o		
F5	o	o				

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑦		—				—
⑥	Contact	—	5	F.ag/Brass	Plating silver	—
⑤	Terminal	—	6	Brass(0.15t)	Plating silver	—
④	Base	—	1	Lcp		—
③	Cover	—	1	Sus		—
②	Axle sleeve	—	1	Lcp		—
①	Knob	—	1	PA66		—

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	MULTI-FUNCTIONAL SWITCH
CHKD		UNIT: mm/in	PART NO.: TM-2028
APPD		SIZE: A4	DWG NO.:
		WEIGHT	SHEET
			1/1
		REVISI	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD