


**SPECIFICATION**

Contact Rating: 50mA, 12V DC  
 Contact Resistance: 100mΩ max  
 Insulation Resistance: 100mΩ min. 500V DC  
 Dielectric Strength: 250V AC/1minute  
 Travel: 0.25mm  
 Operating Temp: -20°C ~ +70°C  
 Storage Temp: -30°C ~ +80°C

PAPT NO	TC-1101T-X-X-X
<b>Operating Force</b>	A:100gf B:160gf C:260gf
Height	A:H:4.3 B:H:5.0
Colour	B:Black W:White

**P.C.B MOUNTING HOLES**

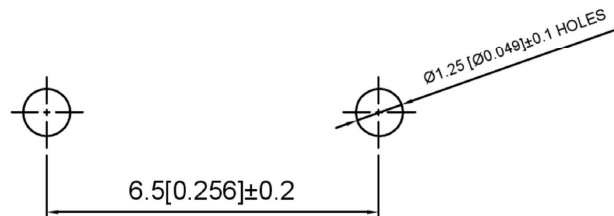

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	LCP		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
<a href="http://www.alpsr.com">www.alpsr.com</a> <a href="http://www.gdxjdz.com">www.gdxjdz.com</a> <a href="http://www.xbswitch.com">www.xbswitch.com</a>					



DSND		SCALE: N/A	MODEL TYPE: <b>TACT SWITCH</b>
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	<b>TC-1101T-X-X-X</b>
		WEIGHT	SHEET
		1/1	REVISIC
			A0

DONG GUAN XI BANG ELECTRONIC CO., LTD