

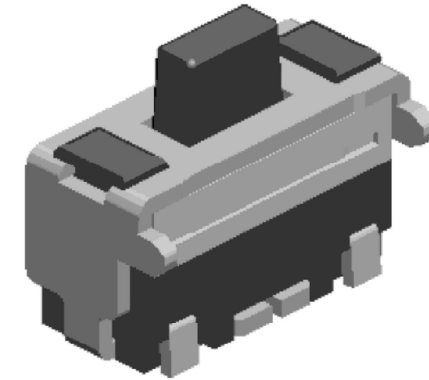
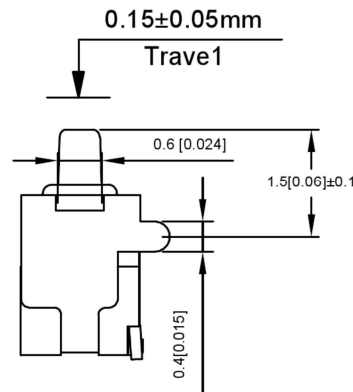
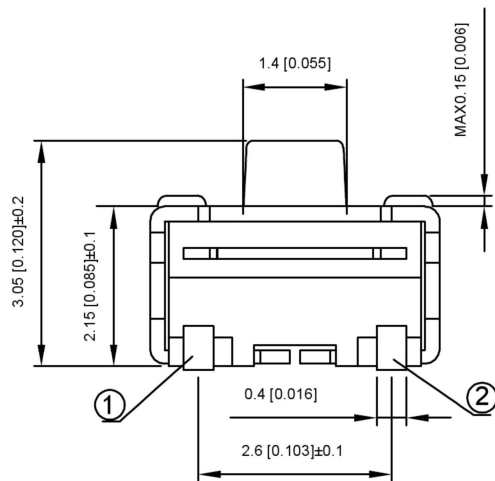


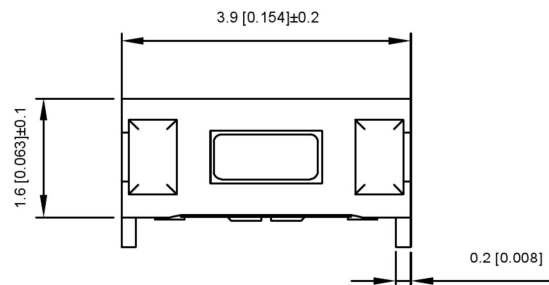


SPECIFICATION

Contact Rating: 50mA 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100MΩ min.500V DC
 Dielectric Strength: 250V AC/1 minute
 Travel: 0.15mm
 Operating Temp: -25℃ +70℃
 Storage Temp: -30℃ +80℃

CIRCUIT



P.C.B LATOUT

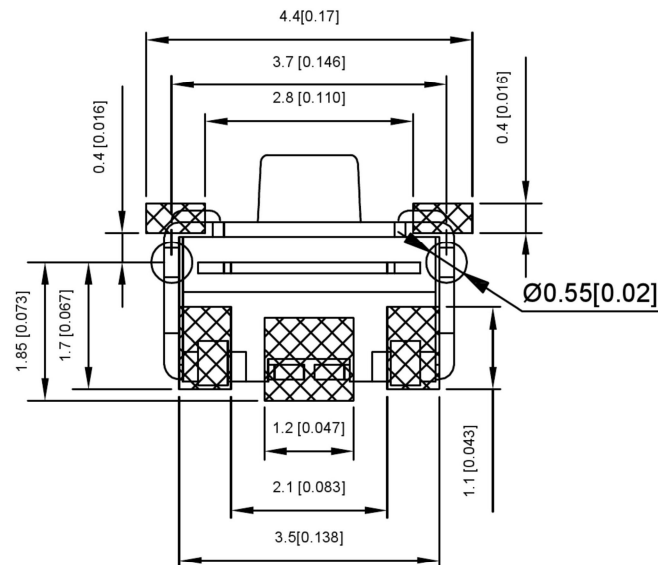

PAPT NO	TS-1010GS-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:3.05

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	2	F.ag/SUS		—
③	Base	—	1	LCP	Natural	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	LCP		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH		
DWN		VIEW: 			
CHKD		UNIT: mm/in	PART NO.: TS-1010GS-X		
APPD		SIZE: A4			
			DWG NO.:		
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISI
				1/1	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD