



**SPECIFICATION**

Contact Rating: 50mA, 12V DC  
 Contact Resistance: 100mΩ max  
 Insulation Resistance: 100mΩ min. 500V DC  
 Dielectric Strength: 250V AC/1minute  
 Travel: 0.25mm  
 Operating Temp: -40°C~+90°C  
 Storage Temp: -30°C~+80°C

PAPT NO	TC-111A-X
Operating Force	A:130gf B:200gf C:300gf D:500gf
Height	H:6.65



P.C.B Mounting hole dimensionis

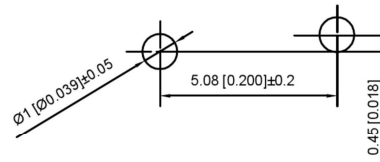

It is suggested to use P,C,B Board of 1.6mm thick

ITEM	PAPT NAM	FTER,NC	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/SUS	Natural	—
③	Base	—	1	Pa46	—	—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Steel ball	—	—

DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
			ANGULAR ±5°
			L ≤ 4 ±0.2
			4 < L ≤ 16 ±0.3
			16 < L ≤ 63 ±0.4
			L > 63 ±0.5



DSND	SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN	VIEW:	PART NO.: TC-111A-X
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	
		WEIGHT
		SHEET 1/1
		REVISIC A0