


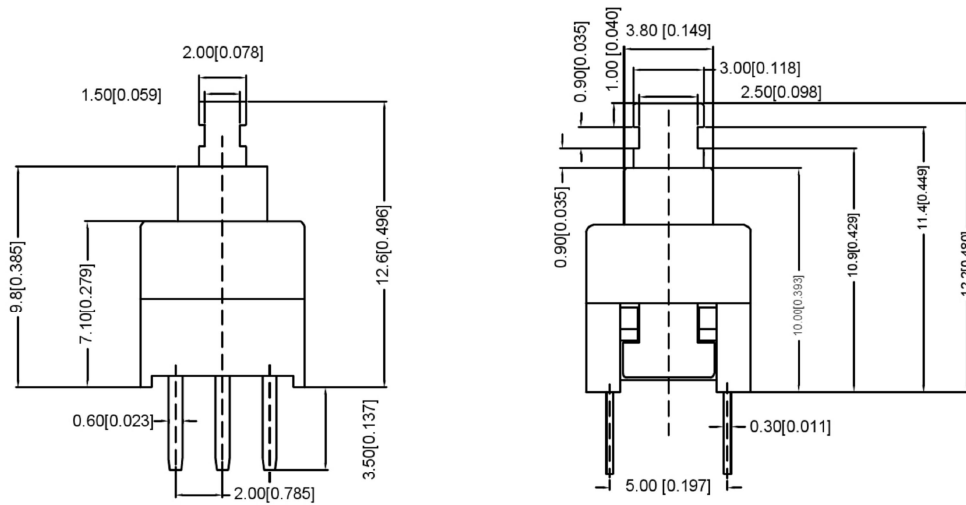




FEATURES

- Light operating force.
- Long term low contact resistance.
- Momentary or latching operation.
- Short stroke 1.9mm to latch.
- Compact spacing on PCB of 7.0mm.



常态: 2-3导通 5-6导通
按下: 1-2导通 4-5导通

SPECIFICATIONS

1. ELECTRICAL

● Contact rating	0.1A30VDC
● Contact resistance	50mWMax.
● Insulation resistance	100MΩMin.at250VDC
● Dielectric strength	250VAC Min. for 60 sec

2. MECHANICAL AND ENVIRONMENTAL

● Temperature rating	Storage:-25°Cto +65°C Operating:-15°Cto+55°C
● Operation force	160+80gf
● Stroke	Lock Stroke:1.9±0.2mm Full Stroke:2.4±0.2mm
● Operating life	full load: 1x10 ⁴ cycles no load: 1x10 ⁵ cycles
● Contact form	DPDT

PAPT NO	XB7070-X
OPERATION	W:NO LOCK Z:LOCK

⑦	Contact	—	2	Phosphor bronze	Plating silvering	—
⑥	Terminal	—	6	Brass	Plating silvering	—
⑤	Spring	—	1	Sus	Natural	—
④	Base	—	1	Pbt	—	—
③	Crochet Needle	—	1	Sus	Natural	—
②	Cover	—	1	Pom	—	—
①	Keystake	—	1	Pom	—	—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

DSND	SCALE: N/A	MODEL TYPE: KEY SWITCH	
DWN	VIEW:	PART NO.: XB7070-X	
CHKD	UNIT: mm/in	DWG NO.:	
APPD	SIZE: A4		
	WEIGHT	SHEET	REVISI
		1/1	A0



DONG GUAN XI BANG ELECTRONIC CO., LTD

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	

DATE	REVISED	APPROVED
------	---------	----------