

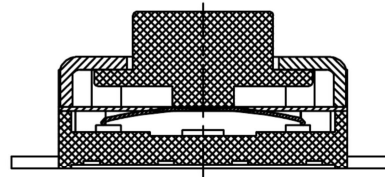



**SPECIFICATION**

Contact Rating: 50mA, 12V DC  
 Contact Resistance: 100mΩ max  
 Insulation Resistance: 100mΩ min. 500V DC  
 Dielectric Strength: 250V AC/1minute  
 Travel: 0.13mm  
 Operating Temp: -30°C~+85°C  
 Storage Temp: -30°C~+80°C

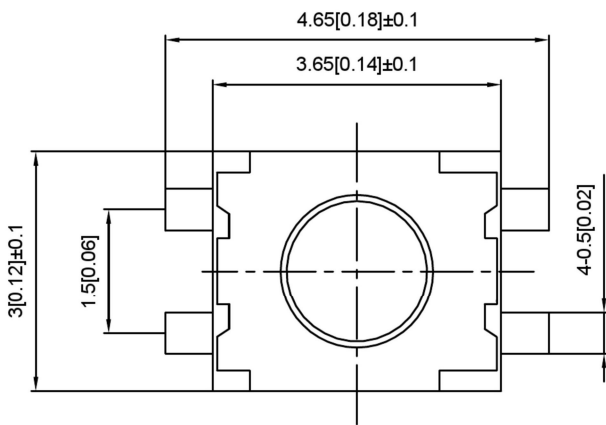

PAPT NO	TS-1185EC-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:A:1.8 B:1.85 C:1.92 D:2.0 E:2.5
Fixed column	B:black W:white

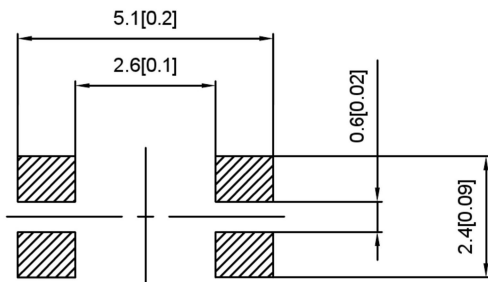

ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Lcp		—

DATE	REVISED	APPROVED	ANGULAR	±5°
			L ≤ 4	±0.2
			4 < L ≤ 16	±0.3
			16 < L ≤ 63	±0.4
			L > 63	±0.5



DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		VIEW:	PART NO.: TS-1185EC-X-X-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	