
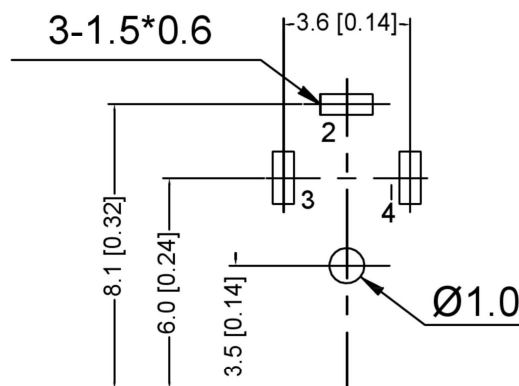
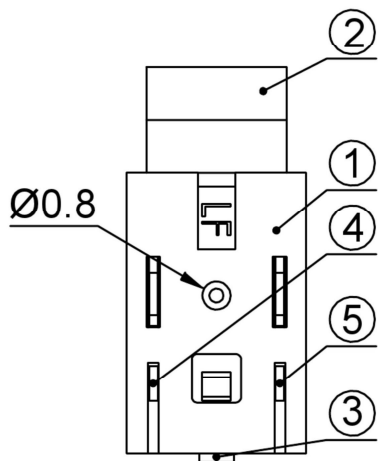
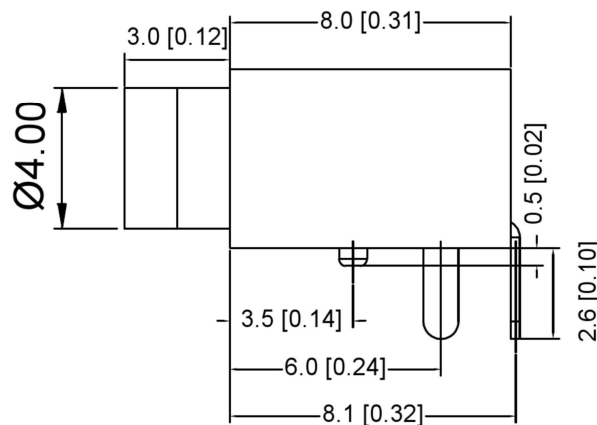


Ø2.6±0.05

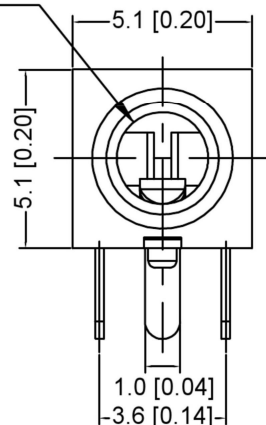

PCB HOLES(TOP VIEW)
GENERAL TOLERANCE:0.1MM

NOTES:

1.ELECTRICALCHARACTERS:

1-1.RATING:DC 30V 0.5A:

1-2.CONTATCT RESISTANCE:<30mΩ;

1-3.INSULATION RESISTANCE:>100MΩ

DC500V;


1-4.WITHSTANDING VOLTAGE:AC 500V 1min;

1-5.LIFE:5.000CYCLES:

2.MECHANICALCHARACTERISTICS:

2-1.INSERTION&EXTRACTION FORCE:3~30N:

2-2.OPERATINC TEMPERATURE:-30°C~+70°C:



⑤	TERMINAL	4	1	Manganese steel t=0.25	SnSb	PLATED
④	TERMINAL	3	1	Manganese steel t=0.25	SnSb	PLATED
③	TERMINAL	2	1	Manganese steel t=0.25	SnSb	PLATED
②	AXLE SLEEVE		1	H59	CuSn	PLATED
①	HOUSING		1	PA66		BLACK

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	2.5 PHONE JACK
CHKD		UNIT: mm/in	PART NO.: PJ-210A
APPD		SIZE: A4	DWG NO.:
			WEIGHT
			SHEET
			REVISION
			1/1
			A0