

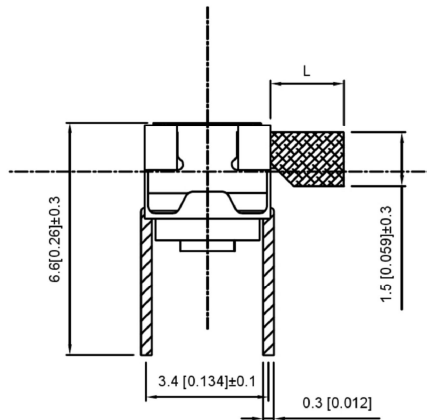
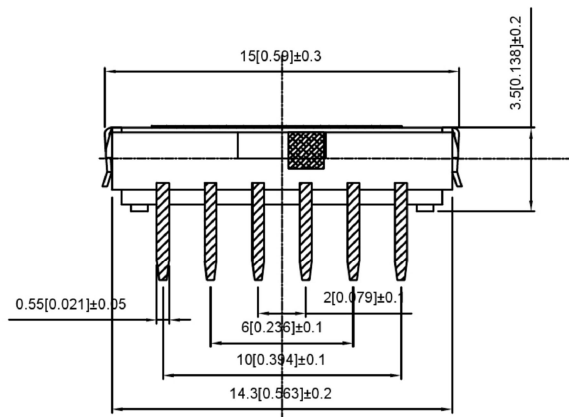
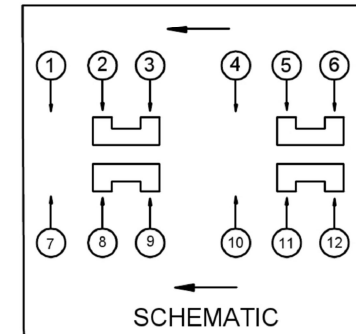
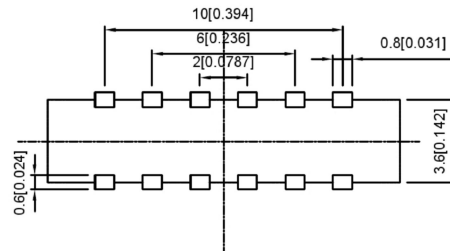


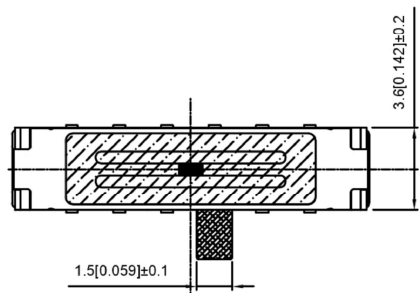

NOTE:
Rating: DC 12V 50mA
Operating Force: 200±100gf
Lifetime: 10,000 Cycles

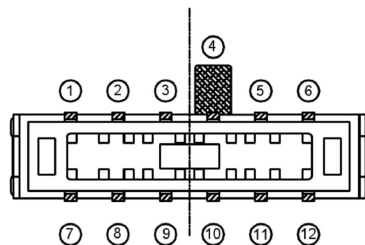

PAPT NO	L
SK-3268D-L1	2.0
SK-3268D-L2	3.0
SK-3268D-L3	4.0

		---				---
		---				---
5	Terminal	---	12	Brass (0.30t)	ag Plated	---
4	Contact spring	---	1	Phosphor bronze	ag Plated	---
3	Base	---	1	Ppa	Black	---
2	Cover	---	1	Sus	Natural	---
1	Keystake	---	1	Pa46	Black	---
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°	DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
				L ≤ 4	±0.2	DWN		VIEW:	PART NO.: SK-3268D-X
				4 < L ≤ 16	±0.3	CHKD		UNIT: mm/in	DWG NO.:
				16 < L ≤ 63	±0.4	APPD		SIZE: A4	
				L > 63	±0.5				
				UNSPECIFIED TOLERANCES					
		DATE	REVISED	APPROVED					WEIGHT
									SHEET
									1/1
									REVISIC
									A0

