
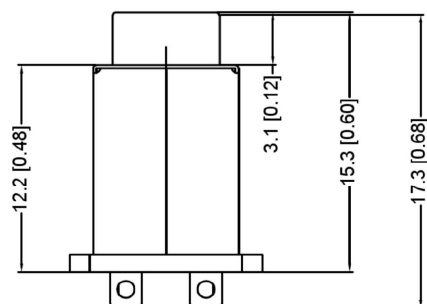
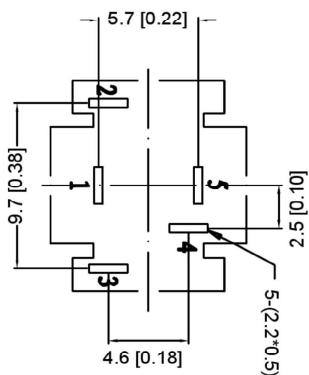

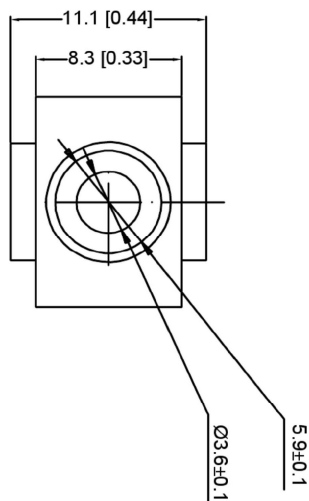


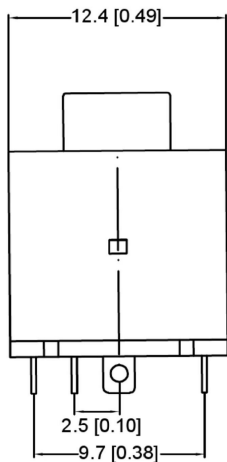

Temperature	-20~70 C
Rated Load	DC 30V 0.3A
Contad Resistance	<0.03
Insulation Resistance	>100M
Withstand Voltage	AC500V(50H z)/mi
Actuating Force	2.2~35N
Li fe	3000 N

PIN	PJ-378-X
Schematic	1 2 3 4 5 G:Green R:Red

	MATERIAL	PLATING
termina 1	Phosphor Bronze	ag
termina 2	Phosphor Bronze	ag
termina 3	Phosphor Bronze	ag
termina 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
copper bush	Brass	tin
base	PBT	
cover	PA66	
Shell	SUS	
Plastic	PA66	

							DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK			
							DWN		VIEW: 	PART NO.: PJ-378-X			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				
				DATE	REVISED	APPROVED					WEIGHT	SHEET	REVISION
REVISIONS												1/1	A0
UNSPECIFIED TOLERANCES													
www.alpsr.com www.gdxjdz.com www.xbswitch.com													