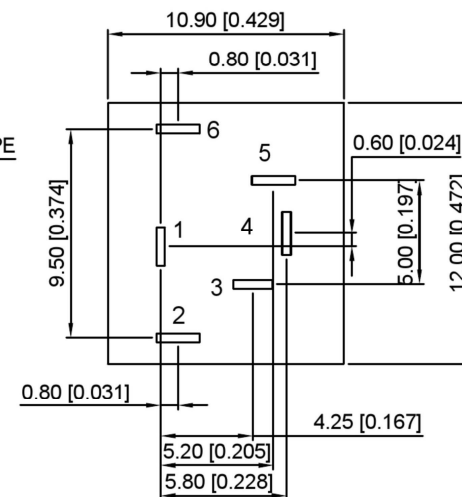
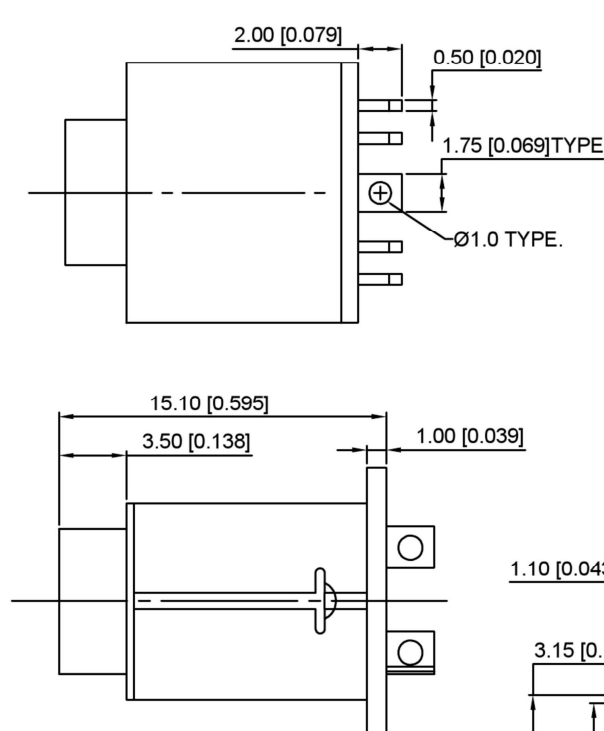
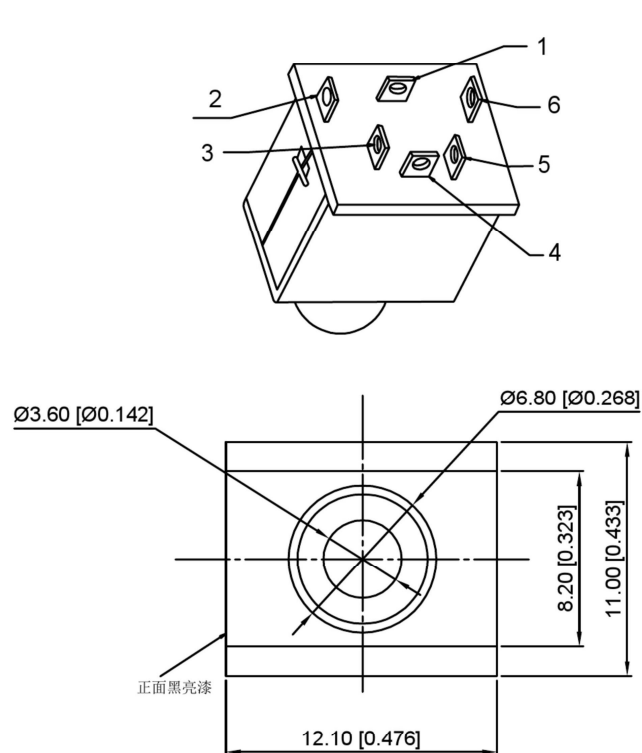


NOTES:

1.0 RATING

1.1 TEMPERATURE:-25℃ TO +75℃;

2.1 INSULATION RESISTANCE:100M AT 500V DC

2.2 DIELECTRIC STRENGTH:AC 500V,60Hz FOR 1MINUTE;

3.0 MATERIALS


3.1 HOUSING:THERMOPLASTIC;

3.2 CONTACT:COPPER ALLOY

4.0 INSERTION & EXTRACTION FORCE

4.1 INSERTION & EXTRACTION:1.0 TO 2.5kgf;

AFTER LIFE TEST:0.3 TO 2.5 kgf;



	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Phosphor Bronze	tin
terminal 5	Phosphor Bronze	tin
terminal 6	Phosphor Bronze	tin
plastic	Pbt	

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
				ANGULAR ±5°
				L ≤ 4 ±0.2
				4 < L ≤ 16 ±0.3
				16 < L ≤ 63 ±0.4
				L > 63 ±0.5

www.alpsr.com www.gdxdz.com www.xbswitch.com



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-378B
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0